

UTILITY PATENT APPLICATION TRANSMITTAL <small>(Only for new nonprovisional applications under 37 CFR 1.53(b))</small>	Attorney Docket No.	1794-B-DIV-4	Total Pages	see postcard
	First Named Inventor or Application Identifier			
	1794-B-DIV-4			
	Express Mail Label No.	EM104360188US		

APPLICATION ELEMENTS <small>See MPEP chapter 600 concerning utility patent application contents.</small>	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
1. <input checked="" type="checkbox"/> Fee Transmittal Form <small>(Submit an original, and a duplicate for fee processing)</small>	6. <input type="checkbox"/> Microfiche Computer Program (Appendix)
2. <input checked="" type="checkbox"/> Specification [Total Pages <u>43</u>] <small>(preferred arrangement set forth below)</small> <ul style="list-style-type: none">- Descriptive title of the invention- Cross References to Related Applications- Statement Regarding Fed sponsored R & D- Reference to Microfiche Appendix- Background of the invention- Brief Summary of the invention- Detailed Description- Claim(s)- Abstract of the Disclosure	7. Nucleotide and/or Amino Acid Sequence Submission <small>(if applicable, all necessary)</small> <ul style="list-style-type: none">a. <input type="checkbox"/> Computer Readable Copyb. <input type="checkbox"/> Paper Copy (identical to computer copy)c. <input type="checkbox"/> Statement verifying identity of above copies.
3. <input checked="" type="checkbox"/> Drawing(s) (35 USC 113) [Total Sheets <u>20</u>]	ACCOMPANYING APPLICATION PARTS 8. <input type="checkbox"/> Assignment Papers (cover sheet & document(s)) 9. <input type="checkbox"/> 37 CFR 3.73(b) Statement <input type="checkbox"/> Power of Attorney <small>(when there is an assignee)</small> 10. <input type="checkbox"/> English Translation Document (if applicable) 11. <input checked="" type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input checked="" type="checkbox"/> Copies of IDS Citations 12. <input checked="" type="checkbox"/> Preliminary Amendment 13. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) <small>(Should be specifically itemized)</small> 14. <input type="checkbox"/> Small Entity Statement(s) <input type="checkbox"/> Statement filed in prior application, Status still proper and desired 15. <input type="checkbox"/> Certified Copy of Priority Document(s) <small>(if foreign priority is claimed)</small> 16. <input checked="" type="checkbox"/> Other: Check for \$954.00
4. Oath or Declaration [Total Pages <u>5</u>] <ul style="list-style-type: none">a. <input type="checkbox"/> Newly executed (original or copy)b. <input checked="" type="checkbox"/> Copy from a prior application (37 CFR 1.63(d)) <small>(for continuation/divisional with Box 17 completed)</small> [Note Box 5 below]i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).	
5. <input checked="" type="checkbox"/> Incorporation By Reference <small>(Useable if Box 4b is checked)</small> The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being a part of the disclosure of the accompanying application and is hereby incorporated by reference therein.	

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☒ Continuation of prior application No: 08/747,811 ☐ Divisional ☐ Continuation-in-part (CIP)**18. CORRESPONDENCE ADDRESS**☐ Customer Number of Bar Code Labelor ☒ Correspondence address below

(Insert Customer No. or Attach bar code label here)

NAME	Stephen C. Beuerle				
	Lyon & Lyon LLP				
ADDRESS	633 West Fifth Street, Suite 4700				
CITY	Los Angeles	STATE	CA	ZIP CODE	90071-2066
COUNTRY	U.S.A.	TELEPHONE	(619) 552-8400	FAX	

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

FEE TRANSMITTAL

Note: Effective October 1, 1997.
Patent fees are subject to annual revision.

Complete if Known

Application Number	
Filing Date	March 3, 1998
First Named Inventor	Stuart D. Edwards
Group Art Unit	
Examiner Name	
Attorney Docket Number	1794-B-DIV-4

Total Amount of Payment **1 (\$ 954)****METHOD OF PAYMENT (check one)**

1. ☒ The Commissioner is hereby authorized to charge indicated fees and credit any over payments to:
 Deposit Account Number 12-2475
 Deposit Account Name Lyon & Lyon LLP
☒ Charge Any Additional Fee Required Under 37 CFR 1.16 and 1.17 ☐ Charge the Issue Fee Set in 37 CFR 1.18 at the Mailing of the Notice of Allowance

2. ☒ Payment enclosed:
☒ Check ☐ Money Order ☐ Other

FEE CALCULATION**1. FILING FEE**

Large Fee Code	Entity Fee (\$)	Small Fee Code	Entity Fee (\$)	Fee Description	Fee Paid
101	790	201	395	Utility filing fee	790
106	330	206	165	Design filing fee	
107	540	207	270	Plant filing fee	
108	790	208	395	Reissue filing fee	
114	150	214	75	Provisional filing fee	
SUBTOTAL (1) (\$)					790

2. CLAIMS

	Extra	Fee from below	Fee Paid
Total Claims <u>12</u> - 20 = <u>0</u>	X	<u>0</u>	= <u>0</u>
Independent Claims <u>5</u> - 3 = <u>2</u>	X	<u>164</u>	= <u>164</u>
Multiple Dependent Claims	X		=

Large Fee Code	Entity Fee (\$)	Small Fee Code	Entity Fee (\$)	Fee Description
103	22	203	11	Claims in excess of 20
102	82	202	41	Independent claims in excess of 3
104	270	204	135	Multiple dependent claim
109	82	209	41	Reissue independent claims over original patent
110	22	210	11	Reissue claims in excess of 20 and over original patent

SUBTOTAL (2) (\$) 164**FEE CALCULATION (continued)****3. ADDITIONAL FEES**

Large Fee Code	Entity Fee (\$)	Small Fee Code	Entity Fee (\$)	Fee Description	Fee Paid
105	130	205	65	Surcharge - late filing fee or oath	
127	50	227	25	Surcharge - late provisional filing fee or cover sheet.	
139	130	139	130	Non-English specification	
147	2,520	147	2,520	For filing a request for reexamination	
112	920*	112	920*	Requesting publication of SIR prior to Examiner action.	
113	1,840*	113	1,840*	Requesting publication of SIR after Examiner action.	
115	110	215	55	Extension for reply within first month.	
116	400	216	200	Extension for reply within second month.	
117	950	217	475	Extension for reply within third month.	
118	1,510	138	1,510	Extension for reply within fourth month.	
128	2,060	228	1,030	Extension for reply within fifth month.	
119	310	219	155	Notice of Appeal	
120	310	220	155	Filing a brief in support of an appeal	
121	270	221	135	Request for oral hearing	
138	1,510	138	1,510	Petition to institute a public use proceeding	
140	110	240	55	Petition to revive - unavoidable	
141	1,320	241	660	Petition to revive - unintentional	
142	1,320	242	660	Utility issue fee (or reissue)	
143	450	243	225	Design issue fee	
144	670	244	335	Plant issue fee	
122	130	122	130	Petitions to the Commissioner	
123	50	123	50	Petitions related to provisional applications	
126	240	126	240	Submission of Information Disclosure Stmt	
581	40	581	40	Recording each patent assignment per property (times number of properties)	
146	790	246	395	Filing a submission after final rejection (37 CFR 1.129(a))	
149	790	249	395	For each additional invention to be examined (37 CFR 1.129(b))	

Other fee (specify) _____

Other fee (specify) _____

* Reduced by Basic Filing Fee Paid

SUBTOTAL (3) \$ _____**SUBMITTED BY**

Typed or Printed Name	Stephen C. Beuerle
Signature	<i>Stephen C. Beuerle</i>
Date	March 3, 1998

Complete (if applicable)

Reg. Number	38,380
Deposit Account User ID	

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

1794-B-DIV-4
232/061
Patent

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

Stuart D. Edwards, et al.

Serial No: Not yet assigned

Filed: Herewith

For: **CARDIAC MAPPING AND
ABLATION SYSTEMS**

Group Art Unit: Not yet assigned

Examiner: Not yet assigned

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir/Madam:

Prior to examination of the above-captioned application, please amend the
application as follows:

CERTIFICATE OF MAILING

I hereby certify that this paper (along with any referred to as being attached or enclosed) is being deposited with the United States Postal Service on the date shown below with sufficient postage as Express Mail in an envelope addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

EM104360188US

JOY TAYLOR

Express Mail mailing no.

name of person mailing paper

March 3, 1998
date of deposit


signature of person mailing paper

In The Claims:

Please cancel claims 1-10 without prejudice.

Please add the following new claims 11-22:

11. An electrode assembly for sensing and ablating body tissue, comprising:
an expandable and collapsible structure having an electrode formed thereon, the
electrode configured to sense electrical events in the body tissue and ablate the body tissue.
12. An electrode assembly according to claim 11, wherein the electrode comprises a
conductive material substantially covering an exterior surface of the structure.
13. An electrode assembly according to claim 12, wherein the conductive material
is applied to the exterior surface of the structure by ion beam assisted deposition.
14. An electrode assembly according to claim 11, wherein the structure includes an
exterior surface having formed thereon a number of spaced apart conductive zones that act as
individual electrodes.
15. An electrode assembly according to claim 14, wherein the spaced apart
conductive zones comprise a conductive material applied by ion beam aided deposition.
16. An electrode assembly for sensing and ablating body tissue, comprising:
an expandable and collapsible body having an outer surface with an electrically
conductive material that occupies substantially all of the outer surface so that the body acts as
an individual sensing and ablating electrode.

17. An electrode assembly according to claim 16, wherein the electrically conductive material is applied by ion beam assisted deposition.

18. An electrode assembly for sensing and ablating body tissue, comprising:
an expandable and collapsible body having an outer surface with a number of spaced apart conductive zones configured to sense electrical events in the body tissue and ablate the body tissue.

19. An electrode assembly according to claim 18, wherein the spaced apart conductive zones comprise a conductive material applied by ion beam assisted deposition.

20. An electrode assembly for sensing body tissue, comprising:
an expandable and collapsible body, the body having an exposed outer surface, the outer surface substantially covered with an electrically conductive coating, whereby the body acts as an individual sensing electrode.

21. An electrode assembly according to claim 20, wherein the electrically conductive coating is applied using ion beam assisted deposition.

22. A method for constructing an electrode assembly, the electrode assembly configured to transmit electrical energy to body tissue, comprising:
providing an expandable and collapsible structure, and
applying an electrically conductive coating to the structure using ion beam aided deposition.


REMARKS

Applicants respectfully request that the foregoing amendment be entered before examination of the above-captioned application. Original claims 1-10 have been canceled, and new claims 11-22 added, to set forth further subject matter which Applicants regard as the invention.

Respectfully submitted,

LYON & LYON LLP

Date: March 3, 1998

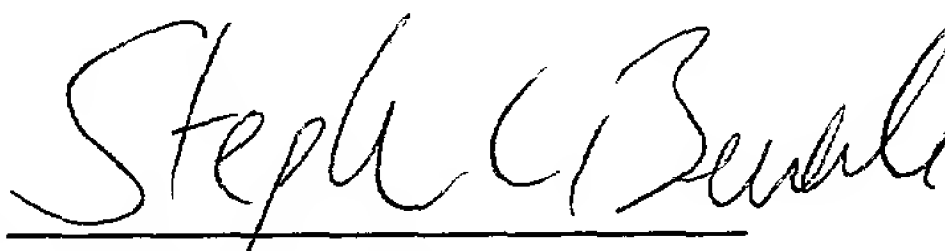By 
Stephen C. Beuerle
Reg. No. 38,380

First Interstate World Center
633 West Fifth Street, 47th Floor
Los Angeles, CA 90071-2066
619 552-8400

Patent

Docket No. 1794-B

**CARDIAC MAPPING AND ABLATION
SYSTEMS**

Field of the Invention

5 The invention relates to percutaneous leads and related systems and methods for mapping the interior regions of the heart for diagnosis of cardiac conditions.

Background of the Invention

10 Cardiac mapping is used to locate aberrant electrical pathways and currents emanating within the heart. The aberrant pathways cause the contractions of the heart muscle to take on peculiar and life threatening patterns or dysrhythmias.

15 Intracardiac mapping requires the careful positioning of an array of multiple electrodes within the heart. Various structures for these multiple electrode mapping arrays have been developed or proposed.

20 For example, Hess U.S. Patents 4,573,473 and 4,690,148 and Desai U.S. Patent 4,940,064 show the use of generally planar mapping arrays. Chilson U.S. Patent 4,699,147 shows the use of a three dimensional basket mapping array. Gelinas U.S. Patent 4,522,212
25 shows a spring apart array of electrode supporting fingers.

Regardless of the type of mapping array used, the physician is called upon to remotely move and manipulate the array within the heart in various ways. First, the physician must maneuver the array through a main vein or artery into a selected heart chamber. Then, the physician must locate the array at the desired endocardial location. Then, the physician must further move the array at the desired location to assure that all aberrant electrical pathways, if present, are located.

The development of prior mapping arrays has focused upon the requirements of mapping function itself. The prior development has overlooked the important need to continuously and variously move and manipulate the mapping array before, during, and after the mapping function.

Summary of the Invention

An important aspect of the invention relates to providing a novel and improved construction for electrode carrying splines for improved cardiac mapping and ablation devices.

Briefly summarized the present invention provides an electrode assembly for use in interventional cardiac mapping and probes formed thereby. The assemblies of the present invention involve the use of one or more elongated splines each of which carries a plurality of spaced apart electrodes thereon. Each spline has a means for attaching its proximal end to a supporting means, preferably the distal end of a flexible hollow tube located within the catheter. Each spline can further be provided with means to attach the distal end thereof to an end cap to form a mapping array or basket.

The body of each spline is formed of a plurality of alternating electrically conductive layers

and the electrically non-conductive layers. A separate electrically conductive pathway is provided to connect each of the electrodes to a different one of the conductive layers. Each of the layers is electrically connected to an electrical signal processing device so that signals provided by each of the electrodes can be processed.

In accordance with one embodiment of the invention, the spline can be of a circular cross-section with each of the alternating conductive and non-conductive layers being in the form of concentric rings and each of the electrodes is in the form of a ring encircling the outer surface of the spline.

In accordance with a further embodiment of the invention, the electrode can be of an anisotropic rectangular cross-sectioned configuration. An array or basket formed of such splines provides a stable configuration resistant to twisting and thus insures accuracy and reliability of the cardiac mapping procedure.

Brief Description of the Drawings

Fig. 1 is a perspective view of an endocardial mapping system that embodies the features of the invention;

Fig. 2 is a top view of the probe associated with the system shown in Fig. 1, showing the operation of the steering mechanism;

Figs. 3 and 4 are side elevation views of the probe associated with the system shown in Fig. 1, showing the operation of the deployment mechanism for the mapping array;

Figs. 5 to 7 are side elevation views of the probe associated with the system shown in Fig. 1, showing the operation of the mechanism for opening and shaping the mapping array;

Fig. 8 is a side elevation view of the probe associated with the system shown in Fig. 1, showing the operation of the mechanism for rotating the mapping array;

5 Fig. 9 is an exploded side elevation view of the probe associated with the system shown in Fig. 1;

Fig. 10 is an enlarged side section view of the interior of the probe body shown in Fig. 9, when assembled, where the proximal end of the catheter joins the main probe body;

10 Fig. 11 is an enlarged side section view of the interior of the tip of the probe handle shown in Fig. 9, when assembled;

Fig. 12 is an enlarged side sectional view, with portions broken away, of the mapping basket associated with the system shown in Fig. 1;

15 Fig. 13 is an enlarged perspective view, with portions broken away, of a cylindrical electrode support spline that the mapping basket shown in Fig. 12 can use;

20 Fig. 14 is a greatly enlarged sectional view of the cylindrical electrode support spline taken generally along line 14-14 in Fig. 13;

25 Fig. 15 is an enlarged perspective view of a rectilinear spline that the mapping basket shown in Fig. 12 can use;

Fig. 16 is a perspective view of the rectilinear spline shown in Fig. 15 before attachment of the electrodes;

30 Fig. 17 is an enlarged perspective view of an alternative embodiment of a rectilinear spline that the mapping basket shown in Fig. 12 can use;

35 Fig. 18 is an exploded perspective view of the rectilinear spline shown in Fig. 15, showing its multiple conductive and nonconductive layers;

Fig. 19 is a schematic exploded side view of the multiple conductive and nonconductive layers of the rectilinear spline shown in Fig. 18;

Fig. 20 is an enlarged perspective view, largely schematic, of the solid state circuit tube and one of eight microconnector chips associated with the mapping assembly shown in Fig. 1;

Fig. 21 is top view of the electrical attachment between microconnector chips and the solid state circuit tube shown in Fig. 20;

Fig. 22 is an enlarged perspective view, largely schematic, of an alternative embodiment for the solid state circuit tube and the microconnector chips associated with the mapping assembly shown in Fig. 1;

Fig. 23 is a schematic view of a power supply and signal control circuit for the microconnector shown in Figs. 20 and 21;

Fig. 24 is a schematic view of an alternative power supply and signal control circuit for the microconnector shown in Fig. 22;

Fig. 25 is a top view of the interior of the steering mechanism associated with the probe shown in Fig. 1;

Fig. 26 is a view of the distal end of an alternative catheter having a mapping assembly that is located using a guide wire, instead of a steering mechanism;

Fig. 27 is an enlarged view of the end cap of the mapping assembly shown in Fig. 26;

Figs. 28 and 29 are side section views of an alternative deployable mapping assembly using an inflatable bag;

Figs. 30A and B are side section views of an alternative deployable mapping assembly using a flexi-

ble sail-like body;

5 Figs. 31A/B/C are side section views of an alternative deployable mapping assembly using a central spline with random electrode support filaments;

Figs. 32A and B are side section views of an alternative deployable mapping assembly using a foam body;

10 Fig. 33 is a side section view of the base member of a dynamic mapping assembly that embodies the features of the invention shown in a contracted condition;

15 Fig. 34 is a side section view of the dynamic mapping assembly associated with the base member shown in Fig. 33 in a contacted condition;

Fig. 35 is a side section view of the base member of a dynamic mapping assembly that embodies the features of the invention shown in an expanded condition; and

20 Fig. 36 is a side section view of the dynamic mapping assembly associated with the base member shown in Fig. 35 in an expanded condition.

Description of the Preferred Embodiments

25 Fig. 1 shows an endocardial mapping system 10 that embodies the features of the invention. The system 10 includes a hand-held probe 12 and an associated controller 14.

30 The probe 12 has a handle 16 and an attached flexible catheter 18. The catheter 18 slidably carries within an interior lumen a mapping assembly 20 that is extendable out of the distal end of the catheter.

35 The mapping assembly 20 establishes a three dimensional array of electrodes 22. In use, the mapping assembly 20 records the activation times, the

distribution, and the waveforms of the electrical charges or potentials that trigger the pumping action of the heart muscle.

5 Leads 24 pass through the lumen of the catheter and connect the mapping assembly 20 to the controller 14. The controller 14 receives and processes the potentials recorded by the electrodes 22 on the mapping assembly 20. An attached CRT 26 visually presents the processed data for viewing by the attending physician. The controller 14 also has a printer 10 28 for presenting the processed data in strip chart form.

15 The physician positions the mapping assembly 20 by maneuvering the catheter 18 through a main vein or artery (which is typically the femoral artery) into a selected heart chamber. During this time, the mapping assembly 20 is carried in a compact, folded away position within distal end of the catheter 18 (as Fig. 3 shows). The physician can observe the progress of the distal catheter end using fluoroscopic or ultrasound imaging, or the like. 20

25 When the physician places the distal end of the catheter 18 in the desired endocardial location, he/she manipulates the control mechanisms of probe 12 to deploy and open the mapping assembly 20 into the desired three dimensional array 22 (as Fig. 1 shows).

30 The controller 14 analyses the signals received from the electrodes 22 to locate abnormal foci in the tissue that disrupt the normal heart rhythm and can cause cardiac arrhythmia. Once located, the physician can remove or destroy the abnormal foci by ablation to restore a normal heart rhythm. A separate RF or microwave ablation probe (not shown) can be used for this purpose. Alternatively, the mapping array 22 can itself include one 35

or more ablating electrodes.

According to one aspect of the invention, the probe 12 includes four independent control mechanisms for the physician to manipulate in carrying out the multiple steps of the mapping procedure just generally outlined. The control mechanisms are centrally located on the handle 16 to simplify error free manipulation of the catheter 18 and associated mapping assembly 20.

The first control mechanism 30 deflects the distal end of the catheter 18 (as Fig. 2 shows). This allows the physician to remotely point and steer the distal end of the catheter 18 within the body.

When the mapping assembly 20 is deployed, the first mechanism 30 can also be used to point and steer the mapping assembly 20 itself. This allows the physician to remotely maneuver the mapping assembly 20 into position against endocardial tissue.

The second mechanism 32 controls the deployment of the mapping assembly 20. The second mechanism 32 controls deployment of the mapping assembly 20 from a retracted position within the distal end of the catheter 18 (shown in Fig. 3) to an operating position outside the catheter 18 (shown in Fig. 4).

When retracted, the mapping assembly 20 occupies a low profile position that does not hinder the maneuvering within the body. When deployed in the operating position, the mapping assembly 20 can be opened to carry out its signal mapping function.

The third mechanism 34 opens the mapping assembly 20, when deployed. The third mechanism 34 moves the mapping assembly 20 between its completed closed, folded position (shown in Fig. 4) and an completely opened, unfolded position (shown in Fig. 5).

In the illustrated and preferred embodiment, the third mechanism 34 also controls the three dimensional shape of the mapping assembly 20. In this arrangement, the physician can remotely shape the mapping assembly 20 by manipulating the third mechanism 34.

In the illustrated embodiment, the third mechanism 34 progressively changes shape of the mapping assembly 20 from an elongated ellipse (as Fig. 7 shows), to an intermediate sphere (as Fig. 5 shows), to a toroid (as Fig. 6 shows). Using the third mechanism 34 for this purpose, the physician can alter the shape of the mapping assembly 20 to more closely match the particular endocardial profile to be recorded.

The fourth mechanism 36 controls the rotational position of the mapping assembly 20 independent of the rotational position of the catheter 18 (as Fig. 8 shows). In other words, the fourth mechanism 36 rotates the mapping assembly 20 without rotating the catheter 18.

Using the fourth mechanism 36, the physician can rotate the mapping assembly 20 within the heart, without otherwise rotating the catheter 18 within the access vein or artery.

The structural features of the catheter, the mapping assembly 20, and the associated control mechanism 30-36 can vary. These features will now be discussed in greater detail, as they appear in the illustrated embodiments.

1. The Probe Handle

In the illustrated embodiment (as Figs. 9 to 11 show), the probe handle 16 includes a main body 38, a base 40, and a tip 42. The handle 16 and its com-

ponent parts can be constructed from various durable metal or plastic materials. In the illustrated embodiment, the handle 16 is mostly molded plastic.

5 The main body 38 has an interior channel 44 (see Fig. 10). A junction tube 46 is secured within the interior channel 44. The proximal end of the catheter 18 is, in turn, joined by adhesive or the like to the front end of the junction tube 46. As Fig. 10 also shows, the interior channel 44 also includes
10 an annular groove 48 near its distal end, where the separately molded tip 42 is attached.

15 The handle base 40 is a premolded extension of the main body 38 (see Fig. 9). The base 40 is generally flat and carries a steering member 50. As will be described in greater detail later, the steering member 50 houses an actuator for the first control mechanism 30 to point and steer the distal end of the catheter 18.

20 The steering member 50 is also movable within a track 52 fore and aft upon the base 40 (see Figs. 1 and 2 also). A telescopic shaft 54 connects the steering member 50 to the rear end of the junction tube 46. Fore and aft movement of the steering member 50 within the track 52 expands and collapses the tele-
25 scopic shaft 54.

30 As will also be described in greater detail later, the fore and aft movement of the steering member 50 actuates the third control mechanism 34 to open and (in the preferred embodiment) shape the mapping assembly 20.

35 The handle tip 42 extends from the front of the main body 38. It includes a proximal flanged end 56 which seats within the annular groove 48 of the main body channel 44 (as Figs. 9 and 10 show).

The flanged end 56 freely rotates within the

annular groove 48. This allows the handle tip 42 to rotate relative to the main body 38. As will be described in greater detail later, the relative rotation between the handle tip 42 and main body 38 forms the basis for the fourth control mechanism 36.

As Fig. 10 shows, the handle tip 42 includes a center bore 58 that is axially aligned with the interior channel 44 of the main body 38. A carriage 60 moves within the center bore 58. As will be described in greater detail later, the movable carriage 60 actuates the second control mechanism 32 to control deployment the mapping assembly 20.

2. The Catheter

The catheter 18 includes a flexible tube 62 having an interior bore or lumen 64 (see Fig. 12). The proximal end of the flexible tube 62 extends through the center tip bore 58 and into main body channel 44, where it is joined to the junction tube 46 (as Fig. 10 shows).

The flexible tube 62 may constructed in various ways. For example, it may comprises a length of stainless steel coiled into a flexible spring enclosing the interior bore 64.

In the illustrated and preferred embodiment, the tube 62 comprises a slotted, stainless steel tube. An array of slots 66 subtends the tube along its length. The slots 66 subtend less than one circumference of the shaft at an angle of between 270 to 300 degrees. The slots 66 are also preferably radially offset one from the other by about 30 to 120 degrees.

The slots 66 provide flexibility along the length of the tube 62. The pattern and arrangement of the slots 66 impart the necessary flexibility and torque transmission capabilities to tube 62.

Further details of the slotted tube 62 are disclosed in pending Lundquist U.S. Patent Application Serial No. 07/657,106 filed February 15, 1991 and entitled "Torquable Catheter and Method."

5 The catheter 18 also includes a sheath 68 enclosing the flexible tube 62. The sheath 68 is made from a plastic material, such as a polyolefin, polyurethane or polydimethylsiloxane. The sheath 68 has an inner diameter that is greater than the outer
10 diameter of the tube 62. In this way, the sheath 68 slides along the outside of the tube 62 in response to the second control mechanism 32, to selectively enclose or expose the appended mapping assembly 20.

3. The Mapping Assembly

15 The mapping assembly 20 may take various different forms. In the embodiment illustrated in Figs. 1 to 9, the mapping assembly 20 comprises a variably shaped basket 70, the details of which are best shown in Fig. 12.

20 The mapping basket 70 comprises a base member 72 attached to the distal end of the flexible catheter tube 62. The mapping basket 70 also includes an end cap 74. Generally flexible electrode supports or splines 76 extend in a circumferentially spaced
25 relationship between the base member 72 and the end cap 74. The splines 76 carry the spaced sensing electrodes 22. Electrodes can also be located on end cap 74.

30 The outer diameters of the base member 72 and end cap 74 are less than the interior diameter of the movable sheath 68 (Fig. 12 shows this relationship with respect to the base member 72, but the end cap 74 is shown enlarged to better show the details of its construction). End cap 74 is preferably rounded or
35 dome-shaped as shown. In this way, when moved toward

the distal end of the flexible tube 62, the sheath 68 moves over and captures the mapping basket 70 (in the flattened position) and only the dome-shaped end of cap 74 is exposed. When moved the opposite way, the sheath 68 exposes the mapping basket 70 for use. In addition to electrodes located on splines 76A, one or more electrodes can also be located on end cap 74 to provide for additional signal measuring capability.

Still referring to Fig. 12, the mapping basket 70 further includes a generally stiff control wire 78. The distal end of the control wire 78 is attached to the end cap 74. From there, the control wire extends through the base member 72 and the bore 64 of the tube 62 for attachment to the third control mechanism 34, as will be described later.

Axial movement of the control wire 78 in response to actuation of the third control mechanism 34 moves the end cap 74 either toward or away from the base member 72. This flexes the splines 76 to vary the shape of the basket 70.

The splines 76 of the mapping basket 70 shown in Fig. 12 can assume various cross sectional shapes. The details of representative constructions will be discussed next.

A. The Basket Splines

(i) Cylindrical Splines

Figs. 13 and 14 show a spline 76A having a cylindrical cross section. The spline 76A carries the sensing electrodes 22 axially spaced along its length (six electrodes 22 are shown for the sake of illustration). The proximal end of the spline 76A includes an eyelet 80 for attachment to a pin on the base member 72. The distal end of the spline carries a hook 82 for quick connection to circumferentially spaced open-

ings 84 on the end cap (as Fig. 12 shows). Of course, other quick connect coupling mechanisms can be used.

5 The cylindrical spline 76A can have an open interior passage for conducting individual signal wires connected to the sensing electrodes 22.

10 However, in the embodiment shown in Figs. 13 and 14, the body of the cylindrical spline 76A is solid. It comprises multiple individual layers or substrates, as Fig. 14 shows. Alternating layers 86 are coated with an electrically conductive material, like platinum. Intermediate layers 88 of nonconductive material, like polyimide, separate the conductive layers 86.

15 The layers 86 and 88 can be applied, for example, by ion beam assisted deposition (IBAD), or similar vapor deposition techniques. In the illustrated embodiment, each layer is about .0005 inch to .002 inch thick.

20 As Fig. 13 shows, an individual signal wire 90 is attached to each conductive layer 86. The signal wires 90 exit the proximal end of the spline 76A and are joined to a microconnector 92, the details of which will be described in greater detail later.

25 The number of conductive layers 86 equals the maximum number of electrodes 22 that the spline 76A carries. In the illustrated embodiment, each cylindrical spline 76A carries a maximum of 12 sensing electrodes, so there are 12 conductive layers 86 and 12 signal wires (Fig. 13 shows only a portion of the electrodes 22 and the signal wires for the sake of illustration).

30 In the illustrated embodiment, each sensing electrode 22 comprises a flexible substrate such as a silicone rubber body that has been coated by IBAD with platinum. Each sensing electrode is slipped into po-

35

sition over the spline 76A and there fastened by adhesive or the like. Alternatively, the rubber bodies can be molded in place over the spline and subsequently coated with a conductive layer by IBAD.

5 A wire or pin 94 made of electrical conductive material (such as platinum) is inserted through each electrode 22 and into the body of the spline 76A. Each pin 94 is coated with an insulating material, except for its head end and its tip end.

10 As Fig. 14 shows, the pins 94 have different prescribed lengths, so that their tip ends reach different conductive layers 86. Each pin 94 individually conducts the signals received by its associated sensing electrode 22 to one conductive layer 86. In this way, the signals sensed by each electrode 22 is transmitted by a different conductive layer 86 to the associated signal wire 90.

(ii) Rectilinear Splines

15 20 Fig. 15 shows an electrode support spline 76B having a general flat, rectilinear cross section.

Unlike the cylindrical spline 76A shown in Fig. 13, the rectilinear spline 76B has anisotropic stiffness. It exhibits the flexibility to deflect or bend in one plane along its longitudinal X axis 96 (in the direction of the Y axis as shown by arrows in Fig. 15). However, it exhibits stiffness to resist flexing or twisting about its longitudinal X axis 96 in the direction of the Z axis.

25 30 As Fig. 15 shows, each rectilinear spline 76B carries sensing electrodes 22 axially spaced along its longitudinal axis 96. Like the cylindrical spline 76A, the proximal end of the rectilinear spline 76B includes an eyelet 80 for attachment to the basket base member 72. The distal end of the spline 76B car-

35

ries a hook 82 for quick connection to the circumferentially spaced openings 84 on the basket end cap 74 (see Fig. 12).

When so connected, the anisotropic stiffness of each rectilinear spline 76B resists twisting about its longitudinal axis 96. This keeps the basket 70 torsionally rigid. The adjacent splines 76B are retained in the desired circumferentially spaced relationship.

Still, axial movement of the control wire 78 will flex each of the rectilinear splines 76B centrally outwardly along their longitudinal axes 96 in the direction of their Y axes. This will alter the circumferential shape of the basket 70 (as Figs. 5 to 7 show).

Due to their anisotropic stiffness, adjacent splines 76B will resist twisting. The assembled basket 70 will therefore also resist twisting and will retain a desired symmetrical three dimensional shape about its longitudinal axis.

In the embodiment shown in Fig. 15, the spline 76B comprises multiple conductive layers 98 separated by intermediate nonconductive layers 100 (as Figs. 18 and 19 best show). The conductive layers 98 are coated with an electrically conductive material, such as platinum. The conductive layers are preferably .005 to .002 inch in thickness. The nonconductive layers 100 are made of a nonconductive material, such as a polyimide or similar polymeric material.

As Figs. 18 and 19 show, an electrode wire 102 is soldered to each conductive layer 98. The individual electrode wire 102 for one conductive layer 98 is axially spaced apart from the electrode wire 102 for the next conductive layer 98. As Figs. 18 and 19 also show, the electrode wires 102 from the lower con-

ductive layers 98 pass through plated through openings 102 in successive upper conductive and nonconductive layers 98 and 100 to exit the top surface of the spline 76B (as Fig. 16 also shows). There, an electrode 22 is soldered to each electrode wire 102.

As Figs 15; 16; 18; and 19 show, the proximal ends of the various conductive and nonconductive layers 98 and 100 are preferably arranged in stepwise fashion. This exposes each conductive layer 98 to facilitate connection of the signal wires 90 by soldering.

In an alternative arrangement (as Fig. 17), the electrodes 22 are vapor deposited on the surface of the rectilinear spline 76C. In this arrangement, the surface of the spline 76C also carries a solid state printed circuit 104 formed by either ion deposition or etching. The circuit 104 conducts signals from the individual electrodes 22 to individual signal wires 90 attached at the proximal end of the spline 76C. An eyelet 80 and a hook 82 provide for quick attachment of the spline 76C between the basket base member 72 and end cap 74, as previously described.

B. The Microconnector

The multiple signal wires 90 leading from the sensing electrodes can be bundled together and passed as individual wires through the bore 64 of the flexible guide tube 62 for attachment to the controller 14. Laser welding can be used to minimize the cross sectional area of the electrical connections.

In the illustrated and preferred embodiment, the number of electrically conductive wire leads passing through lumen 64 is minimized by using solid state microconnector 92 in the base member 72 (see Fig. 12). Figs. 20 to 24 show the details of the

microconnector 92.

As Fig. 20 shows, the microconnector 92 includes one microprocessor chip 106 for each electrode support spline 76 in the basket 70. Figs. 20 to 24 assume an array of 56 sensing electrodes 22 on the basket 70. One or more of the sensing electrodes can also serve as ablation electrodes, as well.

In this array, there are eight splines 76, with each spline 76 holding seven sensing electrodes 22. In this arrangement, the microconnector 92 includes eight individual chips 106 (as Fig. 21 shows), with seven electrode signal wires 90 attached to each chip 106 (as Fig. 20 shows).

The chips 106 serve as switches controlled by the controller 14. Each chip 106 receives seven individual signals, one from each electrode 22 on the associated spline 76. Each chip 106 transmits only a selected one of the electrode signals at a time to the controller 14, subject to the switching signals that the controller 14 generates. The switching signals of the controller 14 thereby multiplex the electrode signals through the microconnector 92. This reduces the number of electrical pathways required through lumen 64.

As Fig. 20 also shows, each chip 106 includes an I/O buss 108 comprising a power (+) contact 110 and a power (-) contact 112. The power contacts 110 and 112 receive power from a supply 130 within the controller 14. The I/O buss 108 also includes an input switching (or control) contact 114, which receives the switching signals from the signal generator 132 within the controller 14 to select the input signal wire to be sampled. The control contact 114 can also receive ablation energy through the signal generator 134 from a source 135, to thereby use

one or more of the associated sensing electrodes for tissue ablation.

5 The I/O buss 108 further includes an output signal contact 116 for transmitting the selected electrode signal to the signal processor 134 within the controller 14. Figs. 23 and 24 diagrammatically show the components 130; 132; and 134 of the controller 14.

10 The power, control, and output signals of each chip 106 are transmitted to and from the buss 108 along an electrical conduction conduit 118 carried within the lumen 64 of tube 62. The electrical conduit 118 can be variously constructed. It can, for example, comprise coaxial cable.

15 In the illustrated embodiment (see Fig. 21), the conduit 118 comprises a mylar tube. The surface of the tube 118 carries a solid state printed circuit 120 formed by either ion deposition or etching.

20 The specific configuration of the circuit 120 deposited on the tubular conduit 118 can vary. In the embodiment shown in Fig. 23, the circuit 120 comprises 32 individual conducting paths that extend in a helical array deposited about the axis of the tube. As Fig. 20 also shows, the array includes one power
25 (+) line 122 and one power (-) line 124 for each chip 106 (for a total of 16 power (+) and (-) lines). These lines are connected to the power supply 130 within the controller 14.

30 The array shown in Figs. 20 and 23 also includes one input control line 126 and one signal output line 128 for each chip 106 (for 16 additional lines, comprising a total of 32 conducting lines). These lines 126 and 128 are connected, respectively, to the signal multiplexing control circuit 132 and to
35 the signal processing circuit 134 of the controller

14.

As Fig. 20 and 21 show, a stainless steel ferrule 136 electrically interconnects the lines of the circuit 120 with the microconnector 92. The ferrule is located within the distal end of the mylar tube 118. The ferrule 136 has a prescribed array of 32 cone points 138. The cone points 138 electrically interconnect the appropriate power (+) and (-) lines 122 and 124, the control input line 126, and the signal output line 128 to the associated contacts 110/112/114/116 of the I/O buss 108 of each chip 106.

In an alternative arrangement (as Figs. 22 and 24 show), the circuit 120 carried on the tube 118 is reduced to 18 lines. This circuit 120 also extends in a helical array deposited about the axis of the tube 118. This array carries only one power (+) line 122 and one power (-) line 124, connected to the power supply 130. As Fig. 24 shows, the distal ends of the power (+) line 122 and the power (-) line 124 encircle the distal end of the tube 118 in axially spaced loops.

In the particular array shown in Fig. 24, the loop of the power (+) line 122 is located closer to the distal end of the tube 118 than the loop of the power (-) line 124 (see Fig. 22, also).

The array carried by the tube 118 also includes one input control line 126 and one signal output line 128 for each chip 106, for a total of 16 additional lines. As before described, these lines 126 and 128 are connected to the multiplexing and signal analyzing circuits 132 and 134 of the controller 14 (as Fig. 24 shows). As Fig. 22 shows, the lines 126 and 128 terminate on the distal end of the tube 118 below the power (+) and power (-) loops 122 and 124 just described.

In this arrangement (as Fig. 22 shows), a portion of the I/O buss 108 of each chip 106 is arranged circumferentially. The top two contacts 110 and 112 comprise the power (+) and power (-) contacts, respectively. These are commonly connected by cone points 138 on the ferrule 136 to the power (+) and power (-) loops 122 and 124, as Fig. 22 shows.

The bottom two contacts 114 and 116 of the I/O buss 108 comprise the control input and signal out leads. These contacts 114 and 116 are circumferentially arranged below the axial power contacts 110 and 112. The cone points 138 on the ferrule 136 appropriately connect the control input line 126 and the signal output line 128 to these circumferentially arranged contacts 114 and 116 of the I/O buss 108, as Fig 22 shows.

4. The Probe Control Mechanisms

A. The Steering Control Mechanism

In the illustrated arrangement shown in Fig. 1, the first probe control mechanism 30 occupies the interior of the steering member 50. Fig. 25 shows further details of this construction.

The first mechanism 30 includes a rotating cam wheel 140 housed within the steering member 50. A lever 142 on the exterior of the steering member 50 (see Fig. 1) is attached to the interior cam wheel 140. Movement of the steering lever 142 by the user rotates the cam wheel 140.

As Fig. 25 shows, the cam wheel 140 carries a fastener 144 between its right and left side surfaces. Fastener 144 holds the proximal ends of right and left probe steering wires 146 and 148, which are soldered to the interior of the fastener 144.

The steering wires 146 and 148 extend from

the opposite ends of the fastener 144 and along the associated right and left sides of the cam wheel 140. The steering wires 146 and 148 exit the front of the steering member 50 through the interior bore of a tension screw assembly 150, passing through the telescopic shaft 54 and into the junction tube 46, as Fig. 10 shows.

The steering wires 146 and 148 extend further along within the flexible shaft bore 64. Near the distal end of the tube 62, the steering wires 146 and 148 pass outside the bore 64 through exit holes (not shown). As Fig. 12 shows, solder connects the end of the left steering wire 148 to the left side of the distal end of the flexible tube 62. Likewise, solder connects the end of the right steering wire 146 to the right side of the distal end of the flexible tube 62.

Left rotation of the cam wheel 140 pulls the left steering wire 148 to bend the distal end of the tube 62 to the left. Likewise, right rotation of the cam wheel 140 pulls the right steering wire 146 to bend the distal end of the tube 62 to the right.

In this way, the first control mechanism 30 steers the distal end of the flexible tube 62 and, with it, the attached mapping basket 70 (as Fig. 2 shows).

It should be appreciated that, instead of using an active onboard mechanism for steering the flexible tube 62, a wire can be used to guide and position the distal end of the tube 62 in the heart. Figs. 26 and 27 show this alternative, over-the-wire embodiment, which lacks an onboard steering mechanism.

In the embodiment shown in Figs. 26 and 27, the probe 10A includes an interior guide wire 152. The guide wire 152 extends from the handle (not

shown), through the bore 64 of the flexible tube 62, passing through a central guide tube 154 in the mapping basket 70.

5 In use, the physician first maneuvers the guide wire 152 through the main vein or artery into a selected heart chamber. Then, the physician passes the tube 62 of the probe 10A with the attached mapping basket 70 over the guide wire 152 into position.

10 In this embodiment (as Fig. 26 shows), the probe 10A still preferably includes a slidable sheath 68 for temporarily enclosing the mapping basket 70 while being guided over the wire 152 into position (as Figs. 3 and 4 show).

15 As Fig. 27 shows, the over-the-wire probe 10A also preferably includes a one-way annular valve 156 in the guide tube 154. The valve 156 prevents the back flow of blood and other fluids within the heart chamber into the guide tube 154 and the interior regions of the probe 10A.

20 B. The Mapping Assembly Deployment Mechanism

25 In the illustrated arrangement, the second mechanism 32 occupies the tip 42 of the probe handle 16. Fig. 11 shows further details of this construction.

30 As Fig. 11 shows, the second mechanism 32 includes a carriage 60 that moves within the center bore 58 of the handle tip. The carriage 60 includes an opening 158 concentric with the axis of the center bore 58, through which the flexible tube 62 passes. As Fig. 11 shows, the outer diameter of the flexible tube 62 is less than the inner diameter of the carriage opening 158.

35 The carriage member 60 has an exposed actuator 160 that extends through an elongated slot 162

in the handle tip (as Figs. 1 and 2 also show). The slot 162 extends along the axis of the center bore 58. Fore and aft movement of the actuator 160 by the user moves the carriage member 60 within the center bore 58 axially over the flexible tube 62.

As Fig. 11 further shows, the proximal end of the sliding sheath 68 is fastened by adhesive or the like to the carriage 60. Carriage movement as just described will thus also slide the attached sheath 68 axially over the flexible tube 62.

When the actuator 160 occupies the fully forward position in the slot 162 on the handle tip 42 (as Fig. 3 shows), the distal end of the sheath 68 is generally coterminous with the end cap 74 of the mapping basket 70. The distal end of the sheath 68 will thereby enclose the entire mapping basket 70 in a closed, collapsed condition.

When the physician subsequently moves the actuator 160 to the fully rearward position in the slot 162 on the handle tip 42 (as Fig. 4 shows), the distal end of the sheath 68 is generally coterminous with the base member 72 of the mapping basket 70. This exposes the mapping basket 70 for use. In this way, the second mechanism 32 is used to deploy and retract the mapping basket 70.

Preferably (as Fig. 26 best shows), the distal end of the flexible tube 62 includes one or more O-rings or gaskets 164. The gaskets form a fluid tight seal between the flexible tube 62 and sliding sheath 68 to prevent the back flow of blood and other fluids from within the heart toward the catheter handle 16.

C. The Mapping Assembly Shaping Mechanism

In the illustrated arrangement, the third

mechanism 34 occupies the base 40 of the handle. The proximal end of the control wire 78 of the mapping basket 70 passes through the telescopic shaft for attachment within the steering member 50 (see Fig. 25). The distal end of the control wire 78 is attached to the basket end cap 74 (as Fig. 12 shows).

Fore and aft movement of the steering member 50 along the track 52 thereby axial advances the control wire 78 to move the end cap 74 toward and away from the base member 72. This, in turn, expands, collapses, and shapes the mapping basket 70.

When the steering member 50 occupies the forwardmost position in the track 52 (as Fig. 7 shows), the end cap 74 is spaced farthest away from the base member 74. The flexible electrode support splines 78 lie in a generally linear relationship between the base member 72 and the end cap 74. The mapping basket 70 is in its closed or folded position, as Fig. 7 shows.

When in this position, movement of the sheath control actuator 160 to the forwardmost position in the tip slot 162 will serve to enclose the collapsed mapping basket 70 completely within the sheath 68. The collapsed mapping basket 70 is thereby also retracted (as Fig. 3 shows).

Likewise, movement of the sheath control actuator 160 to its rearwardmost position in the tip slot 162 will move the sheath 68 away from the collapsed mapping basket 70. The mapping basket 70 is thereby deployed (as Fig. 4 shows).

When deployed, movement of the steering member 50 toward the rearwardmost position in the track 52 will move the end cap 74 progressively closer to the base member 72 (as Figs. 5 and 6 show). The resilient electrode support splines 78 progressively

flex to assume a progressively more bowed three dimensional shape. The shape of the mapping basket 70 depends upon the position of the steering member 50 within the track 52.

5 As the steering member 50 moves from the forwardmost position toward the center position of the track 52 (as Fig. 5 shows), the mapping basket 70 will progressively change from an elongated, oval shape into a spherical shape. As the steering member 50
10 moves further from the center position toward the rearwardmost position of the track 52, the mapping basket 70 will progressively change from a spherical shape into a donut or toroidal shape.

15 The third control mechanism 34 preferably includes an external locking nut 166. Clockwise rotation of the locking nut 166 increases the seating force between the steering member 50 and the handle base 40. When moved fully clockwise, the locking nut 166 imposes a seating force that prevents movement of
20 the steering member 50 within the track 52. In this way, the user can lock the mapping basket 70 in the desired shape, while conducting other control or mapping operations.

25 Counterclockwise rotation of the locking nut 166 decreases the seating force and frees the steering member 50 for movement within the track 52. In this way, the user can manipulate the third mechanism 34 to open, close, and shape the mapping basket 70.

30 D. The Mapping Assembly 20 Twisting Mechanism

 In the illustrated arrangement, the fourth mechanism 36 comprises the rotating junction between the handle base 40 and the handle tip 42. As Fig. 8 shows, by holding the handle tip 42 stationary, the
35 user can rotate the main body 38 of the handle 16

relative to the tip 42. This, in turn, rotates the flexible tube 62, which is attached to the junction tube 46 within the main handle body 38, as Fig. 10 shows. This rotates the mapping basket 70, which is attached to the flexible tube 62, without rotating the sheath (which is separately attached to the carriage 60 within the handle tip 42, as Fig. 11 shows. In this way, the fourth control mechanism 36 rotates the mapping basket 70 without rotating the external sheath 68.

4. Deployable Preshaped Electrode Support Structures

A. Deployable Preshaped Basket Assemblies

It should be appreciated that the mapping assembly 20 just described need not include a control mechanism for altering the basket's shape 70. The basket 70A can be preformed to collapse in response to an external force and to assume a single, prescribed final configuration upon the removal of the external force.

In this arrangement the basket splines 78 are connected between the base member 72 and the end cap 74 in a resilient, pretensed condition. The resilient splines 78 collapse into closed, a compact bundle in response to an external compression force.

In this embodiment, the second control mechanism 32 applies the force to compress the basket 70. Movement of the tip actuator 160 to the forwardmost slot position advances the sheath 68 to compress and collapse the basket 70 while enclosing it. Movement of the tip actuator 160 to rearwardmost slot position advances the sheath 68 away from the basket 70. This removes the compression force, and the freed splines open to assume a prescribed shape. In one preferred

arrangement, at least some of the individual splines 78 within the basket 70 include varying regions of stiffness along their length. The varying regions of stiffness deflect differently when commonly stressed. Thus, the spline, when bent, will not assume a uniform arc. Instead, the spline will bend in a nonuniform way, taking on a different shape. By locating splines having regions of varying stiffness in different regions of the array, a multitude of different prescribed shapes for the basket 70 can be obtained.

In another preferred embodiment, at least some of the splines include preshaped memory wire like Nitinol. The memory wire assumes different shapes, depending upon the temperature conditions surrounding it.

In this embodiment, when exposed to room temperature conditions outside the body, the memory wire splines assume a generally straight configuration. In this way, the splines can be collapsed into a compact shape for enclosure within the sheath 68 for placement within a heart chamber. When deployed outside the sheath 68 and exposed to internal body temperatures within the heart chamber, the memory wire splines change their generally straight configuration and assume another predetermined shape.

These different arrays can be attached to the distal end of individual, specialized catheters and be deployed with a handle-mounted control mechanism as previously described.

B. The Deployable Bladder Mapping Assembly

Figs. 28 and 29 show an alternative mapping assembly 168 in which the support for the sensing electrodes takes the form of an inflatable bladder 170. The inflatable bladder 170 occupies the interior

chamber 174 of a base member 172, which the guide tube 62 carries at its distal end. The distal end of the base member 172 is open. As Fig. 28 shows, the bag 170 is normally stored at the distal end of the catheter or within the interior chamber 174 in a deflated, retracted condition.

A fluid pressure conduit 176 communicates with the bag 170. The conduit extends from the interior chamber 174 through the bore 64 of the flexible tube 62 to a port near the probe handle 16 (not shown in Figs. 28 and 29). In use, the physician connects the port to a source of fluid pressure, such as pressurized carbon dioxide or liquid saline solution.

After maneuvering the distal catheter end to the desired endocardial location, the physician conducts positive fluid pressure through the supply conduit 176 into the bag 170. The positive fluid pressure causes the bag 170 to expand or inflate.

The inflating bag 170 deploys outwardly beyond the open chamber end, assuming a prescribed three dimension shape (as Fig. 29 shows). The shape can vary, depending upon the configuration of the bag. In the illustrated embodiment, the bag 170 assumes a somewhat spherical shape when inflated. Due to its pliant nature, the bag 170, when inflated, naturally conforms to the topography of the endocardial surface that is being mapped.

Release of the positive fluid pressure and the application of negative pressure through the supply conduit 176 will drain fluid from the bag 170. The bag 170 collapses back into the base chamber 174 in a deflated condition (as Fig. 28 shows). Since the bag 170 deploys itself as it inflates, there is no need for a separate control mechanism to deploy the

bag.

Alternatively, a movable sheath 68 controlled by the second mechanism 32 (as earlier described) can be used to selectively enclose the bag 170 before use and to free the bag 170 for use.

The bag includes an electrically conducting surface, such as platinum. The surface is applied, for example, using IBAD. The conductive surface can occupy the entire exposed area of the bag 170. In this case, the bag, when inflated, functions as a single sensing electrode 170.

Alternatively, the conductive surfaces can be applied in spaced zones 178 upon the circumference of the bag 170 (as Fig. 29 shows). In this case, each zone 178 acts as an individual sensing electrode. The spaced conductive zones on the bag 170, when inflated, thereby together constitute an array of sensing electrodes. The bag surface also carries a solid state circuit applied by vapor deposition or similar technique. The circuit attached to signal wires 180 to conduct signals from the conductive zones to a microconnector 92 in the base 172. These signals are in turn transmitted along the length of the associated catheter in the manner already described.

C. Deployable Sail Mapping Assembly

Figs. 30A and 30B show another alternative mapping assembly 182. In this embodiment, the support for the sensing electrodes takes the form of a resilient body 184 that resembles a sail. The sail body 184 is preferable made of a resilient rubber or elastomeric material.

The assembly 182 includes a base member 186 with an interior chamber 188 having an open distal end. The guide tube 62 carries the base member 186 at

its distal end.

5 A control wire or shaft 190 is attached to the backside of the sail body 184. The control wire 190 is movable along the axis of the guide tube 62 in response to a handle mounted control mechanism, like the control wire 78 associated with the variable size mapping basket shown in Fig. 12. In the illustrated embodiment, the handle mounted control mechanism can affect the same fore and aft movement of the steering member 50 upon the handle base 40, as previously described.

10 In this arrangement, when the steering member 50 occupies the rearwardmost position in the track 52, the sail body 184 is drawn back within the base chamber 188 (as Fig. 30B shows). In this condition, the sides of the resilient sail body 184 fold forwardly upon the side walls of the chamber 188, and the sail body 184 assumes a folded, concave shape within the confines of the base chamber 188. The mapping assembly 182 is retracted in this condition.

15 Subsequent movement of the steering member 30 toward the forwardmost position in the track 52 urges the sail body 184 out of the chamber 188. Freed from the confines of the chamber 188, the sides of the sail body 184 resiliently spring into an open, convex shape, as Fig. 30A shows. The mapping assembly 20 is deployed in this condition.

20 Movement of the steering member 50 back toward the rearwardmost position in the track 52 urges the sail body 184 back into the confines of the base chamber 188. In the process, the resilient sides of the sail body 184 will again fold forwardly against the side walls of the chamber 188.

25 The sail body carries one or more sensing electrodes 192. The electrodes 192 can be physically

attached to the sail body 184. Alternatively, the electrodes can be applied, for example, using IBAD.

5 The sail electrode array 182 is ideally suited for endocardial mapping. Like the previously described bag array 168 (shown in Figs. 28 and 29), the deformable, elastic sail body 184 will readily conform to the topography of the endocardial surface that it is pressed against for mapping.

10 A hard wire or solid state circuit on the sail body 184 attaches to signal wires 194 to conduct signals from the electrodes 194 to a microconnector 92 in the base 186. These signals are in turn transmitted along the length of the catheter in the manner already described.

15 D. Deployable Radial Bundle Mapping Assembly

20 Figs. 31A; 31B; and 31C show yet another alternative mapping assembly 196. In this embodiment, the support for the sensing electrodes includes a center spine 198 from which an array of flexible support filaments radiate. Each support filament carries a sensing electrode 202.

25 As before, the assembly includes a base 204 with an interior chamber 206 having an open distal end. As before, the guide tube 62 carries the base 204 at its distal end.

30 The center spine 198 is movable along the axis of the guide tube 62 in response to the operation of a handle mounted control mechanism. In the illustrated embodiment, fore and aft movement of the steering member 50, as previously generally described, can serve this control function.

35 In this arrangement, when the steering member 50 occupies the rearwardmost position in the track 52, the mapping assembly 200 is retracted and the fil-

ament array 196 is drawn back within the base chamber 206, as Fig. 31A shows. In this condition, each filament 200 is folded against the side walls of the chamber 206.

5 Subsequent movement of the steering member 50 toward the forwardmost position in the track 52 urges the central spine 198 out of the chamber 206. Freed from the confines of the chamber 206, the support filaments 200 spring into an open, three dimensional array radially surrounding the center spine 10 198, as Fig. 31B shows. The mapping assembly 20 is thus deployed.

15 Movement of the steering member 50 back toward the rearwardmost position in the track 52 urges the center spine 198 back into the confines of the base chamber 206. In the process, the flexible filaments 200 fold forwardly against the side walls of the chamber 206, as Fig. 31C shows.

20 The radial bundle of filaments 200, each carrying a sensing electrode 202, offers a high density, random mapping array 196. The flexible nature of the random array 196 readily conforms to the topography of the endocardial surface that it is pressed against.

25 A hard wire or solid state circuit on the filaments 200 and center spine 198 conducts signals from the individual electrodes 202 to a microconnector 92 in the base 204. These signals are in turn transmitted along the length of the catheter in the 30 manner already described.

E. Deployable Foam Tip Mapping Assembly

35 Figs. 32A and 32B show still another alternative mapping assembly 208. In this embodiment, the support for the sensing electrodes takes the form of

a porous foam body 210.

As before, the assembly 208 includes a base 212 with an interior chamber 214 having an open distal end. As before, the guide tube 62 carries the base 212 at its distal end.

Like the foregoing alternative embodiments, the foam body 210 is deployed from within the interior chamber 214. The foam body 210 is molded to assume what can be called a normal shape. In the illustrated embodiment (as Fig. 32A shows), the normal uncompressed shape is generally spherical. However, the original uncompressed shape can be rectangular, square, oval, toroid, or virtually any other shape.

Due to its porous, open structure, the body 210 can be collapsed, without damage, by an external compression force into another more compact shape. In the illustrated embodiment (as Fig. 32B shows), the more compact shape is generally cylindrical, to fit within the confines of the base chamber 214. However, other compact shapes can be used. When the external compression force is released, the porous foam body resilient returns to its normal shape.

A control wire or shaft 216 is attached to the foam body 210. The control wire 216 is movable along the axis of the guide tube 62 in response to the operation of a handle mounted control mechanism. In the illustrated embodiment, fore and aft movement of the probe steering member 50 can control the wire.

In this arrangement, when the steering member 50 occupies the rearwardmost position in the track 52, the foam body 210 is drawn back within the base chamber 214, as Fig. 32B shows. The side walls of the base chamber 214 compress and collapse the foam body 210. When so compressed, the foam body 210 conforms to the interior shape of base chamber 214. The map-

ping assembly 208 is retracted.

Subsequent movement of the steering member 50 toward the forwardmost position in the track 52 urges the foam body 210 out of the chamber 214, as Fig. 32A shows. When freed from the confines of the chamber 214, the foam body 210 opens into its normal uncompressed shape. The mapping assembly 208 is deployed.

Movement of the steering member 50 back toward the rearwardmost position in the track 52 urges the foam body 210 back into the confines of the base chamber 214. The foam body 210 is again compressed into a compact, retracted shape, as Fig. 32B shows.

The foam body 210 carries one or more sensing electrodes 218. The electrodes 218 can be physically attached to the foam body 210. Alternatively, the electrodes 218 can be applied, for example, using IBAD. The sensing electrodes 218 constitute a high density array ideally suited for endocardial mapping.

A hard wire or solid state circuit on the foam body 210 conducts signals from the electrode zones 218 to a microconnector 92 in the base 212. These signals are in turn transmitted along the length of the catheter in the manner already described.

5. Dynamic Mapping Assemblies

Figs. 33 to 36 show a mapping assembly 220 that dynamically alters its shape to compensate for the compression of the heart chamber in which it is located.

The mapping assembly 220 includes a base member 222 that is attached to the distal end of the guide tube 62, as previously described (see Fig. 34). The mapping assembly 220 includes an array of resil-

ient electrode supports 224. Their proximal ends are attached to the base 222, and their distal ends are attached to a end cap 226.

As described, this mapping assembly 220 is identical to the mapping assembly 20 shown in Fig. 12. As in Fig. 12, the mapping assembly 220 can include a movable sheath 68 and an associated control mechanism 32 for alternatively enclosing and deploying the assembly 220.

During endocardial mapping, the heart muscles continuously expand and contract with the beating of the heart. When deployed, the mapping assembly 220 will thereby be subject to alternate cycles of contraction and expansion. The surface pressure of the sensing electrodes 228 against the moving endocardium can therefore continuously vary, complicating the task of accurately recording the potentials. The sensing electrodes can also slip along the constantly moving endocardial surface.

To counteract this phenomenon, the mapping assembly 220 includes means 230 for continuously urging the sensing electrodes 228 against the endocardium and for maintaining a constant surface pressure, despite contraction and expansion of the heart.

The means 230 can vary. In the illustrated embodiment, the base member 222 includes a tubular body that carries a front movable mount 232 and a fixed rear mount 234 (best shown in Figs. 33 and 35). The interior side wall 236 of the base member 222 serves as a bearing surface for the movable mount 232. The movable mount 232 carries the proximal ends of the electrode supports 224.

A spring 238 connects the front mount 232 to the rear mount 234. The front mount 232 moves toward the rear mount 234 when the electrode supports 224 ex-

perience compression within the heart chamber (as Figs. 33 and 34 show). The reverse is true when the electrode supports 224 experience contraction within the heart chamber (as Figs. 35 and 36 show).

5 Movement of the front mount 232 toward the rear mount 234 compresses the spring 238. When compressed, the spring 238 urges the front mount 232 toward a distal position within the base 22, in which the spring 238 is not compressed.

10 The mounts 232/234 and spring 238 thereby establish an dynamic junction between the electrode supports 224 and the endocardium. Contraction of the heart chamber surrounding the mapping assembly 220 exerts a compression force on the electrode supports 224. The front mount 232 moves toward the rear mount 224 in response to this compression. The spring 238 serves to dampen and resist this movement, holding the electrodes against the endocardium.

15 When the heart chamber expands, the spring 238 urges the front mount 232 forward, urging the electrode supports 224 back toward their original shape.

20 The spring thereby maintains contact between the electrode supports 224 and the surrounding, moving endocardium.

25 In the illustrated and preferred embodiment, the spring 238 has a fixed spring constant that does not vary with compression. In other words, the spring 238 is a constant force spring.

30 The constant force spring 238 can take various forms. In the illustrated embodiment (as Figs. 33 and 35 best show), the spring 238 is a conical spring. When compressed, it exerts a constant force, regardless of the degree of compression.

35 The constant force 238 spring establishes

and maintains a constant surface pressure between the mapping assembly 220 and the surrounding endocardium. The dynamic junction established produces consistently accurate readings during periods of contraction and expansion of the surrounding heart muscle.

It should be appreciated that the dynamic junction can be used in association with mapping assemblies of various sizes and shapes. It is not limited in use with the particular basket mapping assembly 220 shown in Figs. 33 to 36.

6. Mapping Site Flushing and Coagulation Control

According to another aspect of the invention, the mapping assembly can include means for conveying fluid to the mapping site.

The fluid can be, for example, saline and be used to flush the mapping site to keep the sensing electrodes free of tissue buildup and blood. The fluid can also be heparin or another anticoagulant and be used to actively reduce the incidence of coagulation during the mapping procedure.

The fluid conveying means can vary. In the embodiment shown in Fig. 12, the mapping assembly 20 includes a flexible central tube 240 surrounding the control wire 78. The tube 240 extends from the end cap 74, through the base member 72 and bore of the flexible tube 62 to a fluid port 242 (like that shown in Fig. 26). Fluid to be conveyed to the site is introduced under pressure through the port 242.

The end cap 74 includes a center channel 244 communicating with the distal end of the tube 240. Fluid conveyed by the tube 240 exits through the channel 244 into the mapping site.

Preferably, the center channel includes a one-way annular valve 246, like that shown in Fig. 27. The valve 246 allows fluid to pass from the tube 240

through the channel 244, but prevents the back flow of fluid in the reverse direction. The valve 246 thereby blocks blood and other fluids present within the heart chamber from entering the tube and the interior regions of the catheter.

5

Various features of the invention are set forth in the following claims.

2000-03-04 09:00

What is claimed is:

1. An electrode assembly for use in an intraventricular multi-electrode cardiac mapping probe comprising:

5 at least one elongated spline carrying a plurality of spaced apart electrodes thereon, means for attaching said spline to the distal end of a catheter, said spline comprising a plurality of alternating electrically conductive layers and electrically non-conductive layers, an electrical conductor connecting each of said electrodes to a different one of said conductive layers, and a plurality of electrical conductors for connecting each of said layers to an electrical signal processing device.

10 2. A device according to claim 1 wherein each of said alternating conducting and non-conducting layers is configured in the shape of a concentric ring, and said spline is of a circular cross-section.

3. A device according to claim 2 wherein said electrodes are connected to said conducting layers by means of radially depending conductive pins each connecting an electrode at the surface of said spline with a conductive layer formed in the interior thereof.

5 4. An assembly according to claim 1 wherein said spline has a rectangular cross-section, said electrodes being spaced along the top surface thereof, each spline being of a substantially greater width than thickness whereby said spline can be flexed in one vertical plane that passes through its longitudinal axis but resists twisting and resists flexing in all other planes passing through said axis.

5 5. A device according to claim 4 wherein each of said electrodes is connected to one of said conducting layers by means of a conductive pin, each

5 of the conductive pins and said assembly being of a different length.

6. A device according to claim 5 wherein each of said pins is electrically insulated except at each of its ends.

5 7. A device according to claim 1 wherein the distal end of said spline is provided with means for quick connection of the same to end cap member, said end cap being adapted to be connected to the ends of a plurality of said splines which form a mapping array.

8. An electrode assembly for use in an intraventricular multi-electrode cardiac mapping probe comprising:

at least one elongated rectangularly cross sectioned spline carrying a plurality of spaced apart electrodes on the upper surface thereof, means for attaching the proximal end of said spline to the distal end of a catheter, means for attaching the distal end of said spline to an end cap, the body of said spline comprising a plurality of alternating electrically conductive layers and electrically non-conductive layers, said conductive layers having a thickness of about 0.0005 to 0.002 inch, said spline being of a substantially greater width than thickness whereby said spline can be flexed in one vertical plane passing through its longitudinal axis but will resist flexing in any other plane passing through said axis,

an electrically conductive pin connected to each of said electrodes, the pin connected to each electrode being of a different length than that connected to each of the other electrodes, each of said pins extending into the body of the spline and being attached to one of said conductive layers, each of said pins being electrically insulated except at each

of its ends, and

a plurality of electrical conductors for connecting said layers to an electrical signal processing device.

9. An electrode assembly for use in an intraventricular multi-electrode cardiac mapping probe comprising:

at least one elongated spline of a circular cross-section carrying a plurality of spaced apart electrodes on the exterior surface thereof, means for attaching the proximal end of said spline to the distal end of a catheter, means for attaching the distal end of said spline to an end cap, said spline comprising a plurality of concentric alternating electrically conductive layers and electrically non-conductive layers, said conductive layers having a thickness of about 0.0005 to 0.002 inch,

an electrically conductive pin connected to each of said electrodes, the pin connected to each electrode being of a different length than that connected to each of the other electrodes, each of said pins extending into the body of the spline and being attached to one of said conductive layers, each of said pins being electrically insulated except at each of its ends, and


a plurality of electrical conductors for connecting each of said layers to an electrical signal processing device.

10. A device according to claim 9 wherein said electrodes are ring electrodes that encircle said spline.

ABSTRACT

An electrode assembly for use in interven-
tricular cardiac mapping includes one or more elongat-
ed splines each of which carries a plurality of spaced
apart electrodes thereon. The body of each spline is
formed of a plurality of alternating electrically con-
ductive layers and the electrically non-conductive
layers. A separate electrically conductive pathway is
provided to connect each of the electrodes to a dif-
ferent one of the conductive layers. Each of the lay-
ers is electrically connected to an electrical signal
processing device so that signals provided by each of
the electrodes can be processed.

2025 RELEASE UNDER E.O. 14176

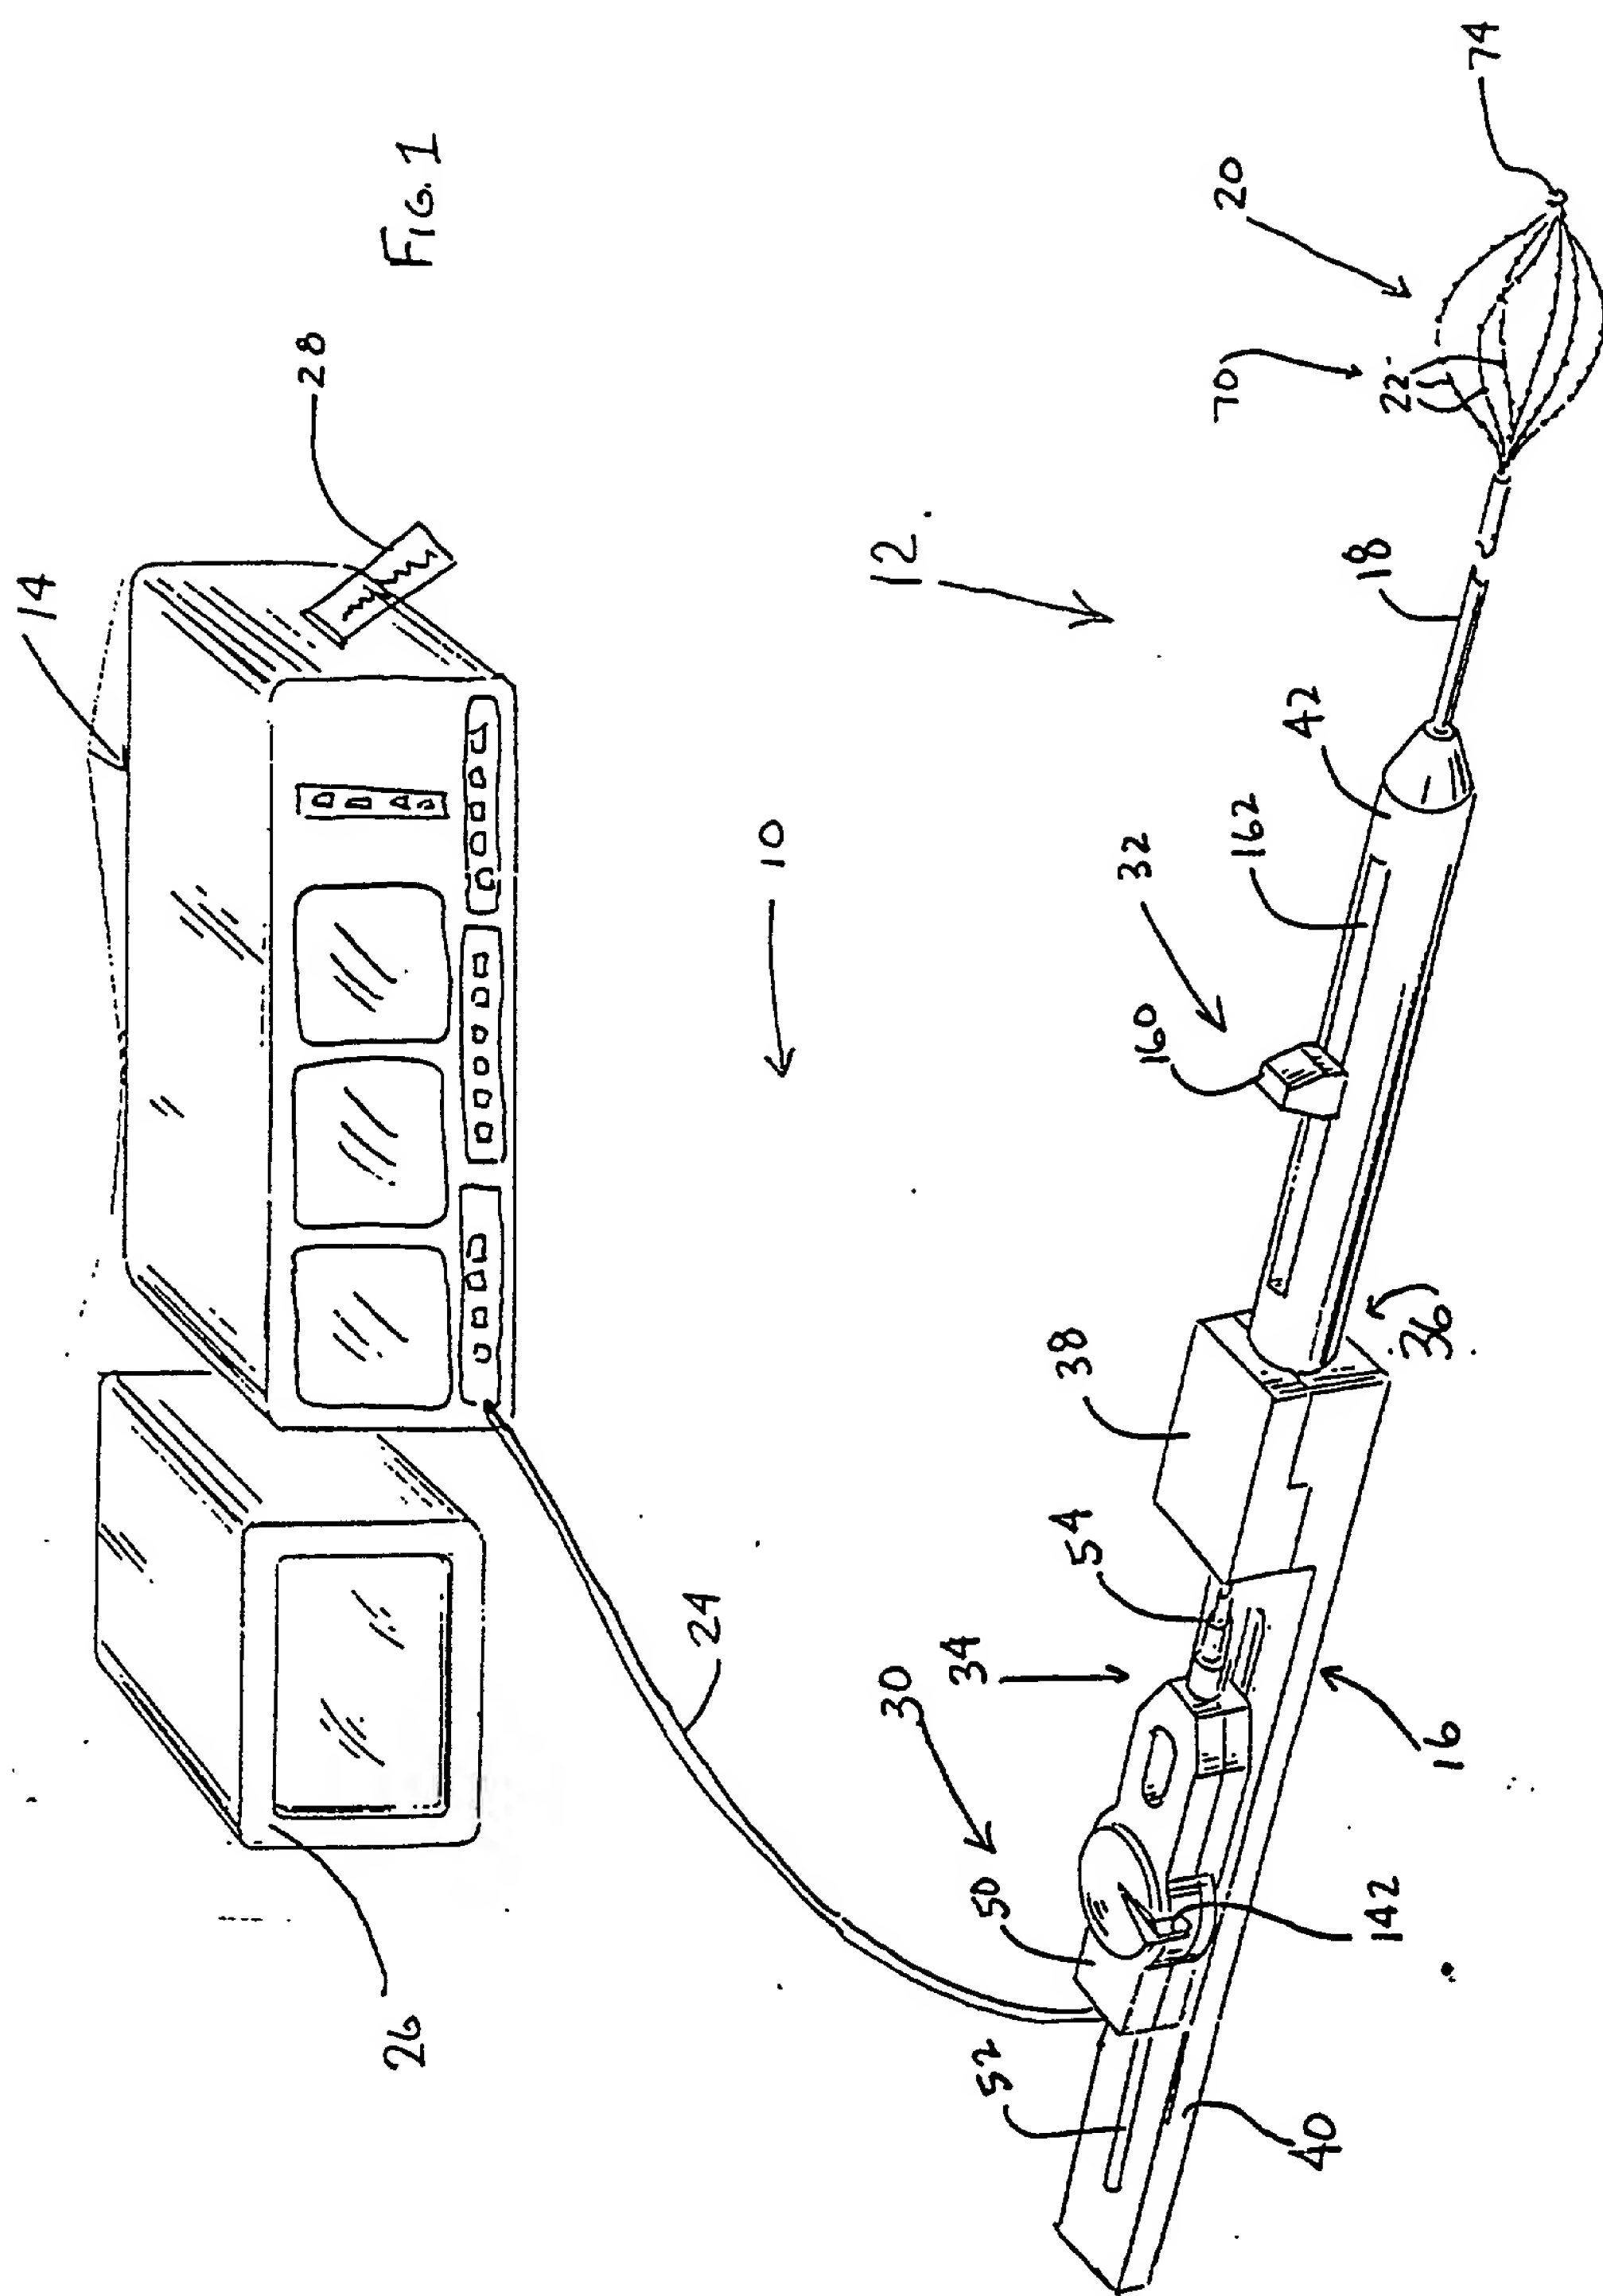

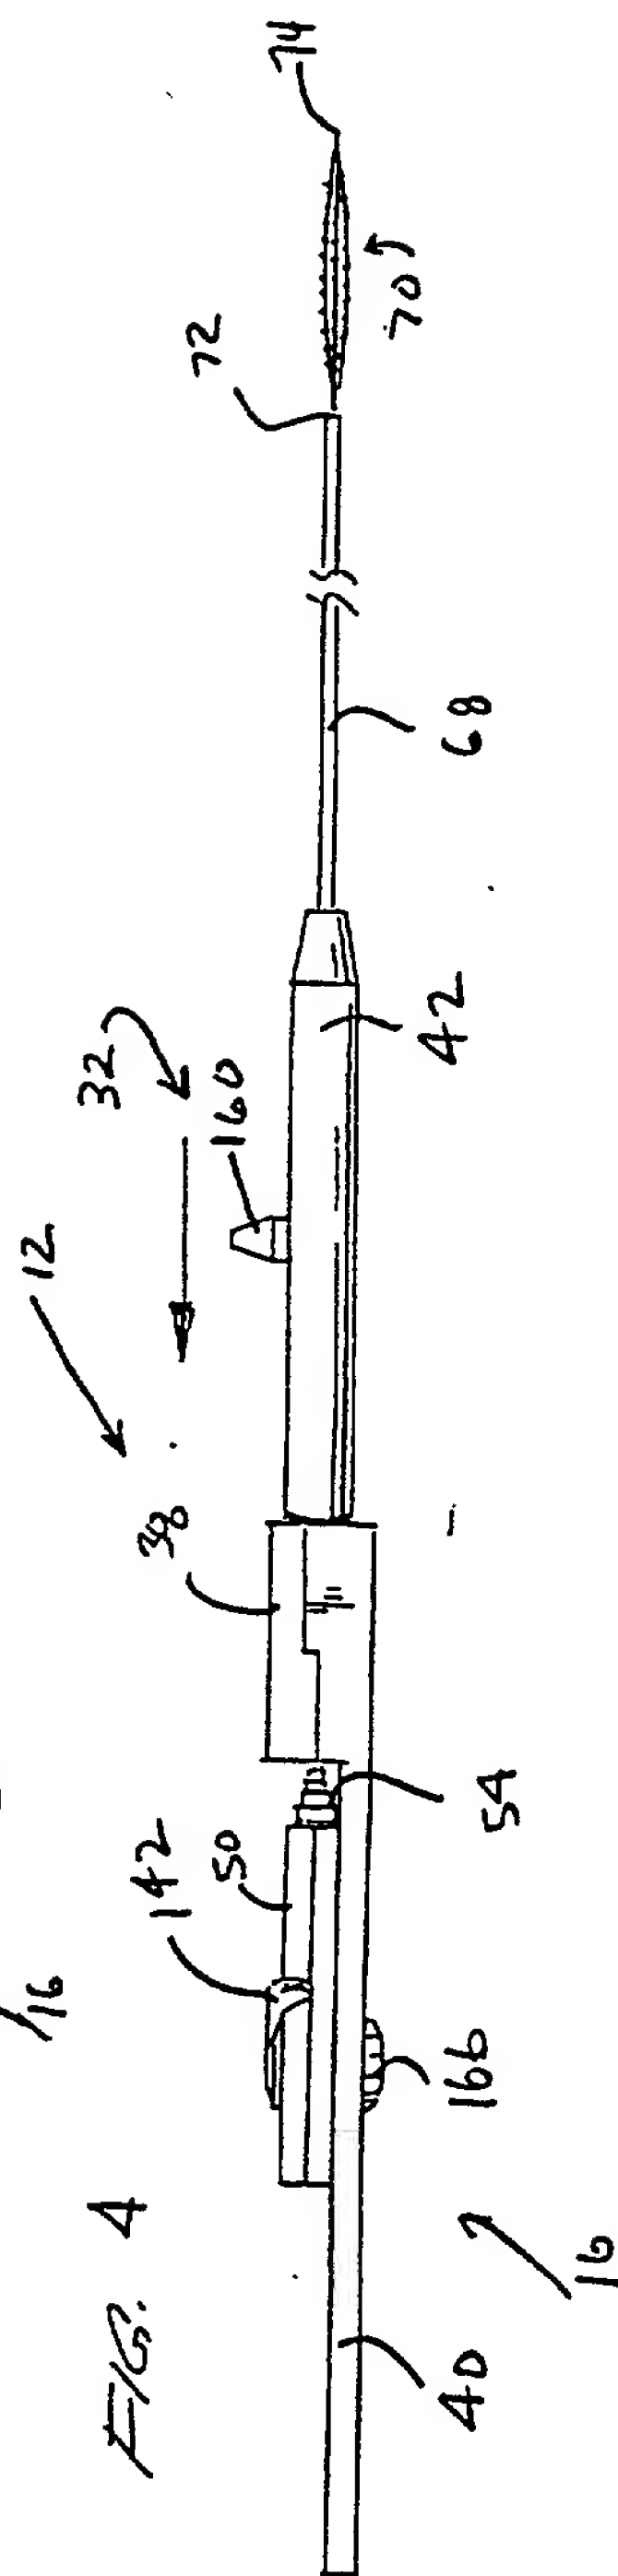
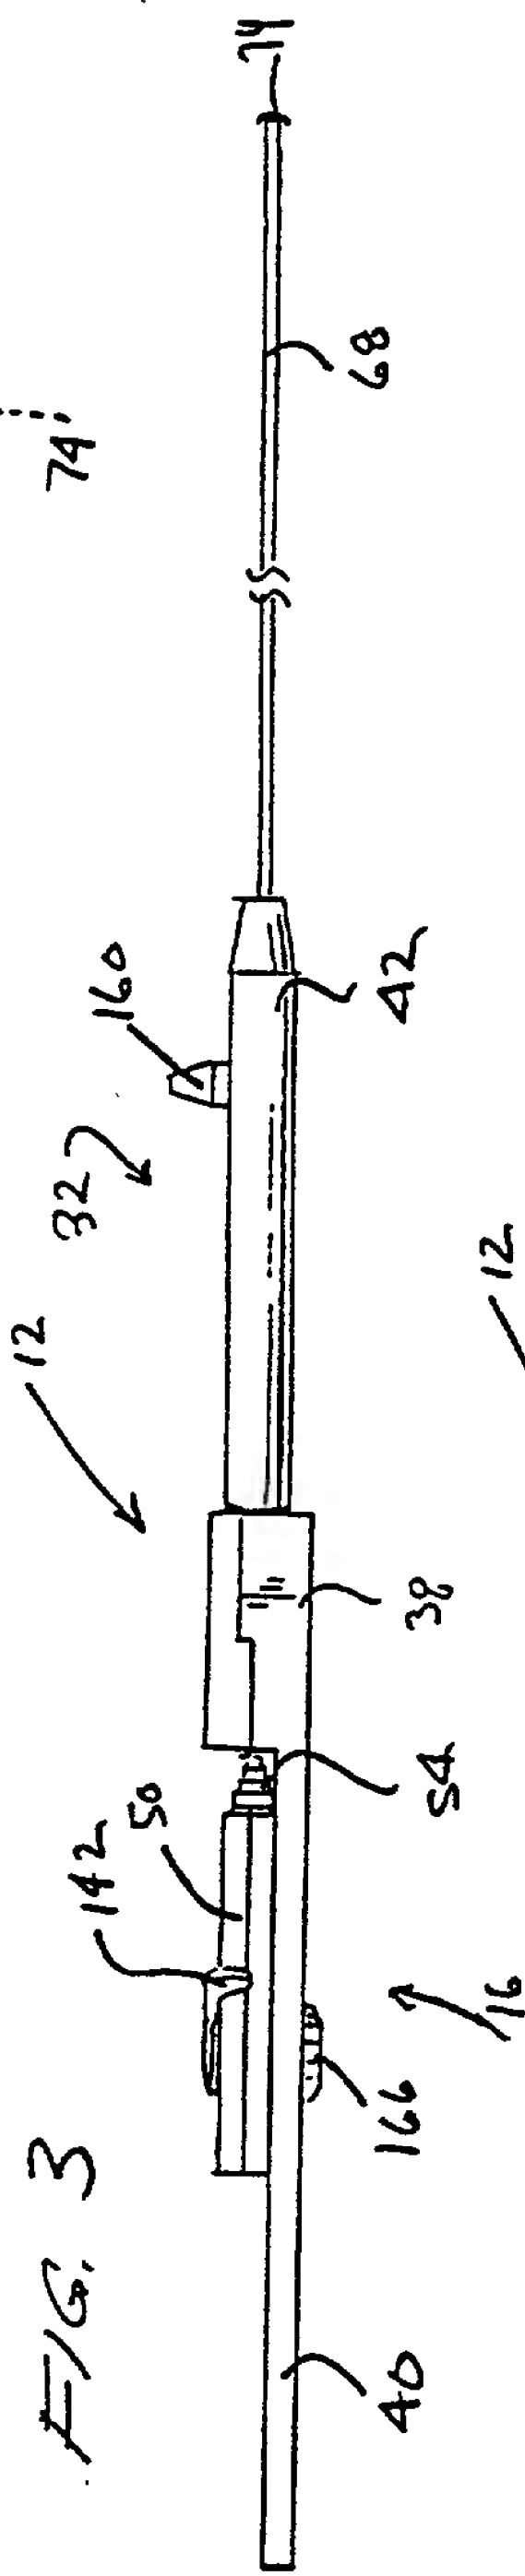
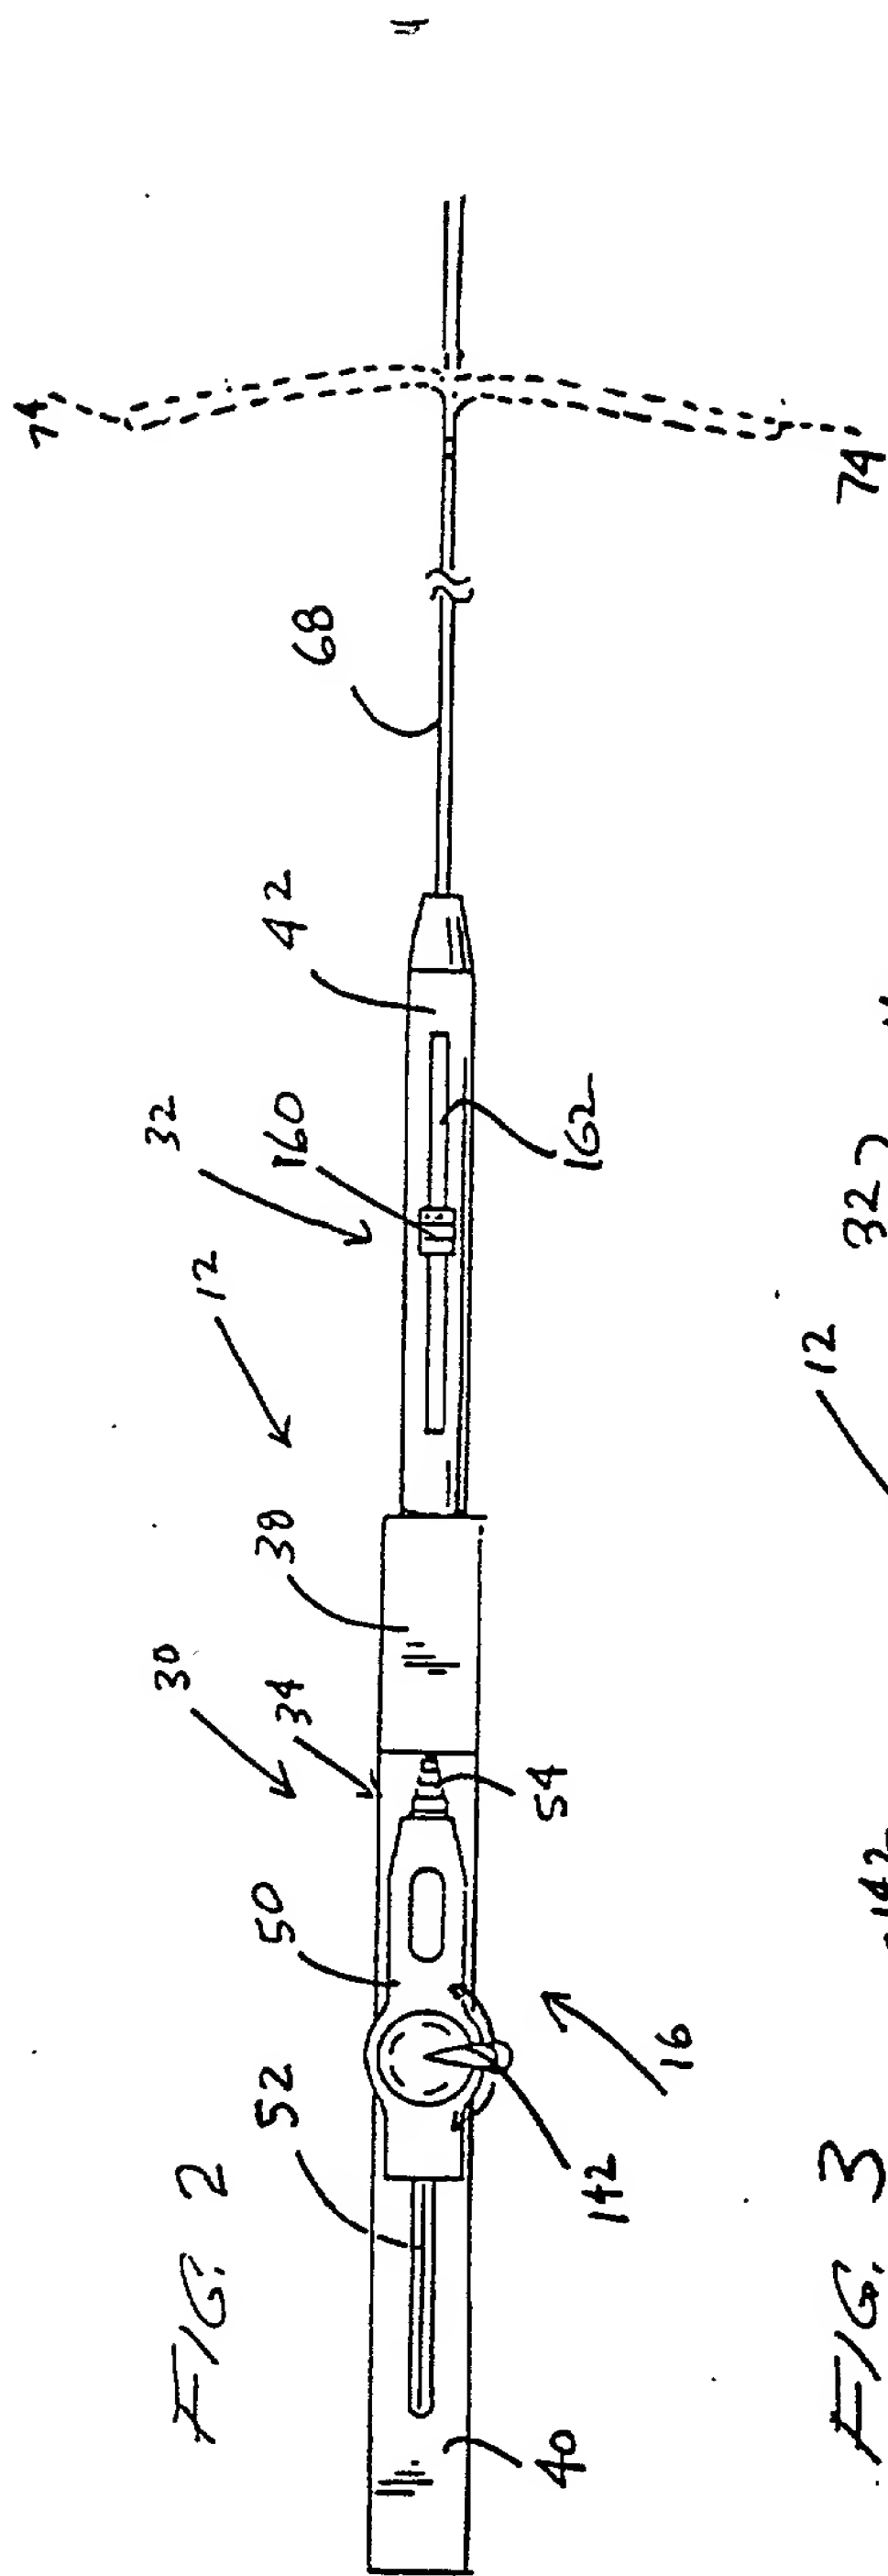


FIG. 5

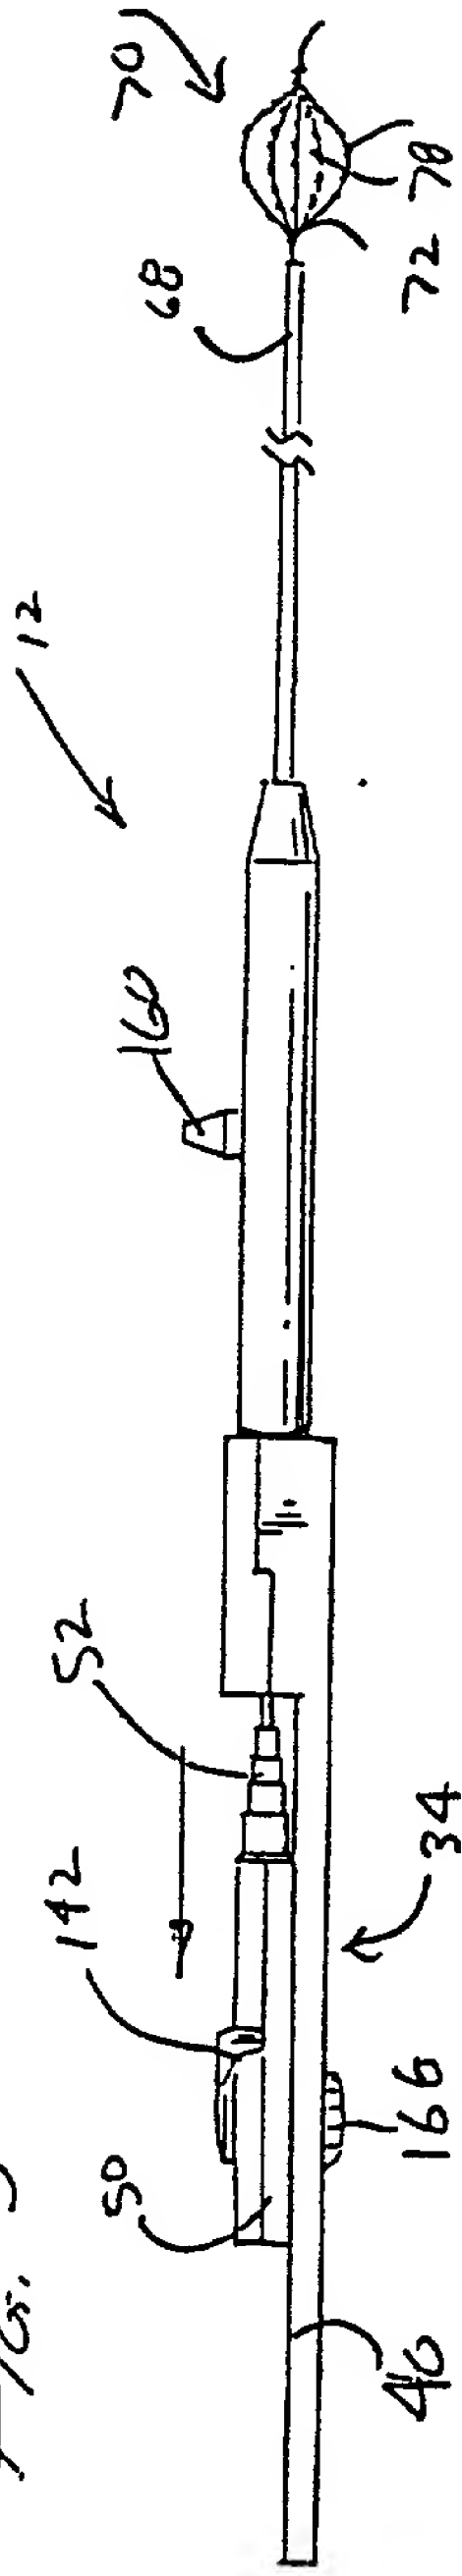


FIG. 6






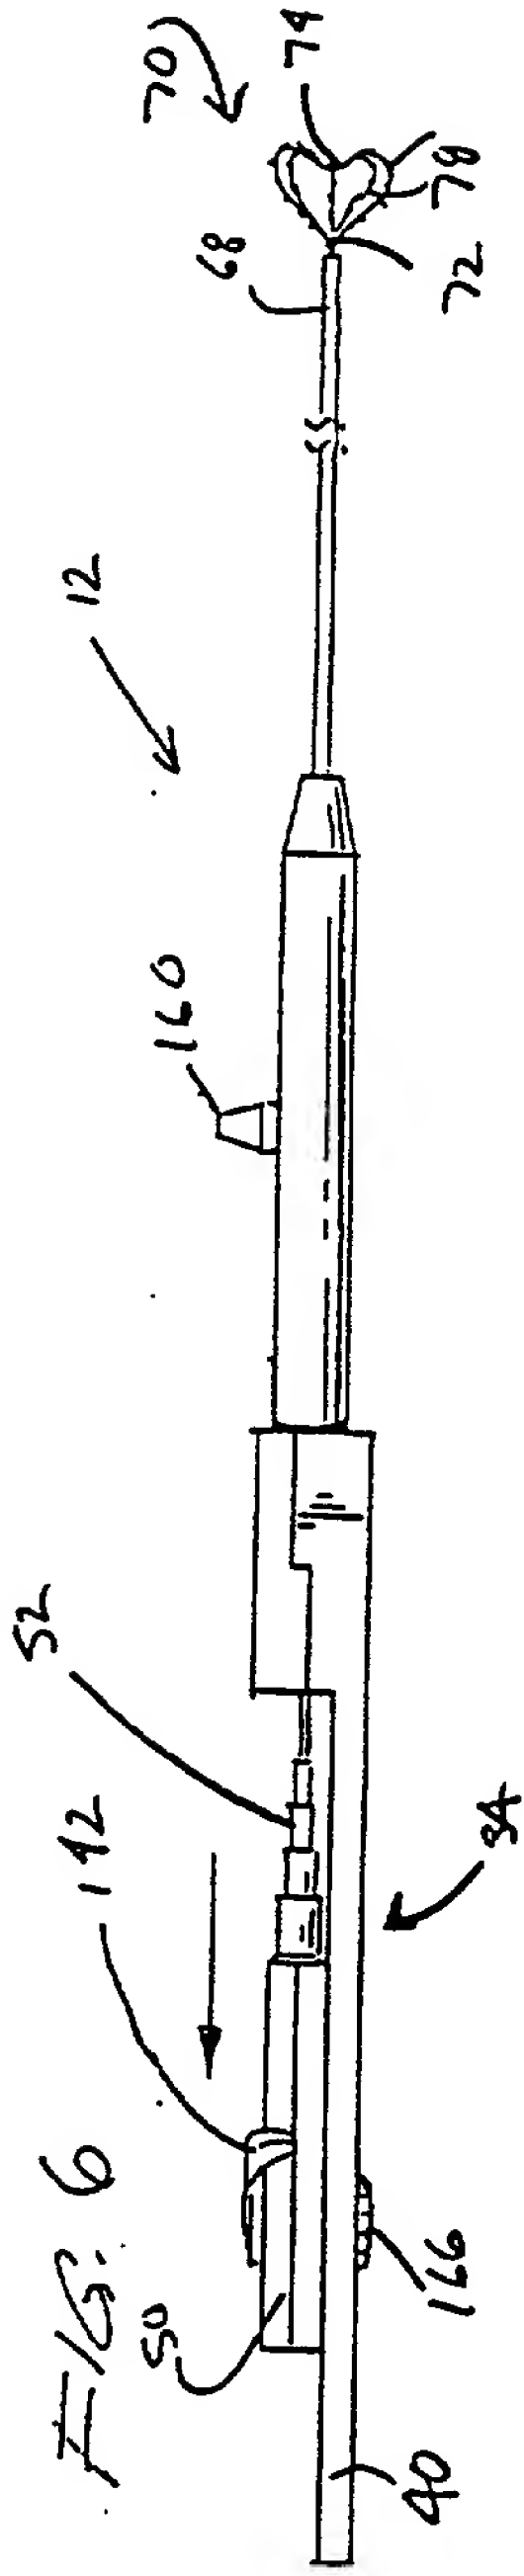


FIG. 7

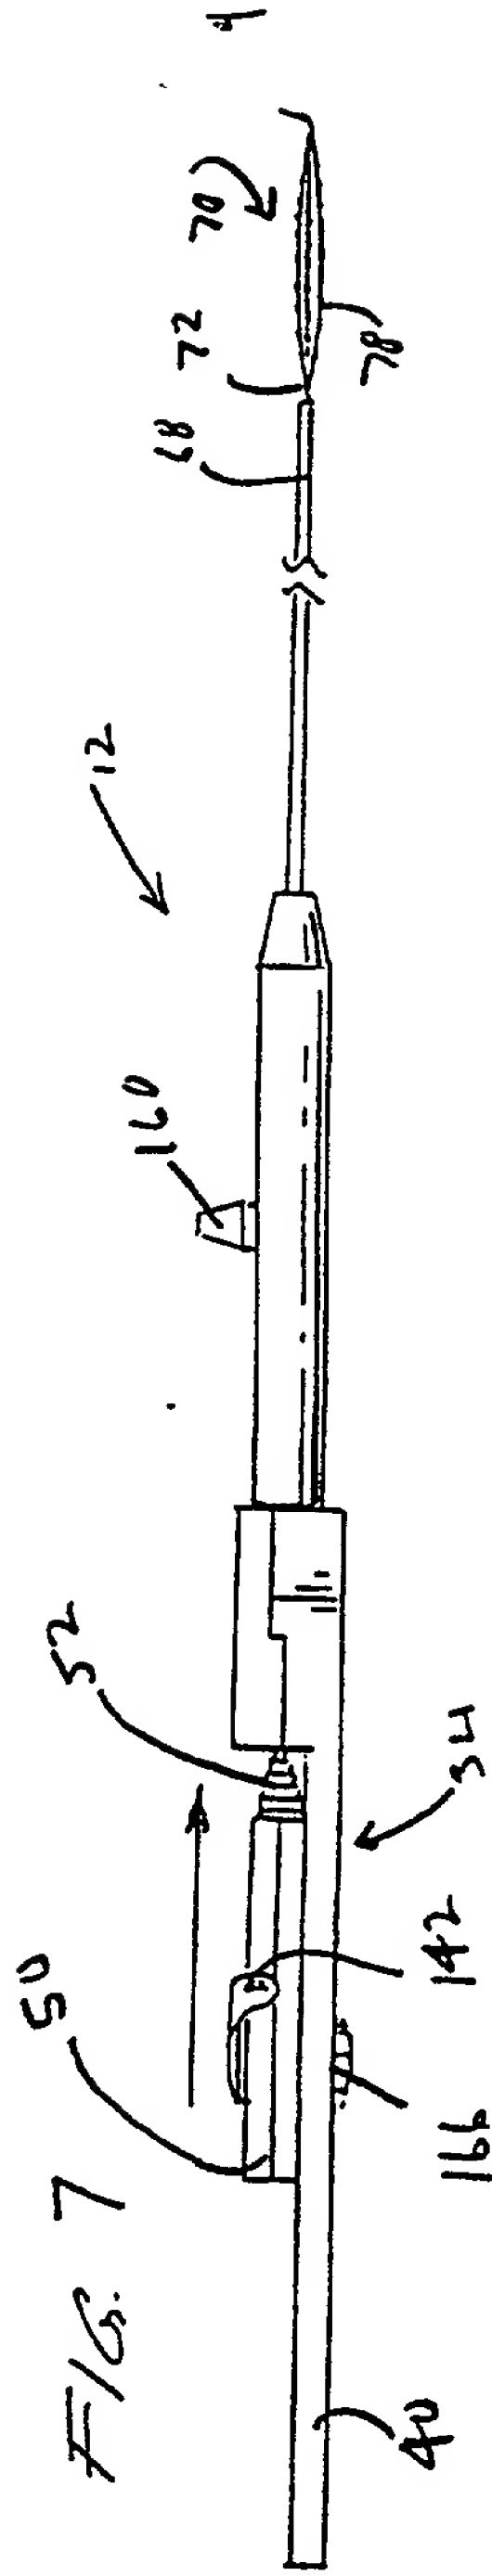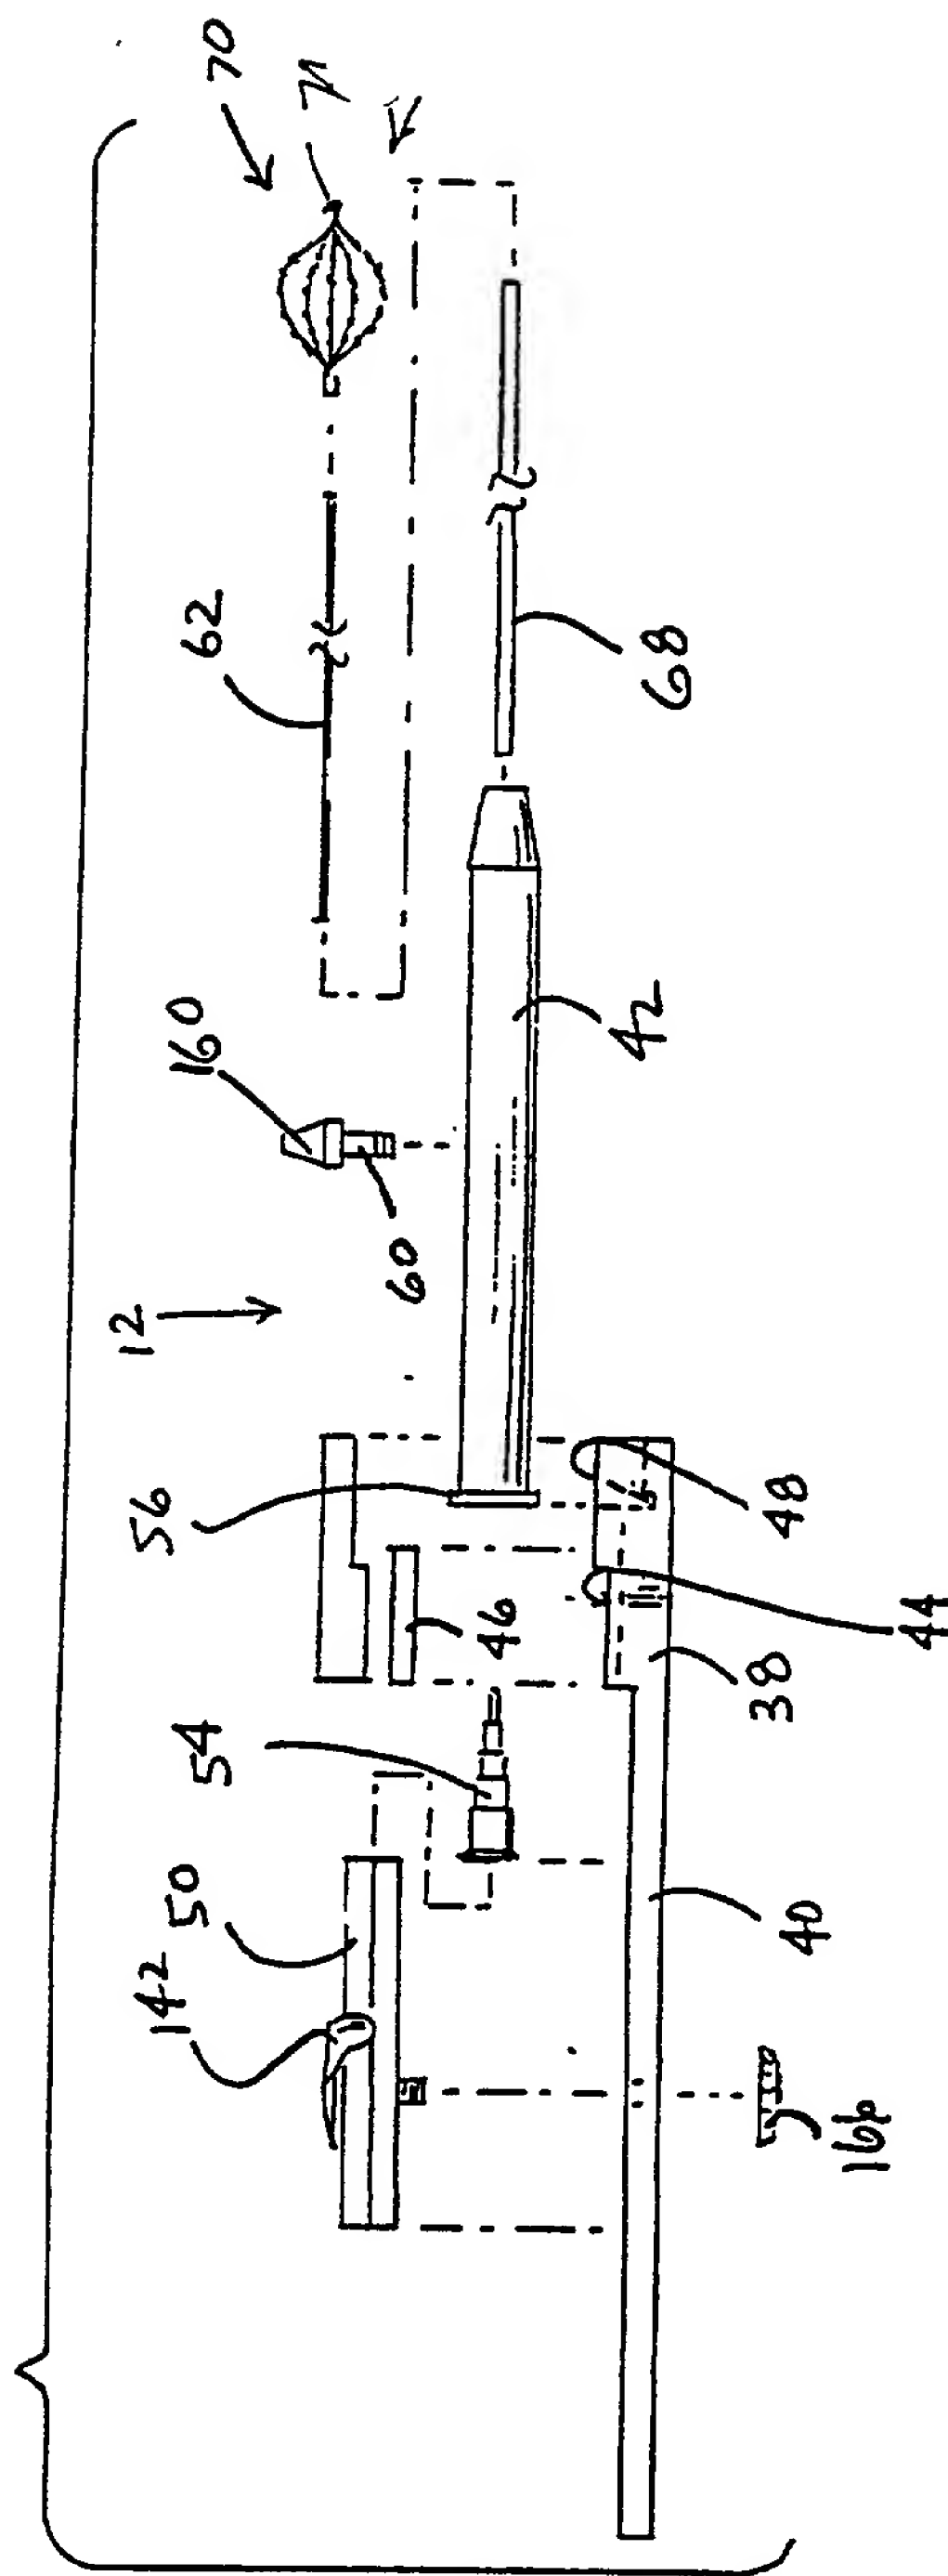


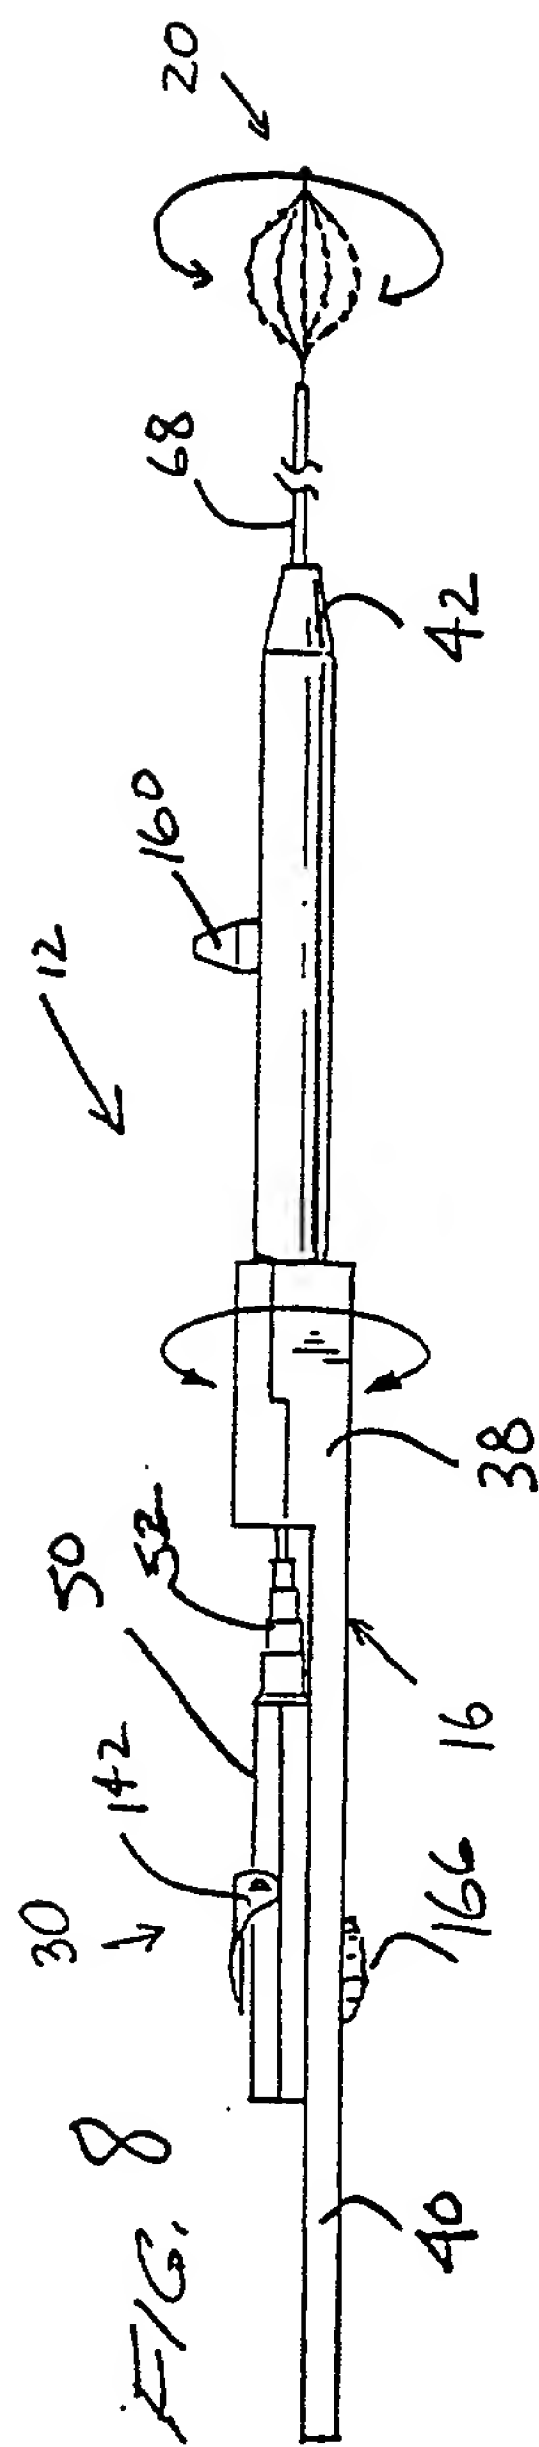


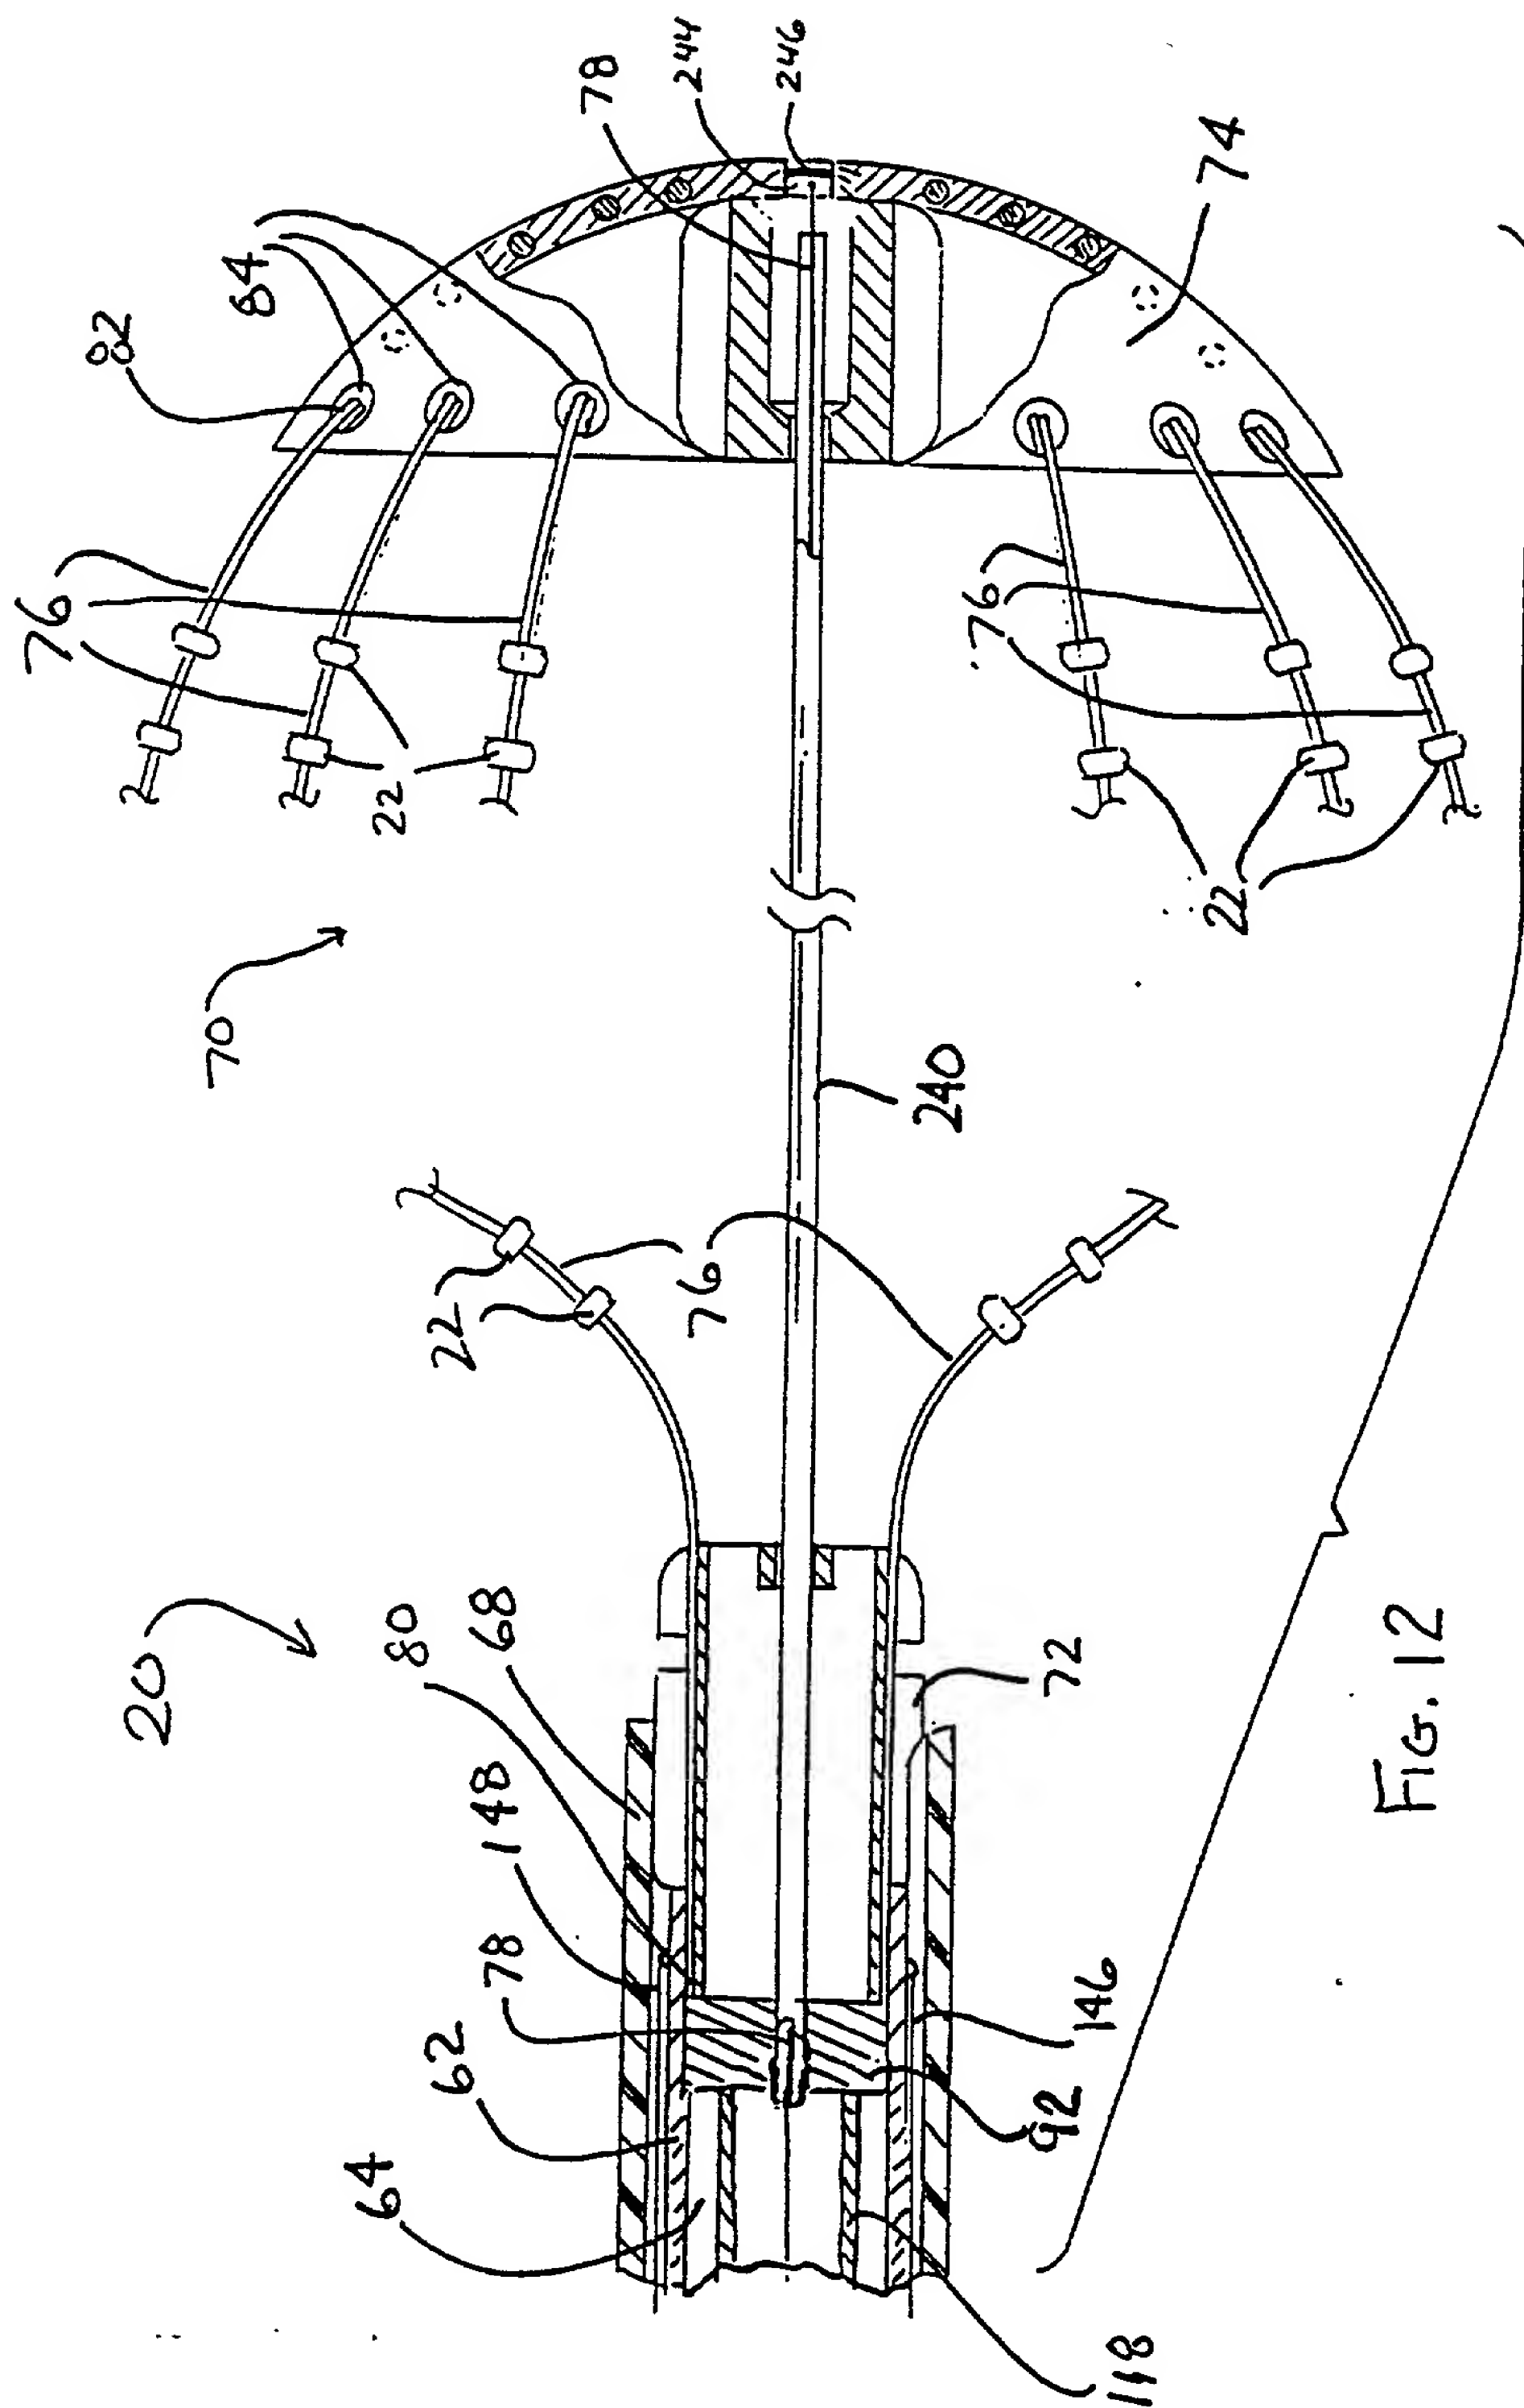


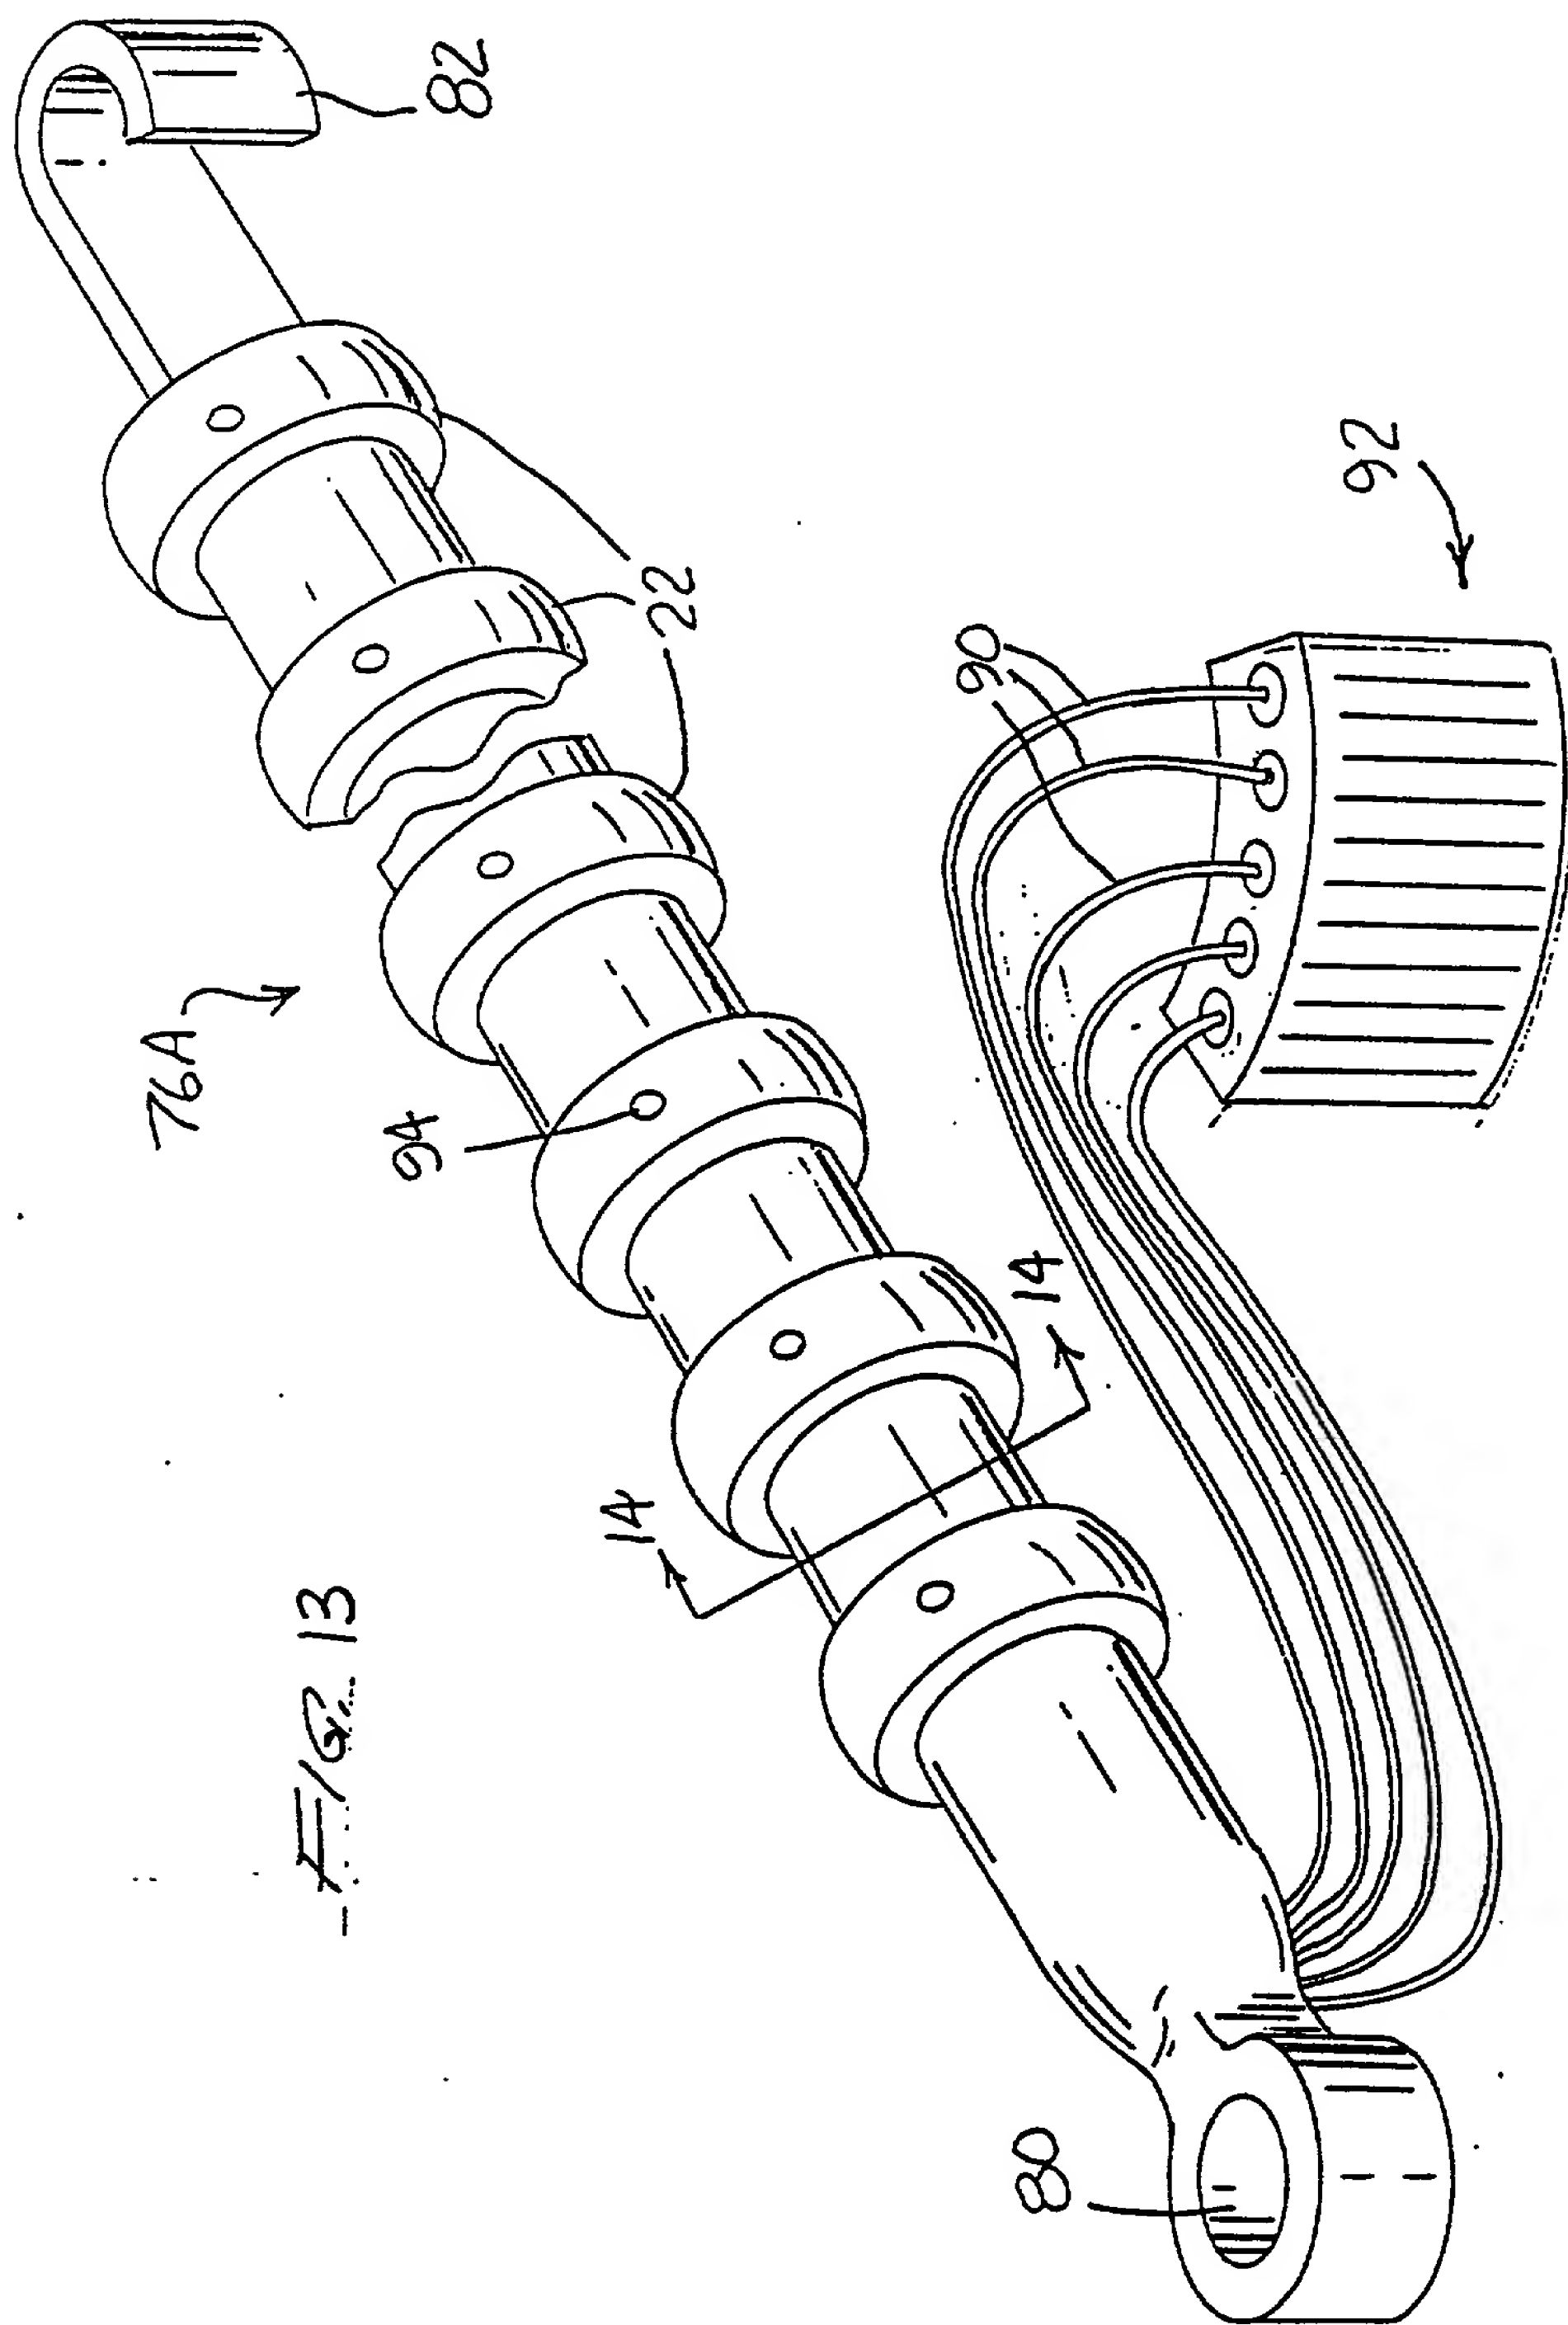




-F/G- 13

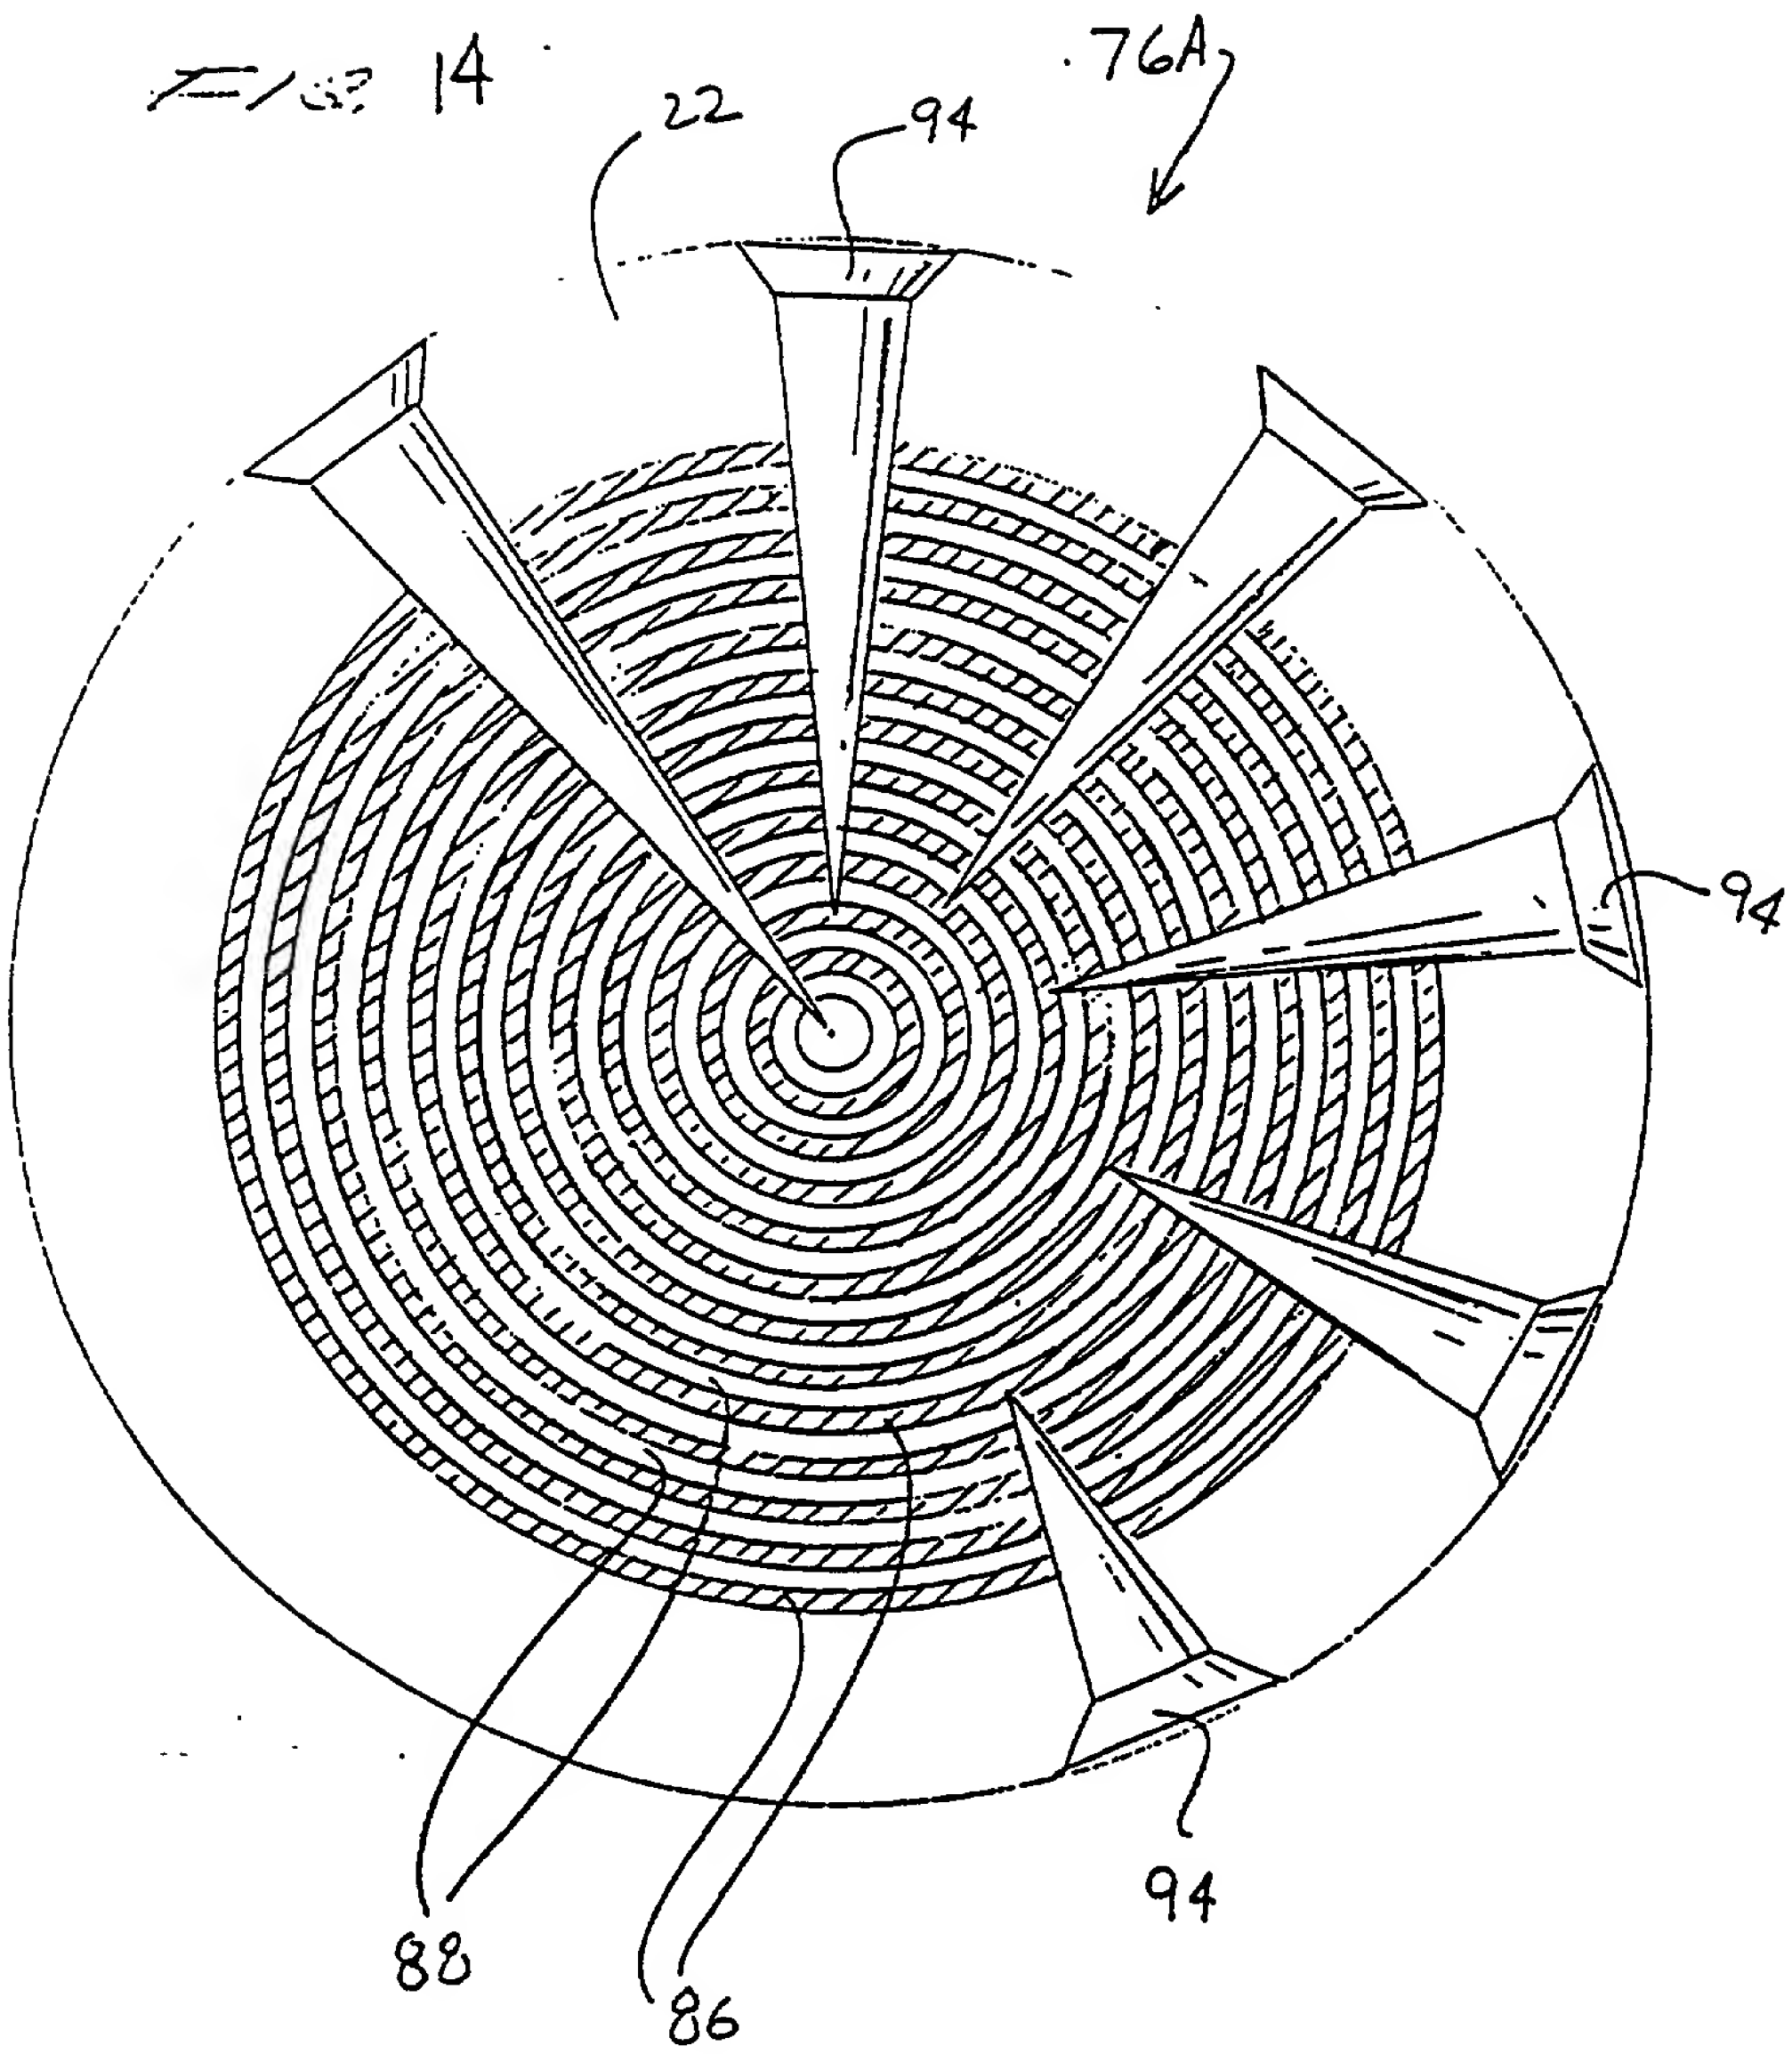

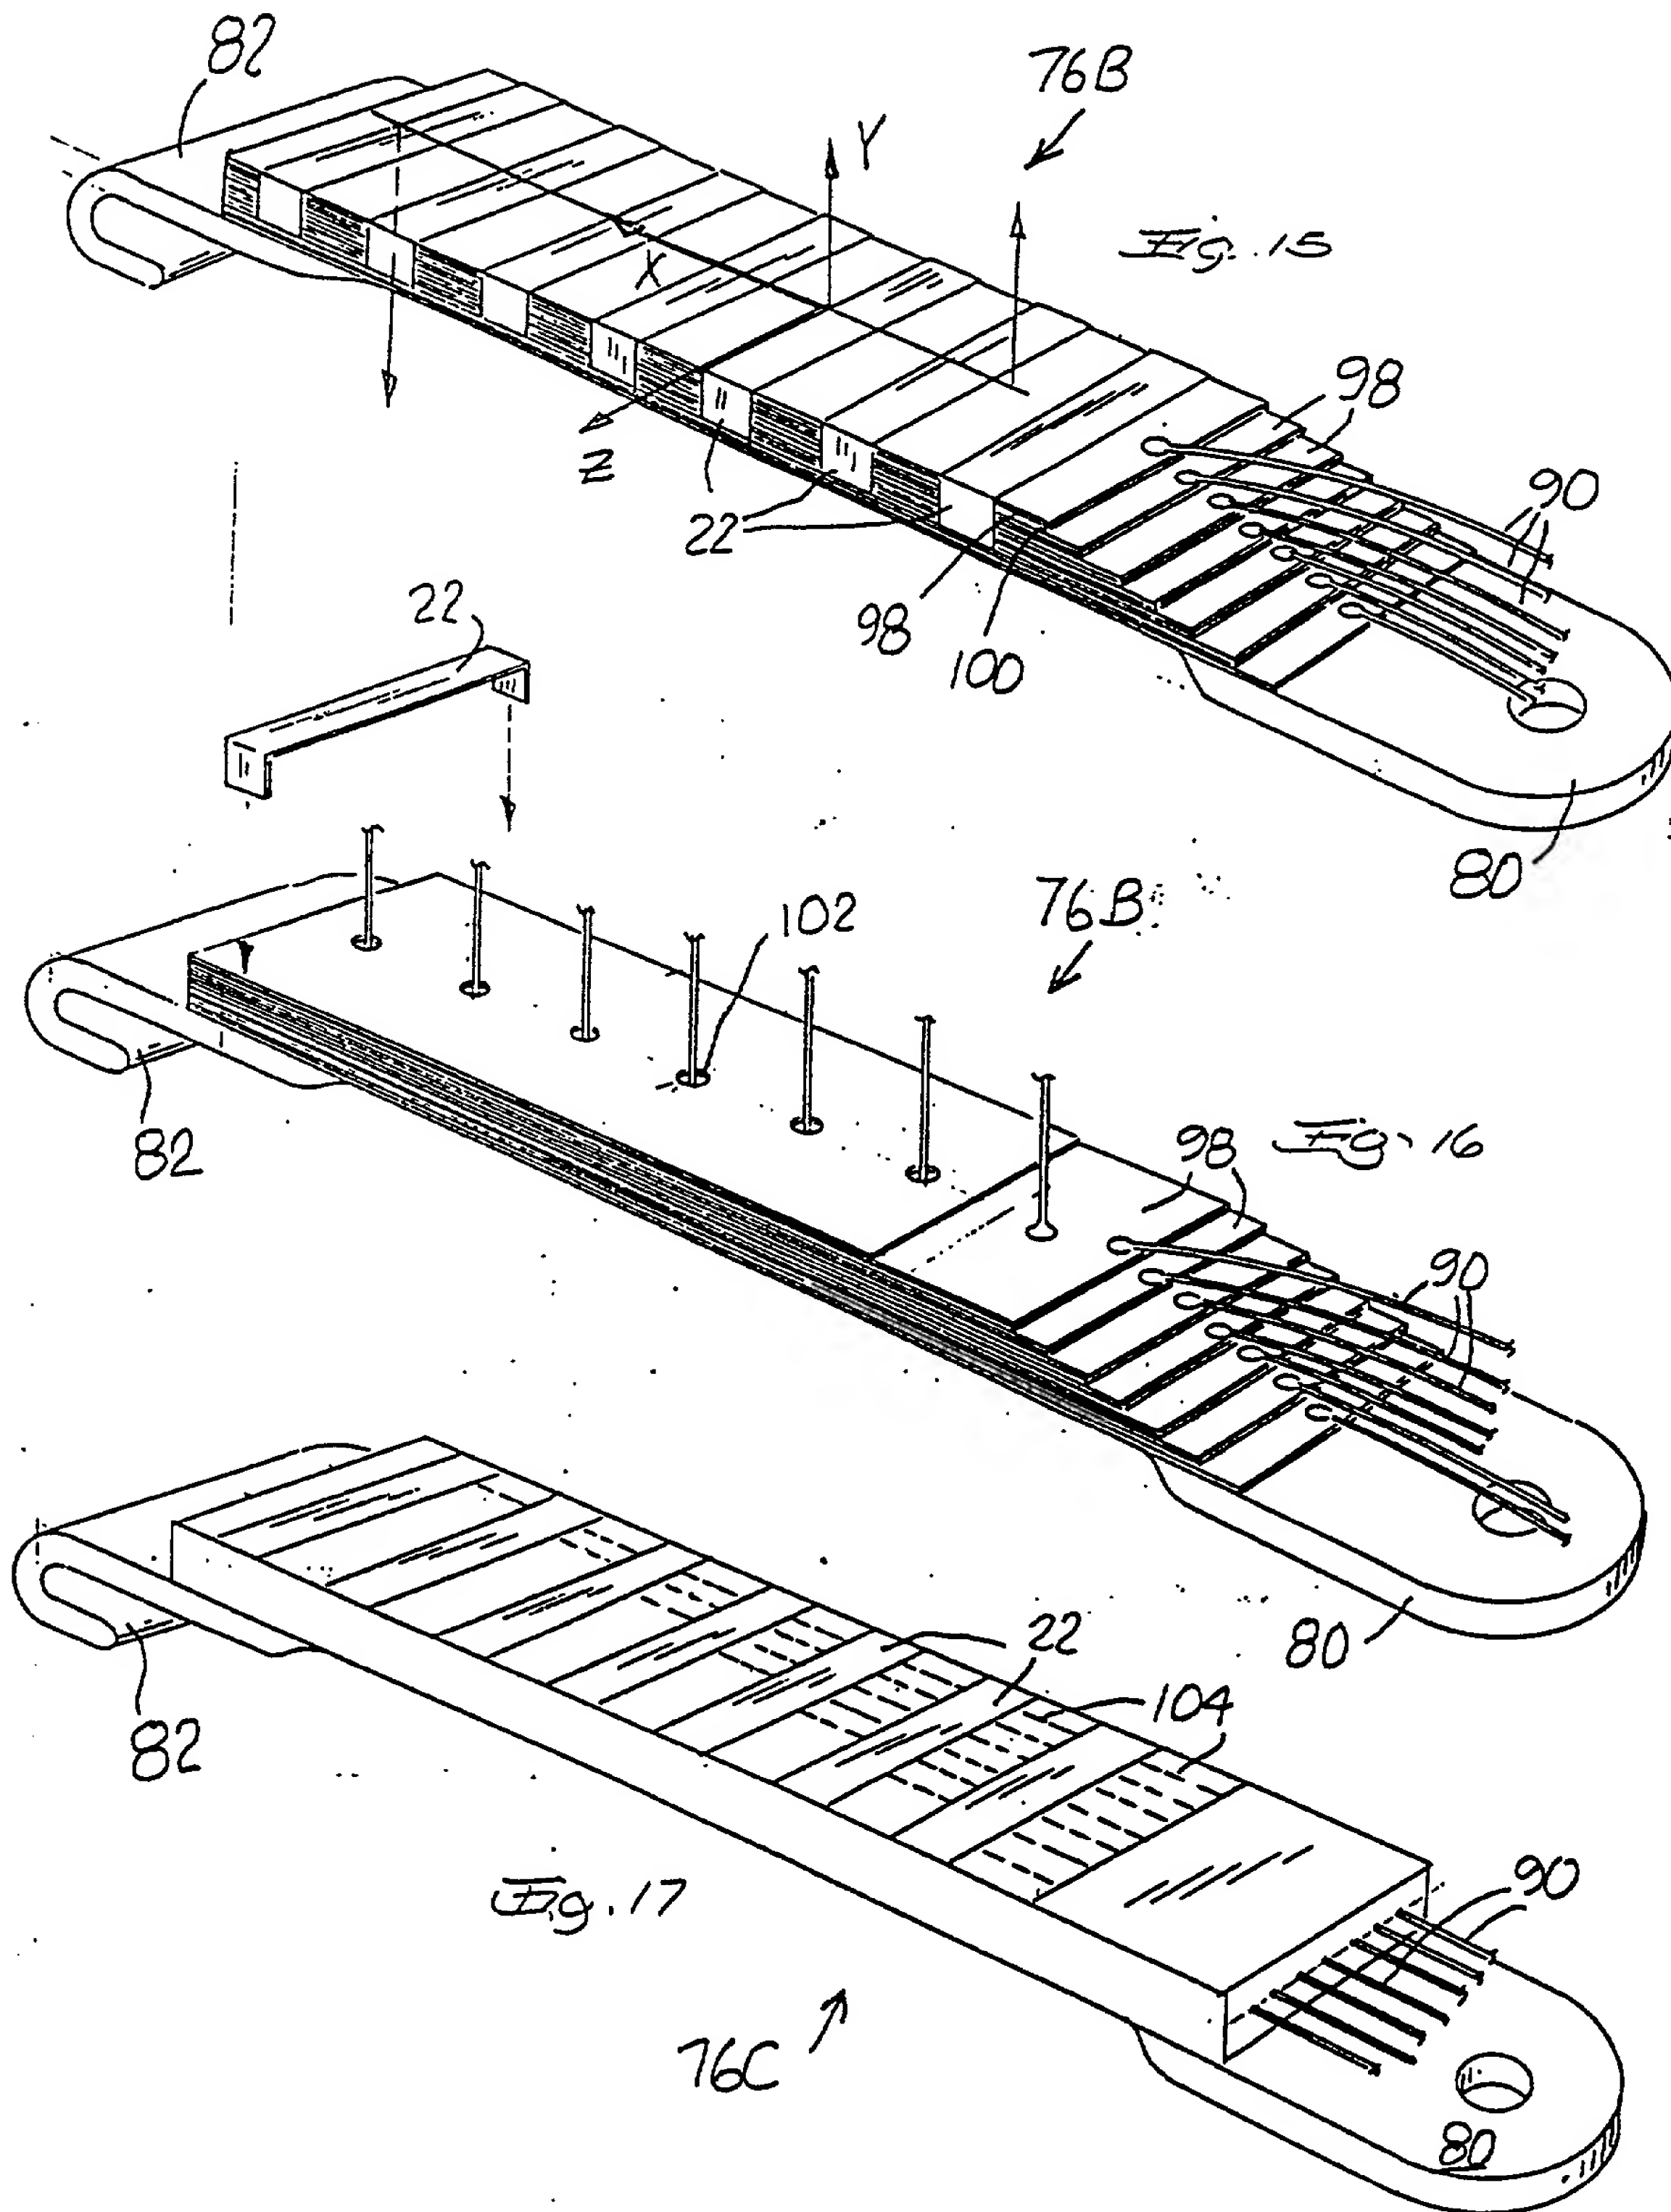

1. 1997-1998 2. 1998-1999 3. 1999-2000 4. 2000-2001 5. 2001-2002 6. 2002-2003 7. 2003-2004 8. 2004-2005 9. 2005-2006 10. 2006-2007 11. 2007-2008 12. 2008-2009 13. 2009-2010 14. 2010-2011 15. 2011-2012 16. 2012-2013 17. 2013-2014 18. 2014-2015 19. 2015-2016 20. 2016-2017 21. 2017-2018 22. 2018-2019 23. 2019-2020 24. 2020-2021 25. 2021-2022 26. 2022-2023 27. 2023-2024 28. 2024-2025 29. 2025-2026 30. 2026-2027 31. 2027-2028 32. 2028-2029 33. 2029-2030 34. 2030-2031 35. 2031-2032 36. 2032-2033 37. 2033-2034 38. 2034-2035 39. 2035-2036 40. 2036-2037 41. 2037-2038 42. 2038-2039 43. 2039-2040 44. 2040-2041 45. 2041-2042 46. 2042-2043 47. 2043-2044 48. 2044-2045 49. 2045-2046 50. 2046-2047 51. 2047-2048 52. 2048-2049 53. 2049-2050 54. 2050-2051 55. 2051-2052 56. 2052-2053 57. 2053-2054 58. 2054-2055 59. 2055-2056 60. 2056-2057 61. 2057-2058 62. 2058-2059 63. 2059-2060 64. 2060-2061 65. 2061-2062 66. 2062-2063 67. 2063-2064 68. 2064-2065 69. 2065-2066 70. 2066-2067 71. 2067-2068 72. 2068-2069 73. 2069-2070 74. 2070-2071 75. 2071-2072 76. 2072-2073 77. 2073-2074 78. 2074-2075 79. 2075-2076 80. 2076-2077 81. 2077-2078 82. 2078-2079 83. 2079-2080 84. 2080-2081 85. 2081-2082 86. 2082-2083 87. 2083-2084 88. 2084-2085 89. 2085-2086 90. 2086-2087 91. 2087-2088 92. 2088-2089 93. 2089-2090 94. 2090-2091 95. 2091-2092 96. 2092-2093 97. 2093-2094 98. 2094-2095 99. 2095-2096 100. 2096-2097 101. 2097-2098 102. 2098-2099 103. 2099-2100 104. 2100-2101 105. 2101-2102 106. 2102-2103 107. 2103-2104 108. 2104-2105 109. 2105-2106 110. 2106-2107 111. 2107-2108 112. 2108-2109 113. 2109-2110 114. 2110-2111 115. 2111-2112 116. 2112-2113 117. 2113-2114 118. 2114-2115 119. 2115-2116 120. 2116-2117 121. 2117-2118 122. 2118-2119 123. 2119-2120 124. 2120-2121 125. 2121-2122 126. 2122-2123 127. 2123-2124 128. 2124-2125 129. 2125-2126 130. 2126-2127 131. 2127-2128 132. 2128-2129 133. 2129-2130 134. 2130-2131 135. 2131-2132 136. 2132-2133 137. 2133-2134 138. 2134-2135 139. 2135-2136 140. 2136-2137 141. 2137-2138 142. 2138-2139 143. 2139-2140 144. 2140-2141 145. 2141-2142 146. 2142-2143 147. 2143-2144 148. 2144-2145 149. 2145-2146 150. 2146-2147 151. 2147-2148 152. 2148-2149 153. 2149-2150 154. 2150-2151 155. 2151-2152 156. 2152-2153 157. 2153-2154 158. 2154-2155 159. 2155-2156 160. 2156-2157 161. 2157-2158 162. 2158-2159 163. 2159-2160 164. 2160-2161 165. 2161-2162 166. 2162-2163 167. 2163-2164 168. 2164-2165 169. 2165-2166 170. 2166-2167 171. 2167-2168 172. 2168-2169 173. 2169-2170 174. 2170-2171 175. 2171-2172 176. 2172-2173 177. 2173-2174 178. 2174-2175 179. 2175-2176 180. 2176-2177 181. 2177-2178 182. 2178-2179 183. 2179-2180 184. 2180-2181 185. 2181-2182 186. 2182-2183 187. 2183-2184 188. 2184-2185 189. 2185-2186 190. 2186-2187 191. 2187-2188 192. 2188-2189 193. 2189-2190 194. 2190-2191 195. 2191-2192 196. 2192-2193 197. 2193-2194 198. 2194-2195 199. 2195-2196 200. 2196-2197 201. 2197-2198 202. 2198-2199 203. 2199-2200 204. 2200-2201 205. 2201-2202 206. 2202-2203 207. 2203-2204 208. 2204-2205 209. 2205-2206 210. 2206-2207 211. 2207-2208 212. 2208-2209 213. 2209-2210 214. 2210-2211 215. 2211-2212 216. 2212-2213 217. 2213-2214 218. 2214-2215 219. 2215-2216 220. 2216-2217 221.	
--	--

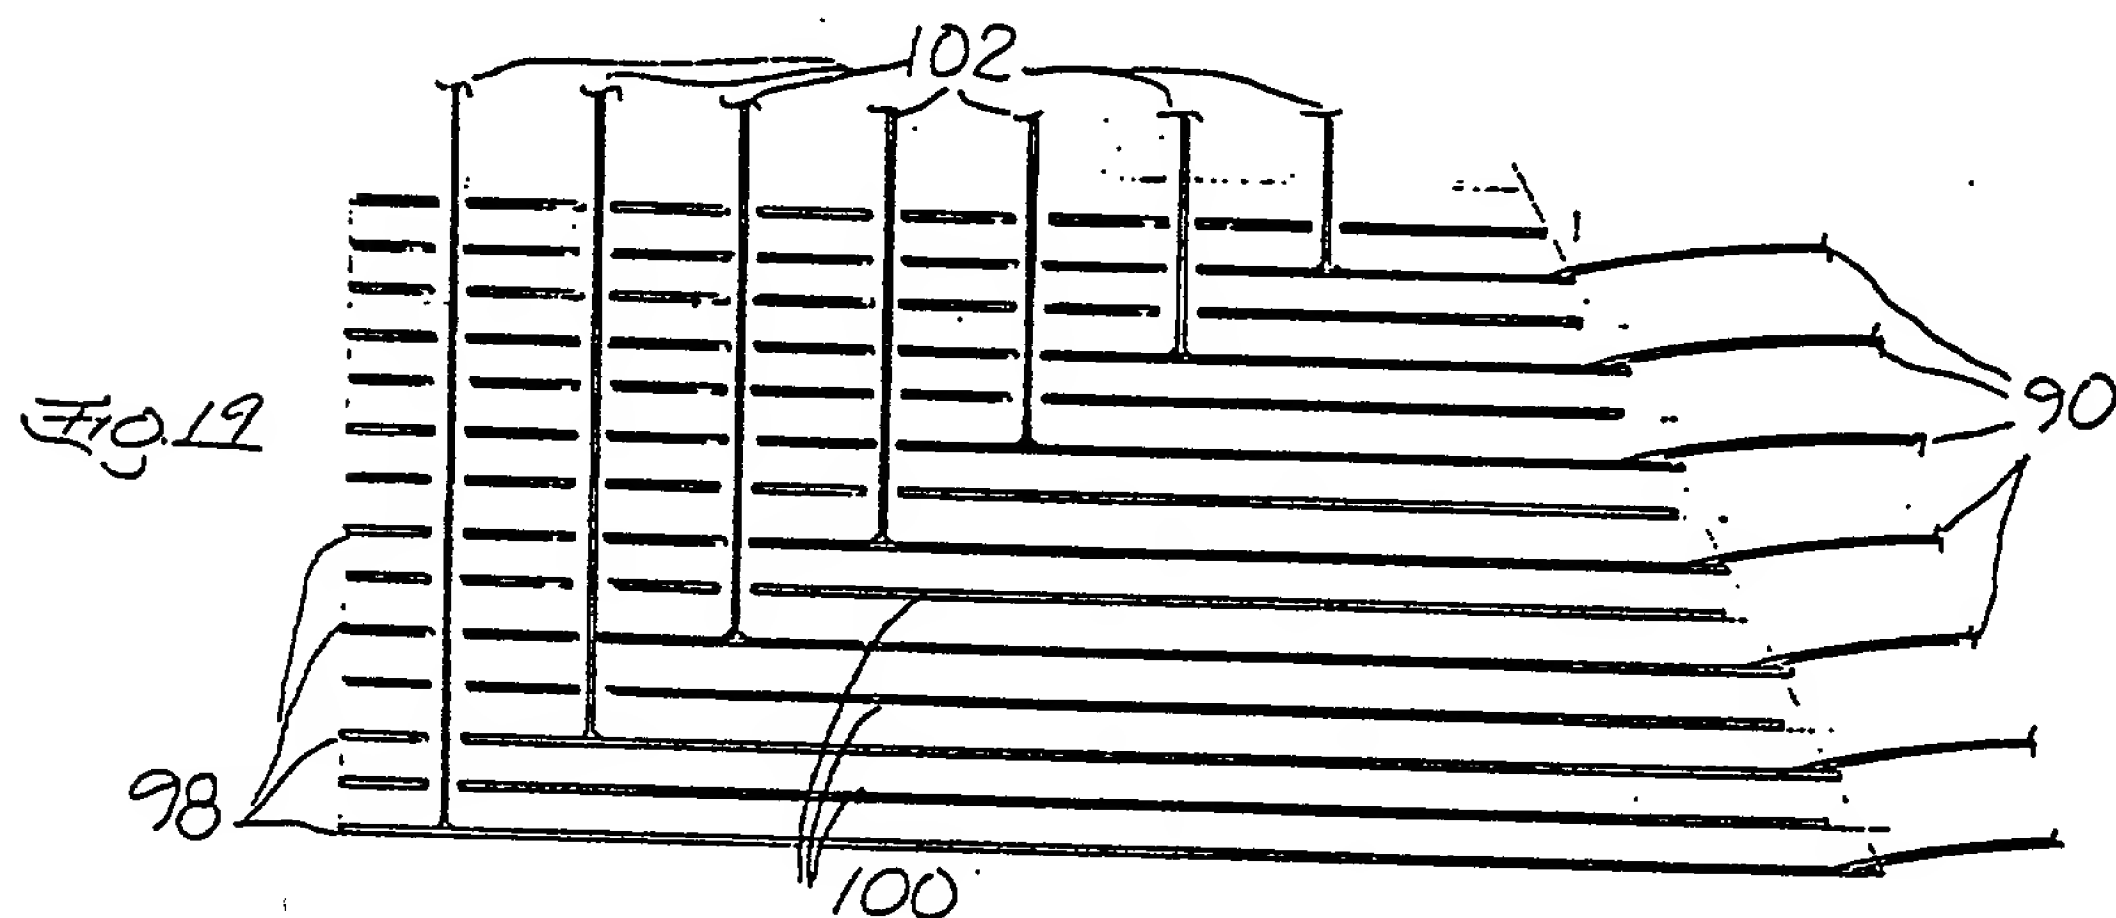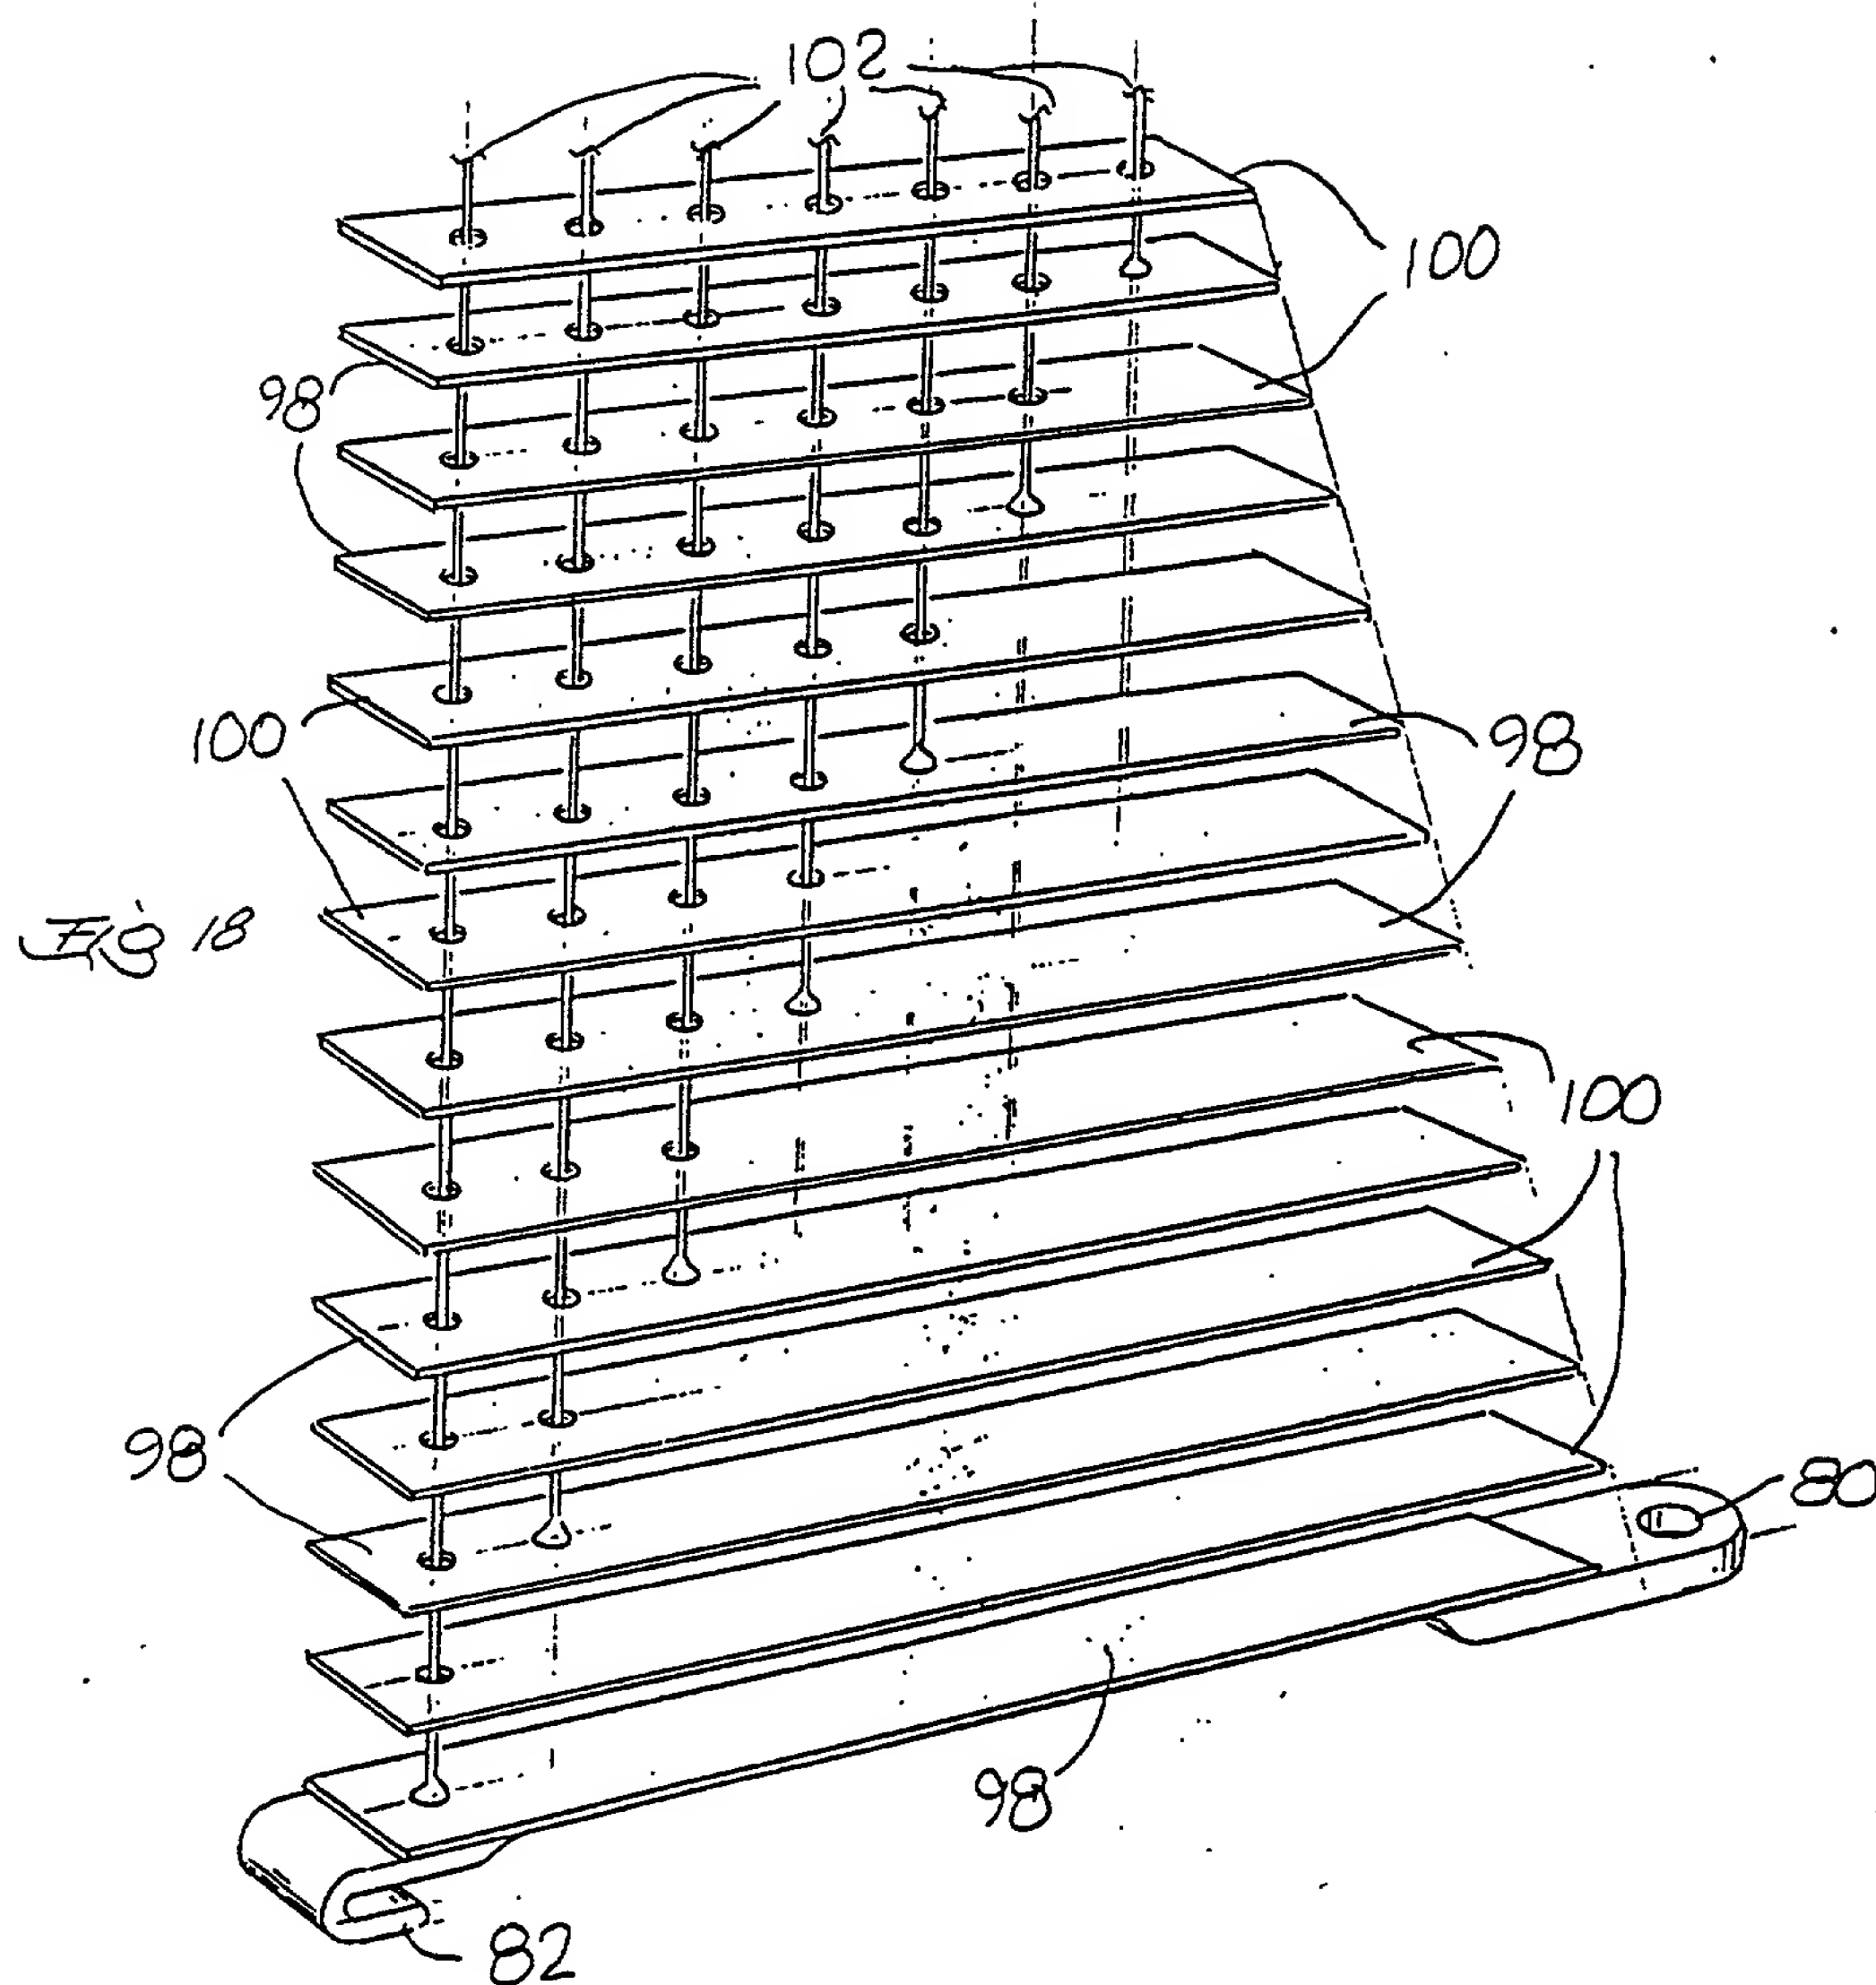

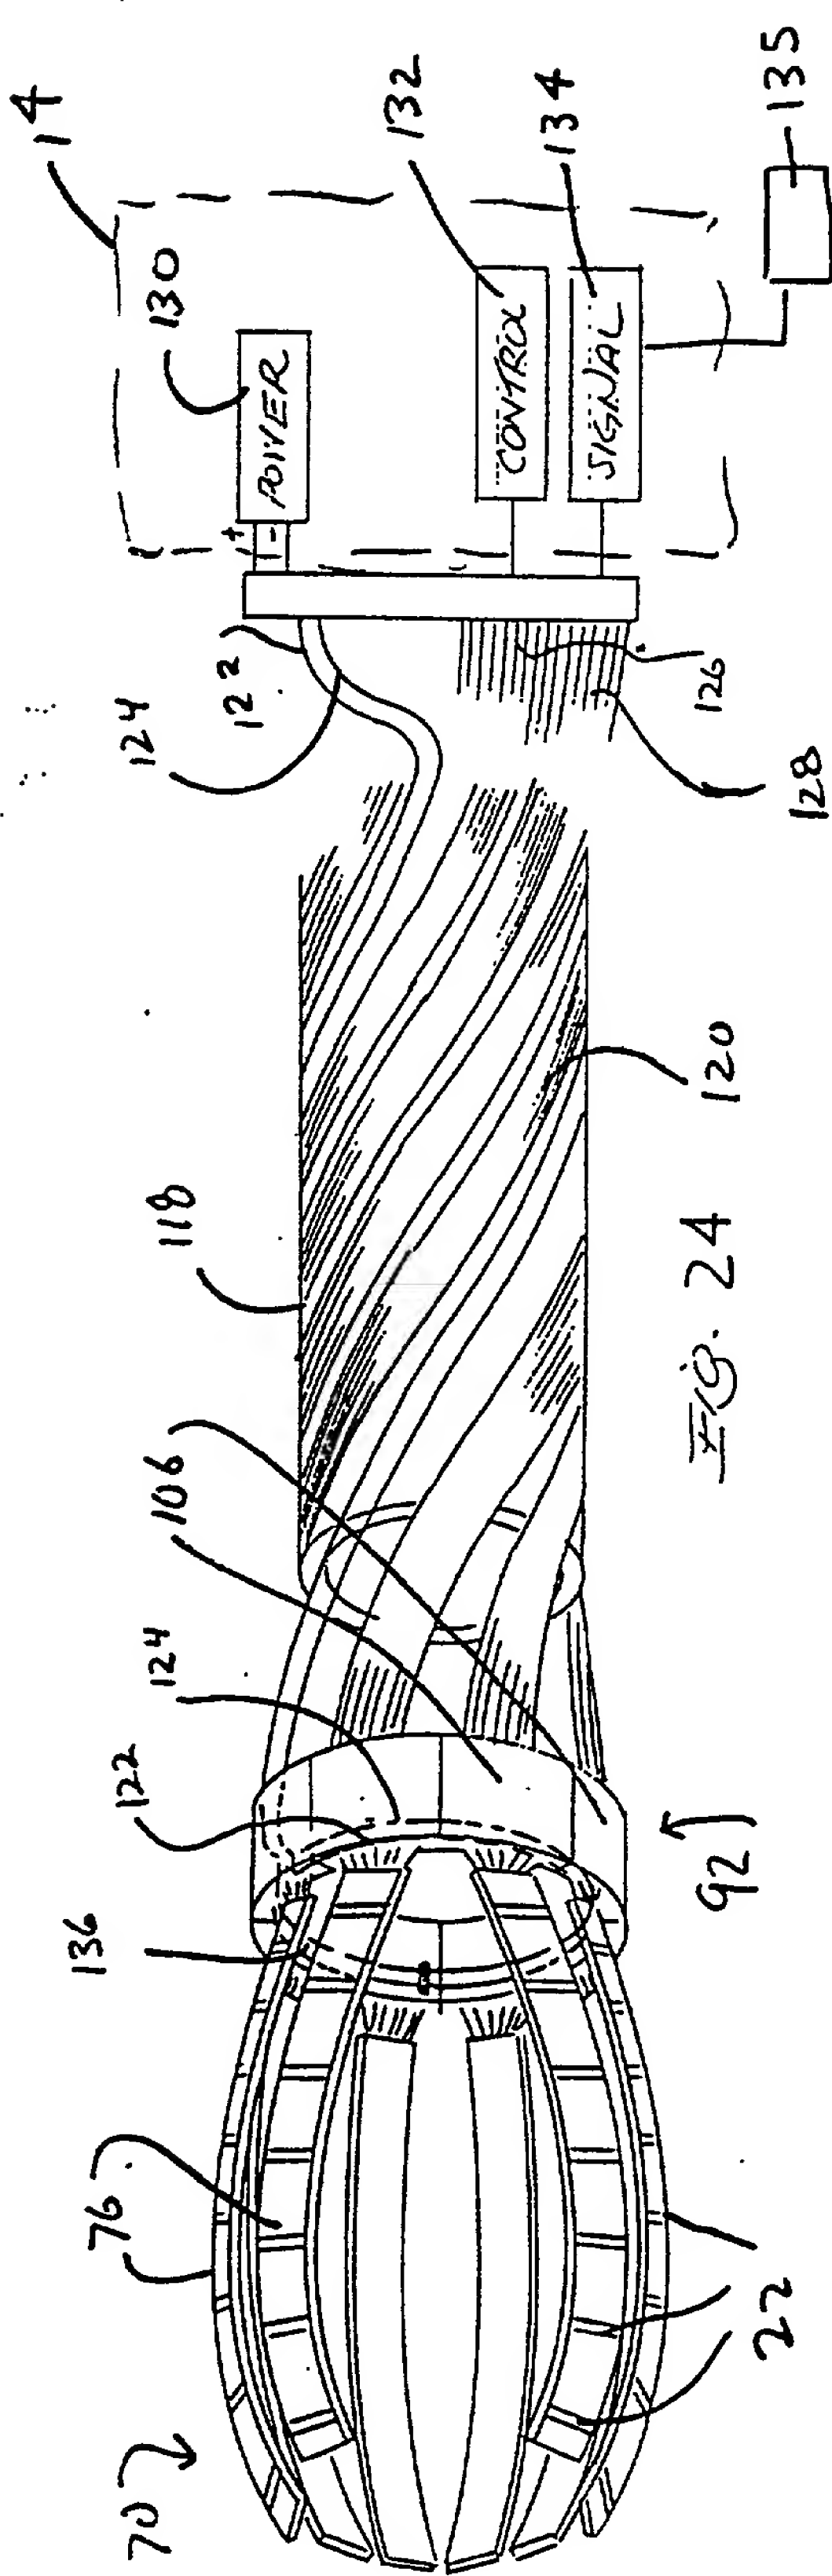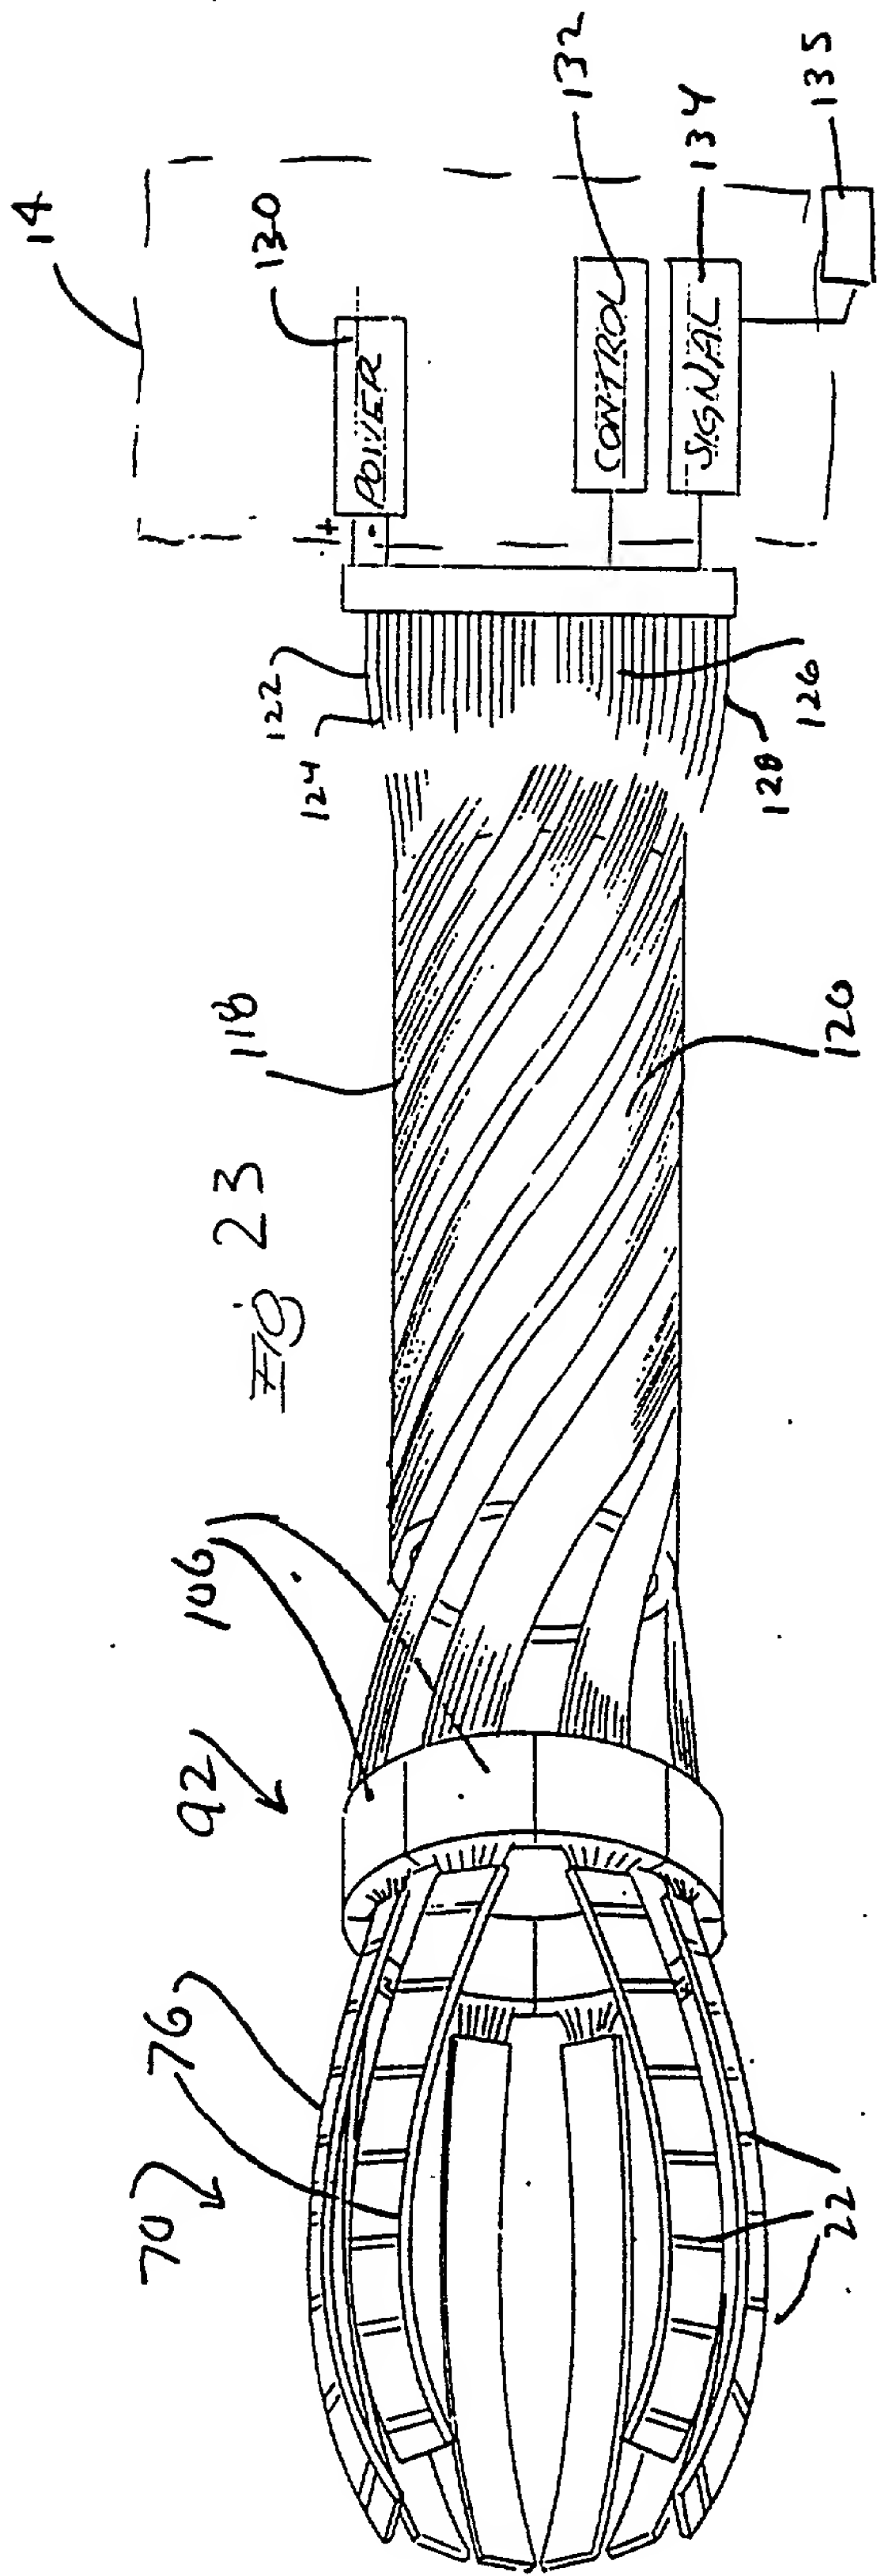






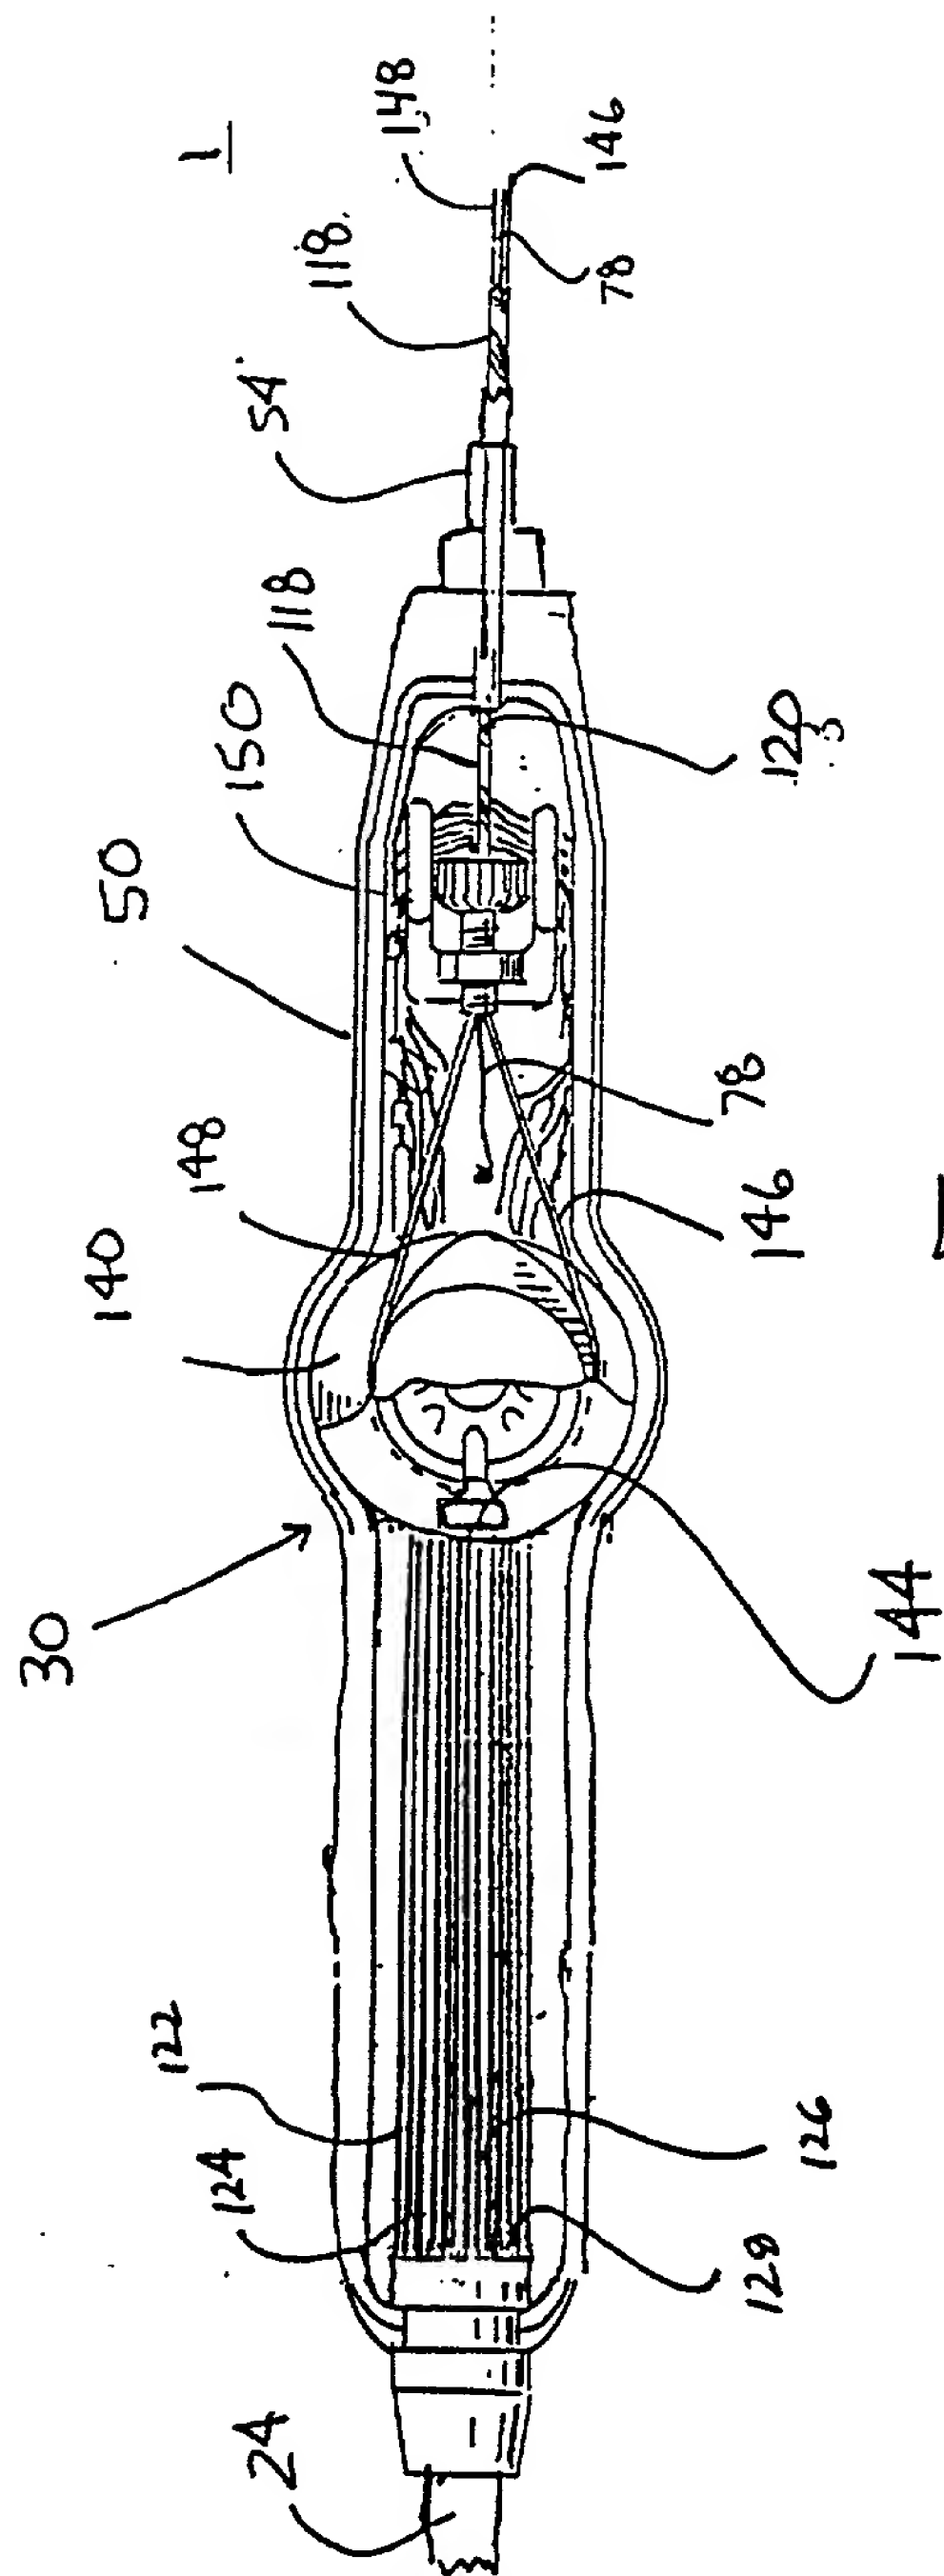


FIG. 25

14/20

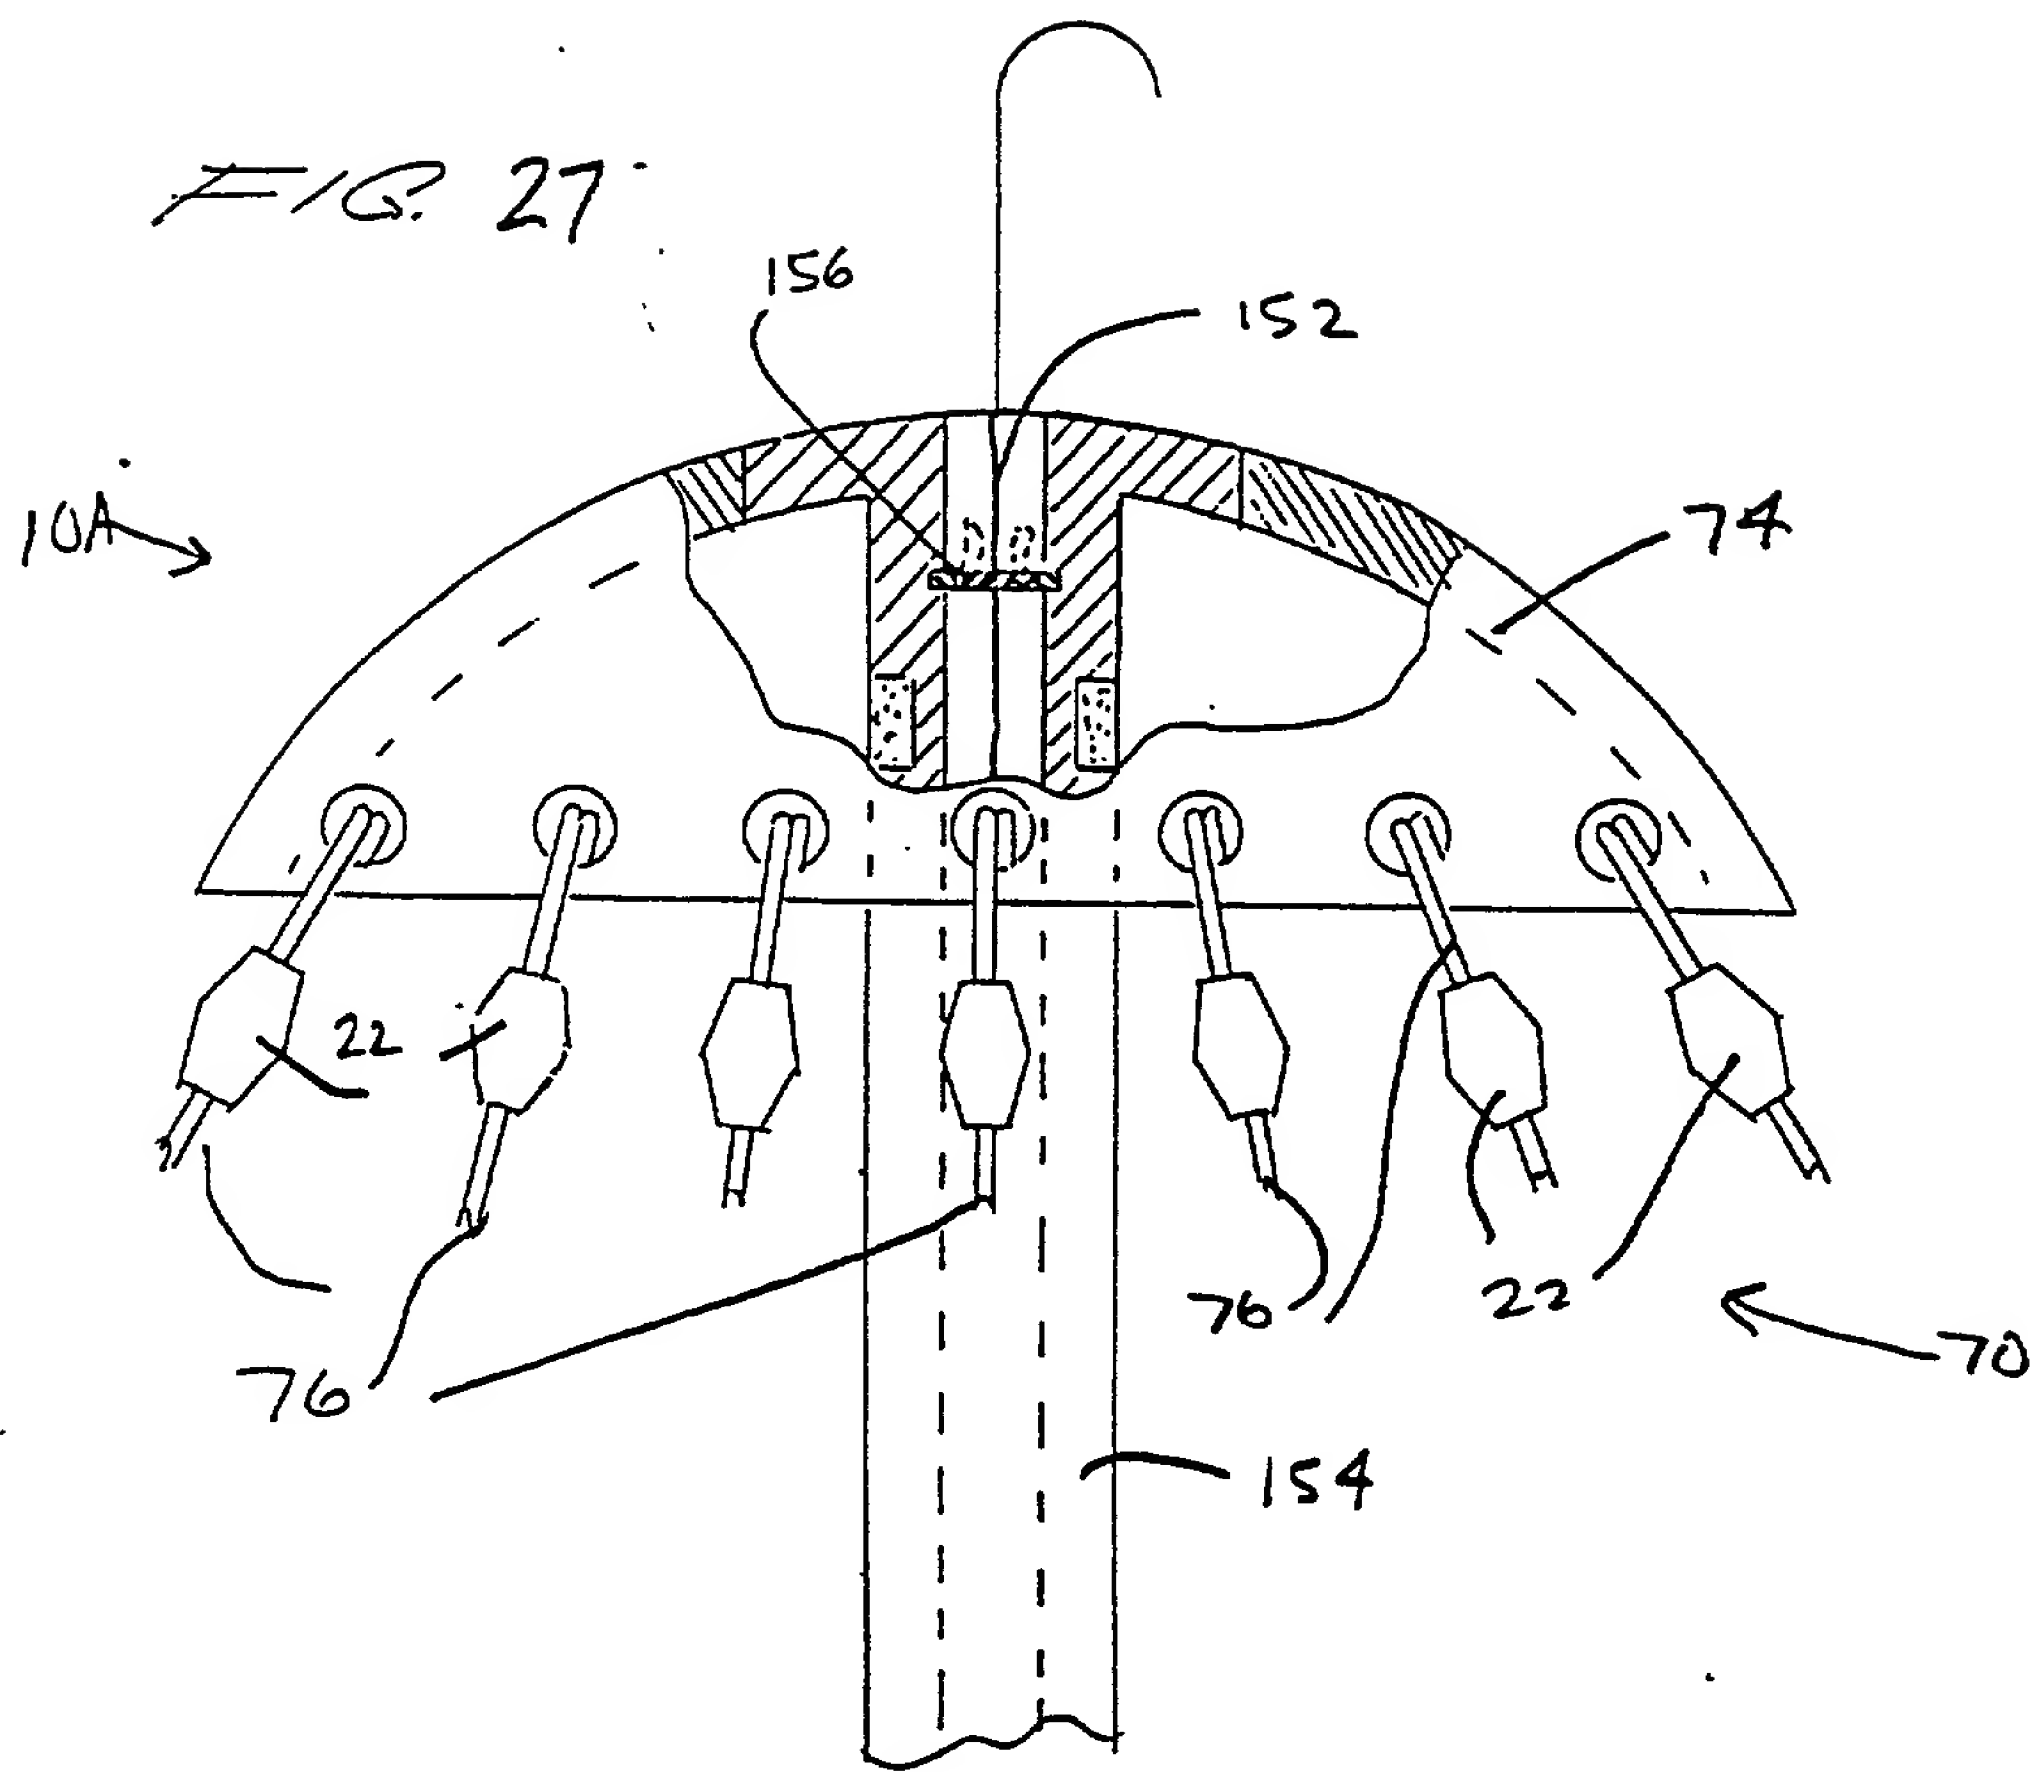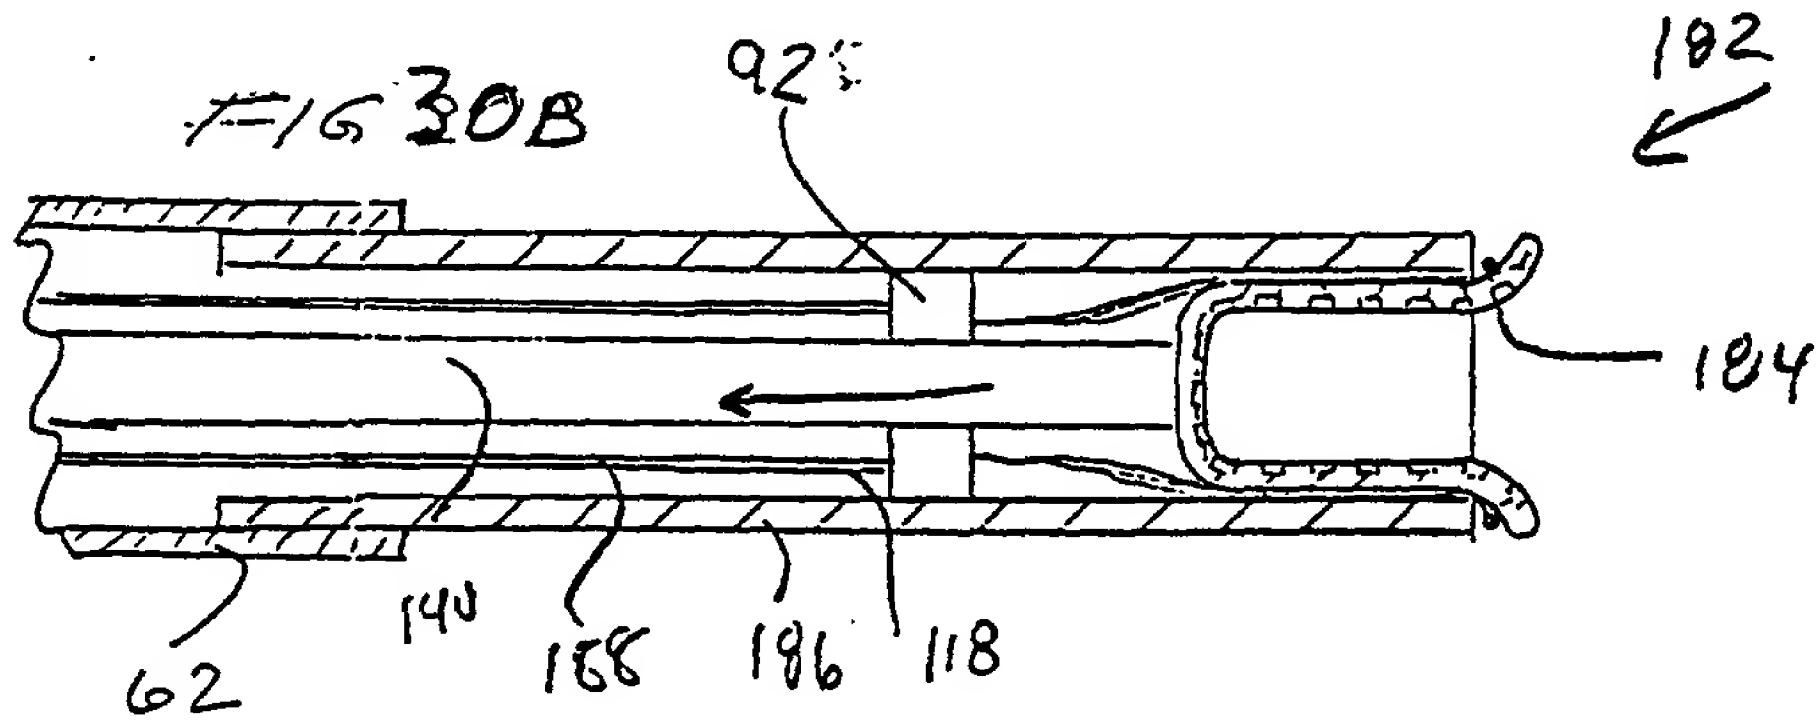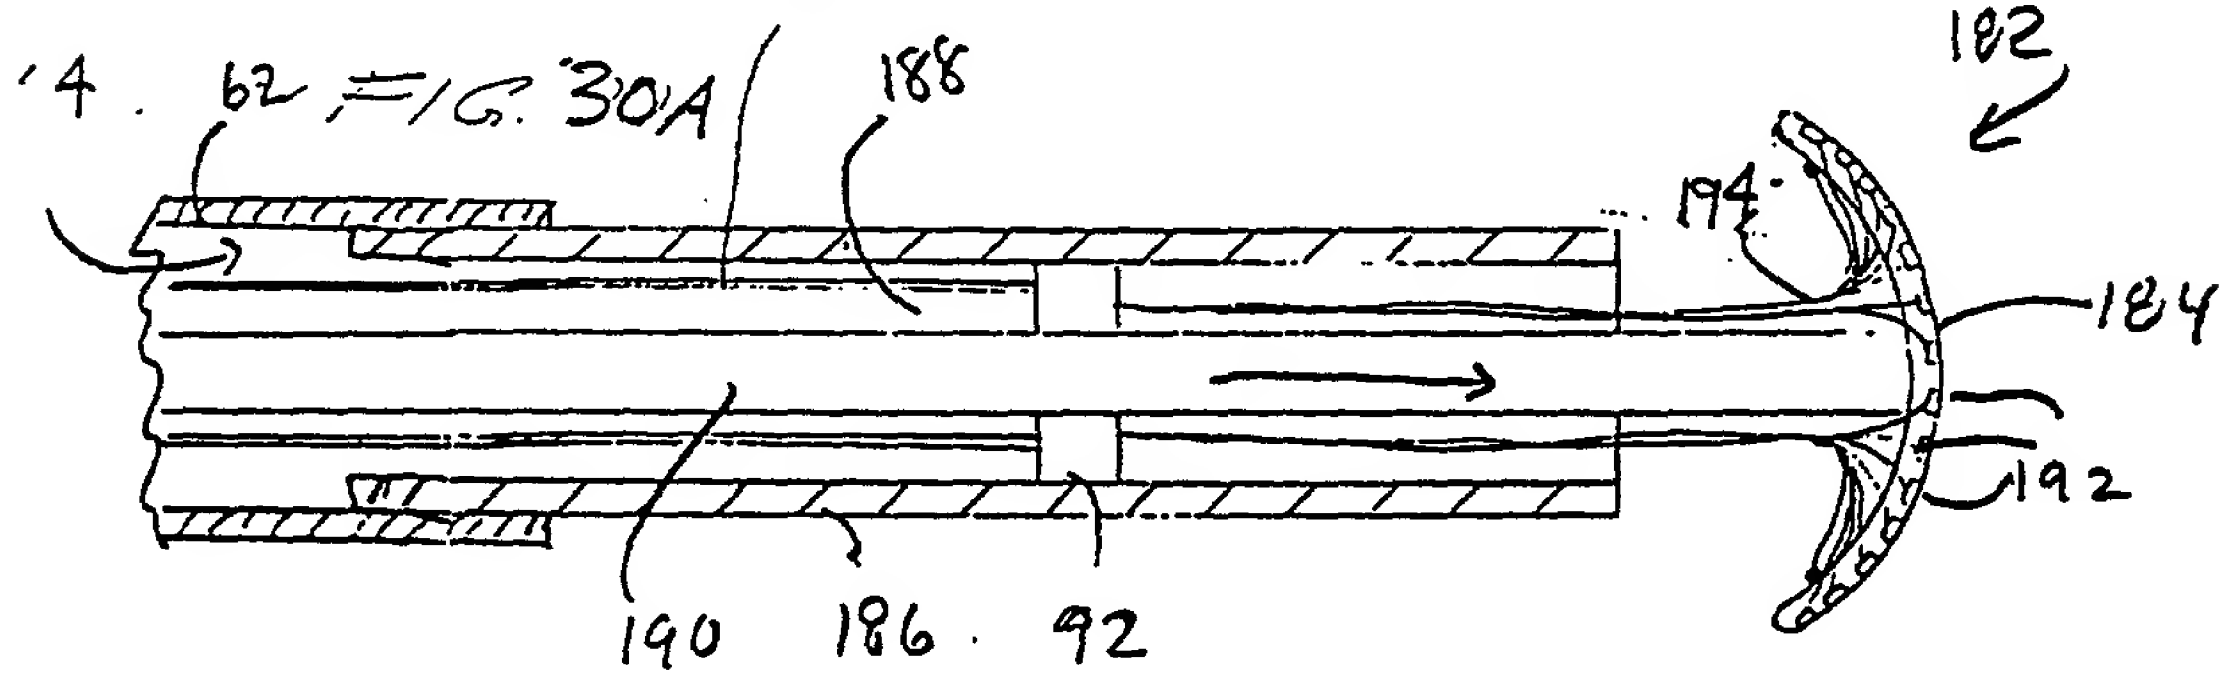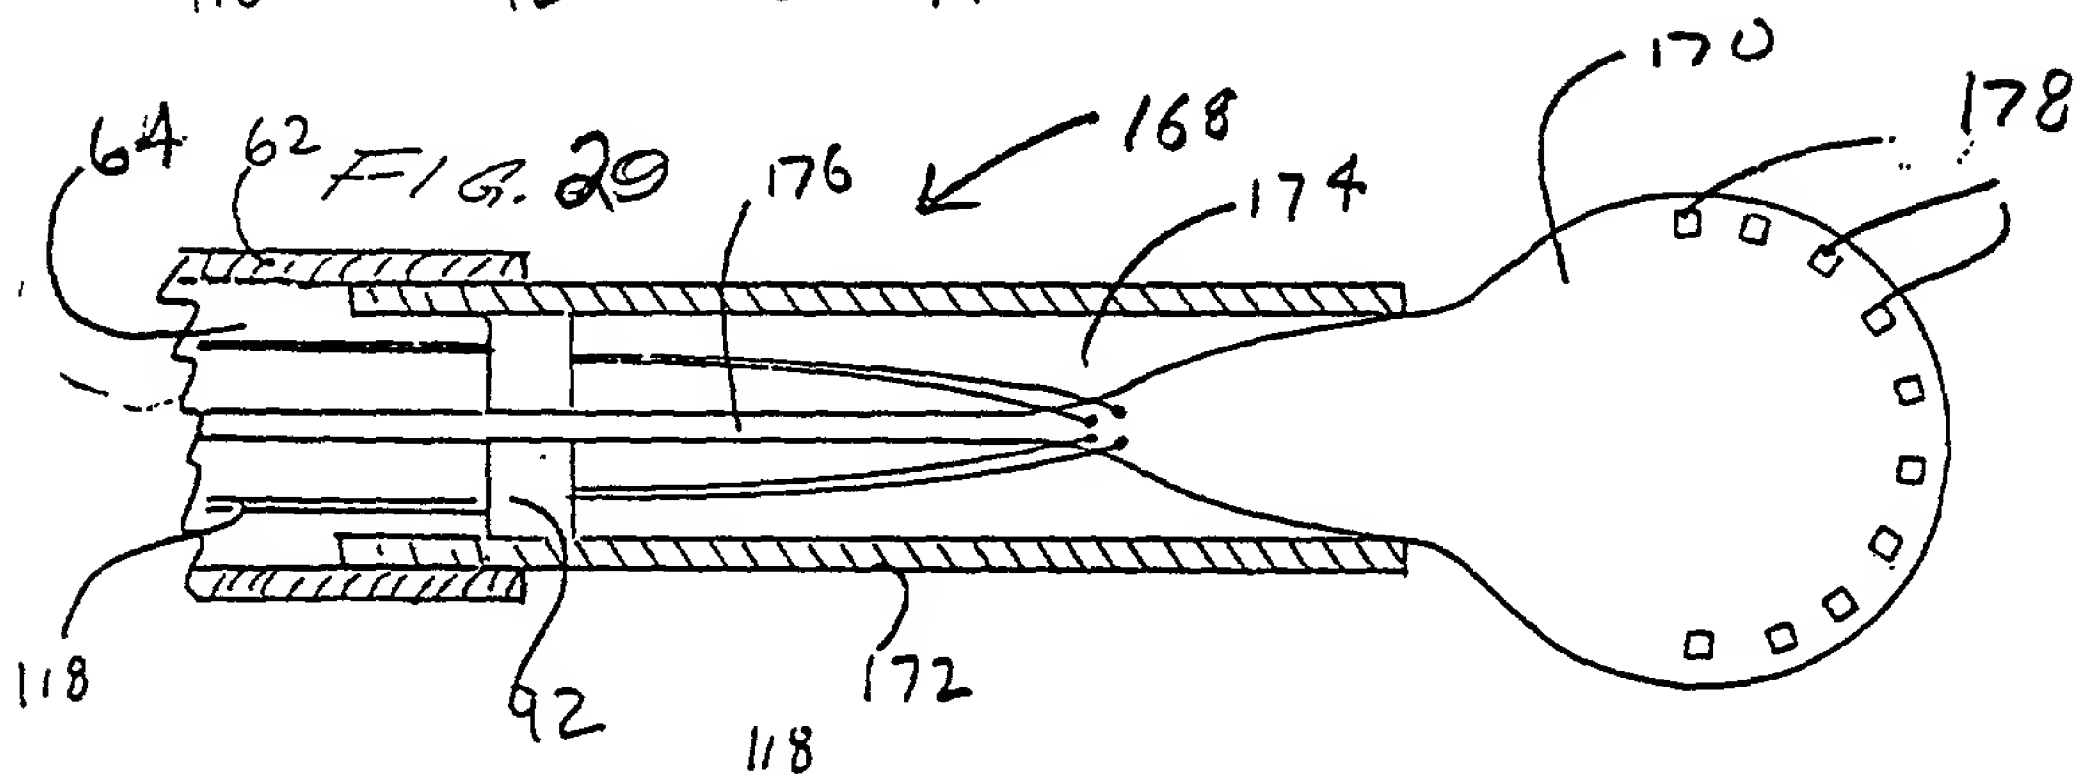

2025 RELEASE UNDER E.O. 14176

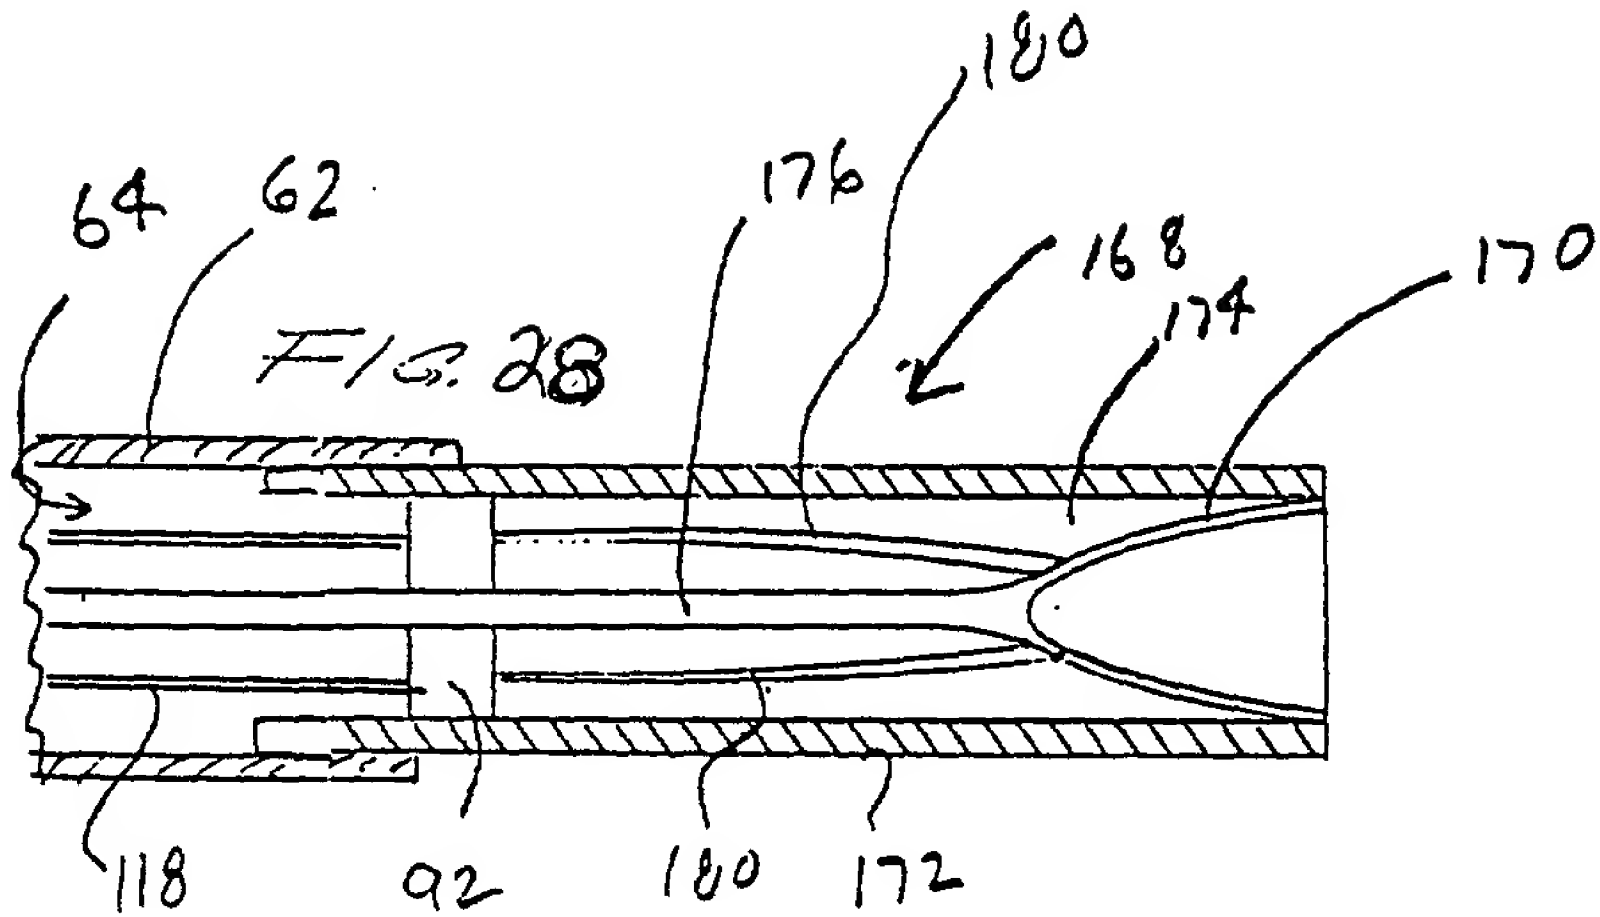

16/20

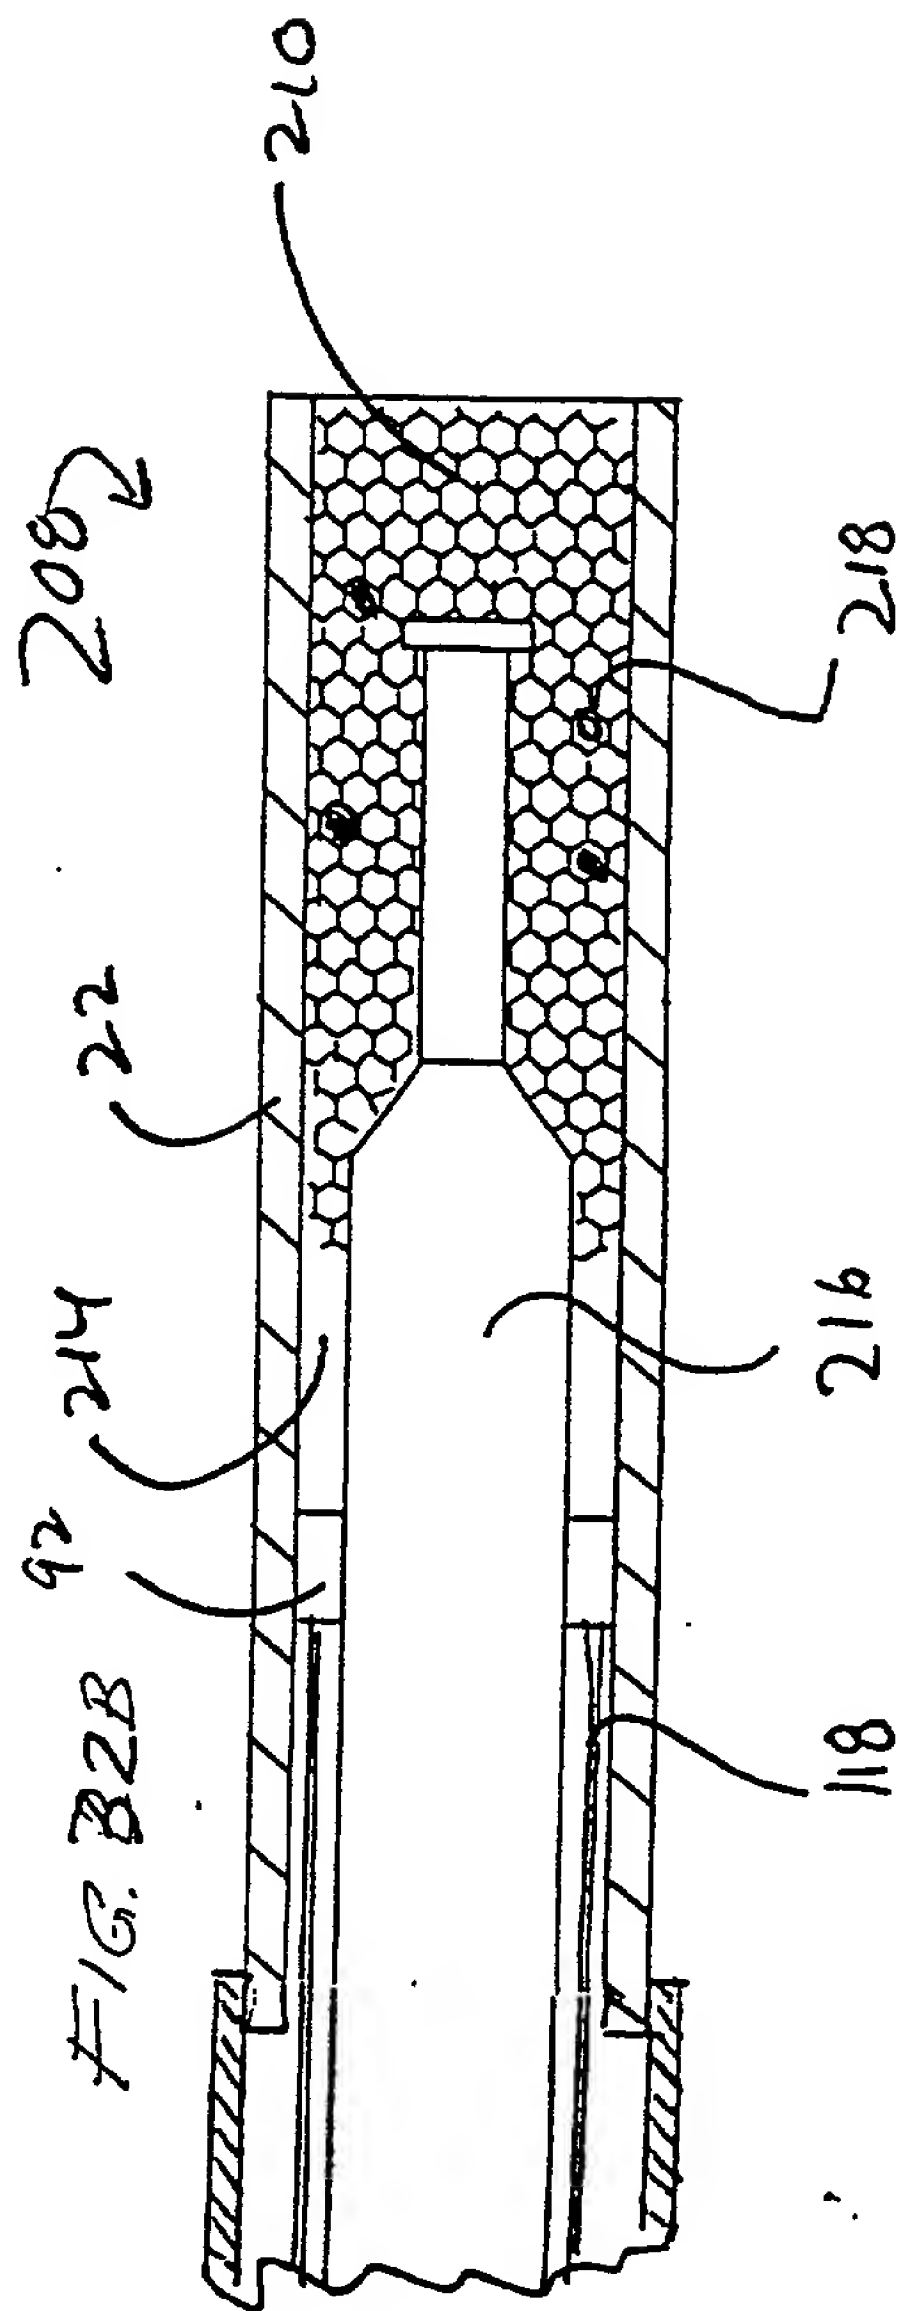
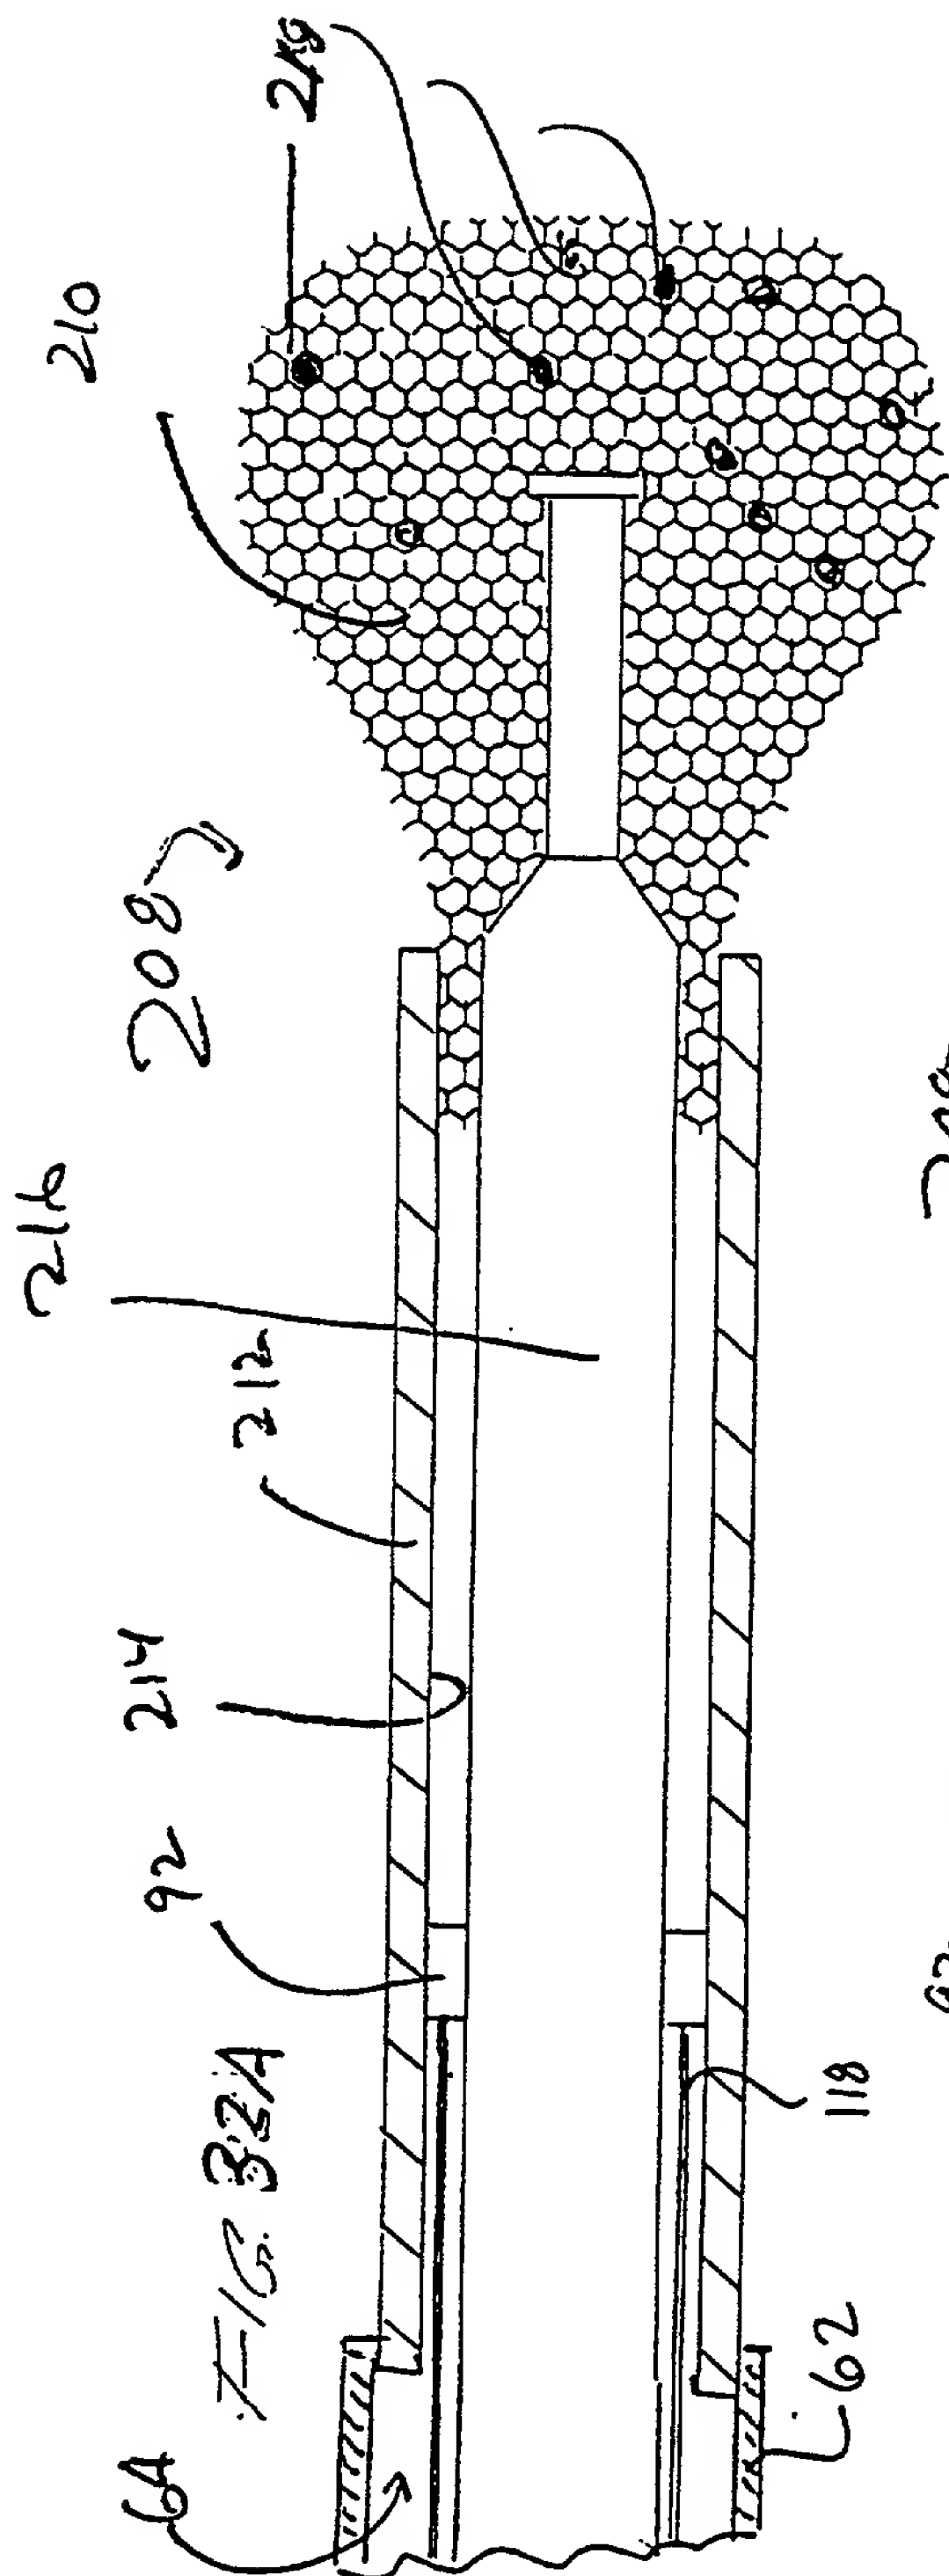


FIG. 33.

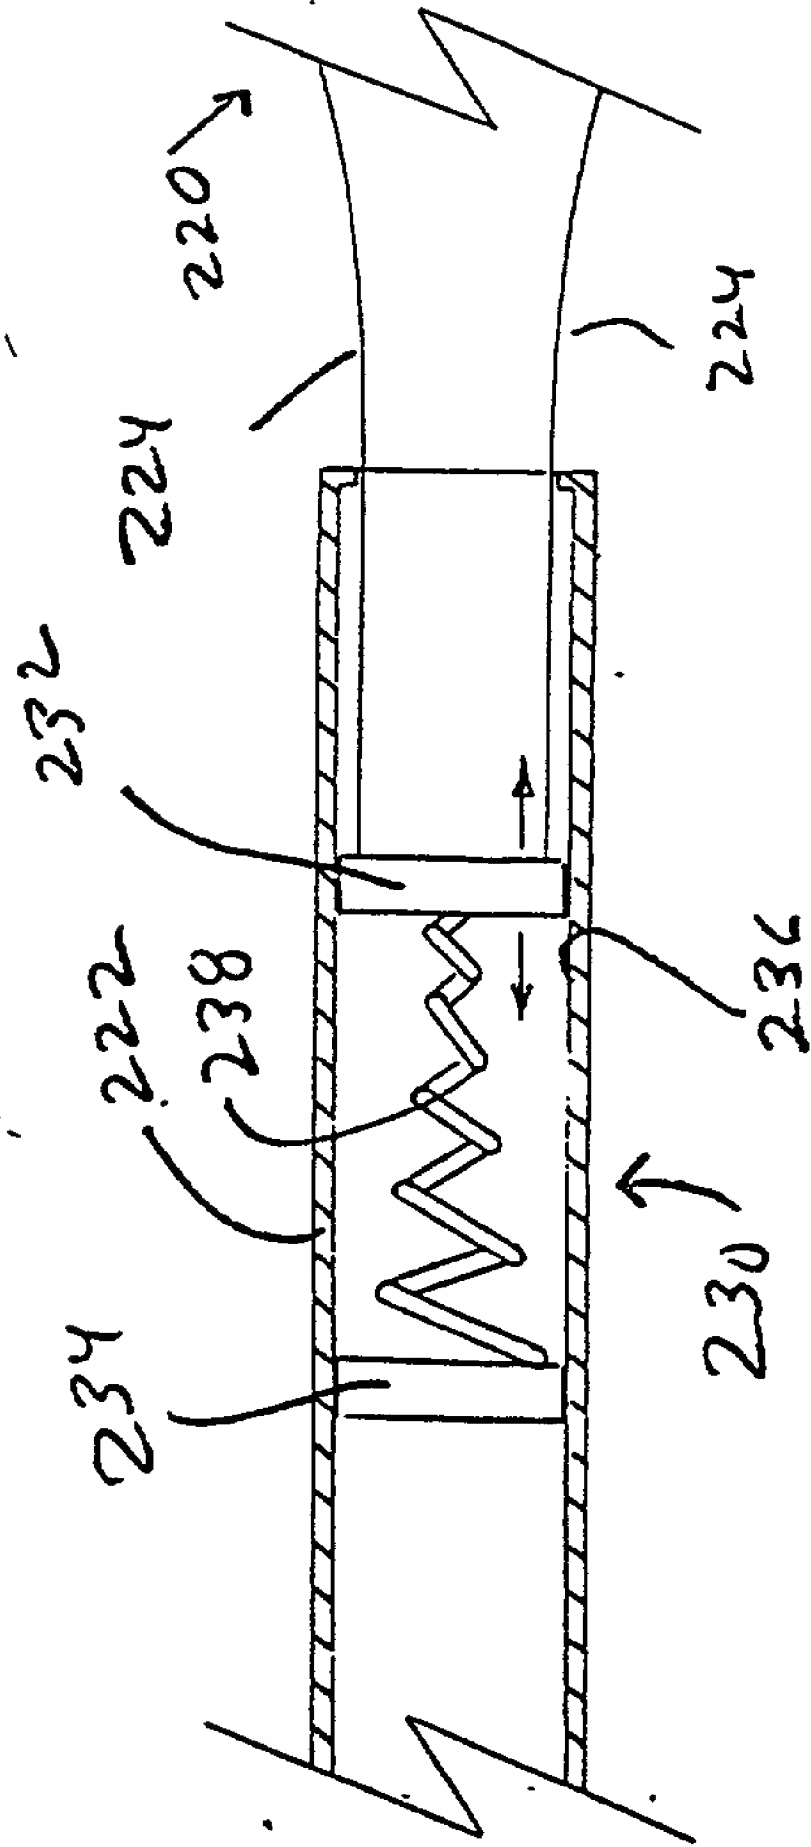


FIG. 34


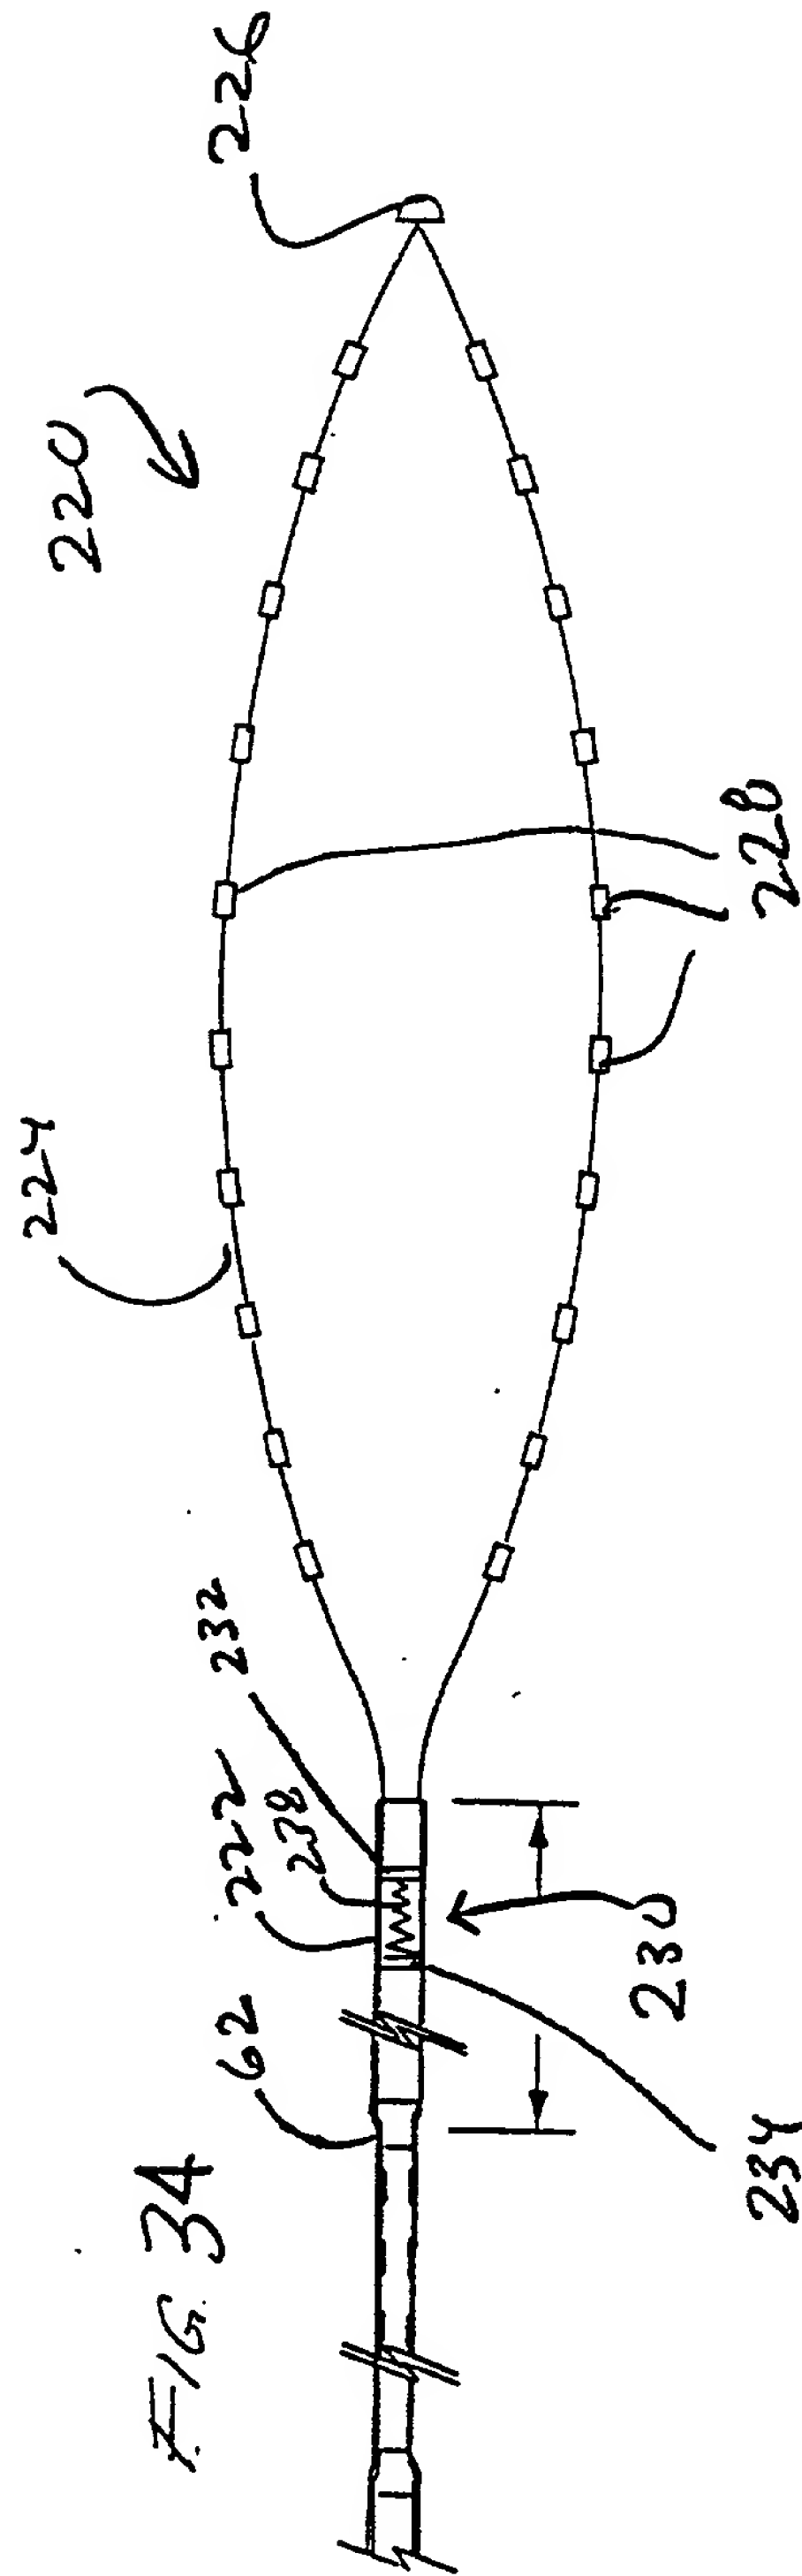


FIG. 35

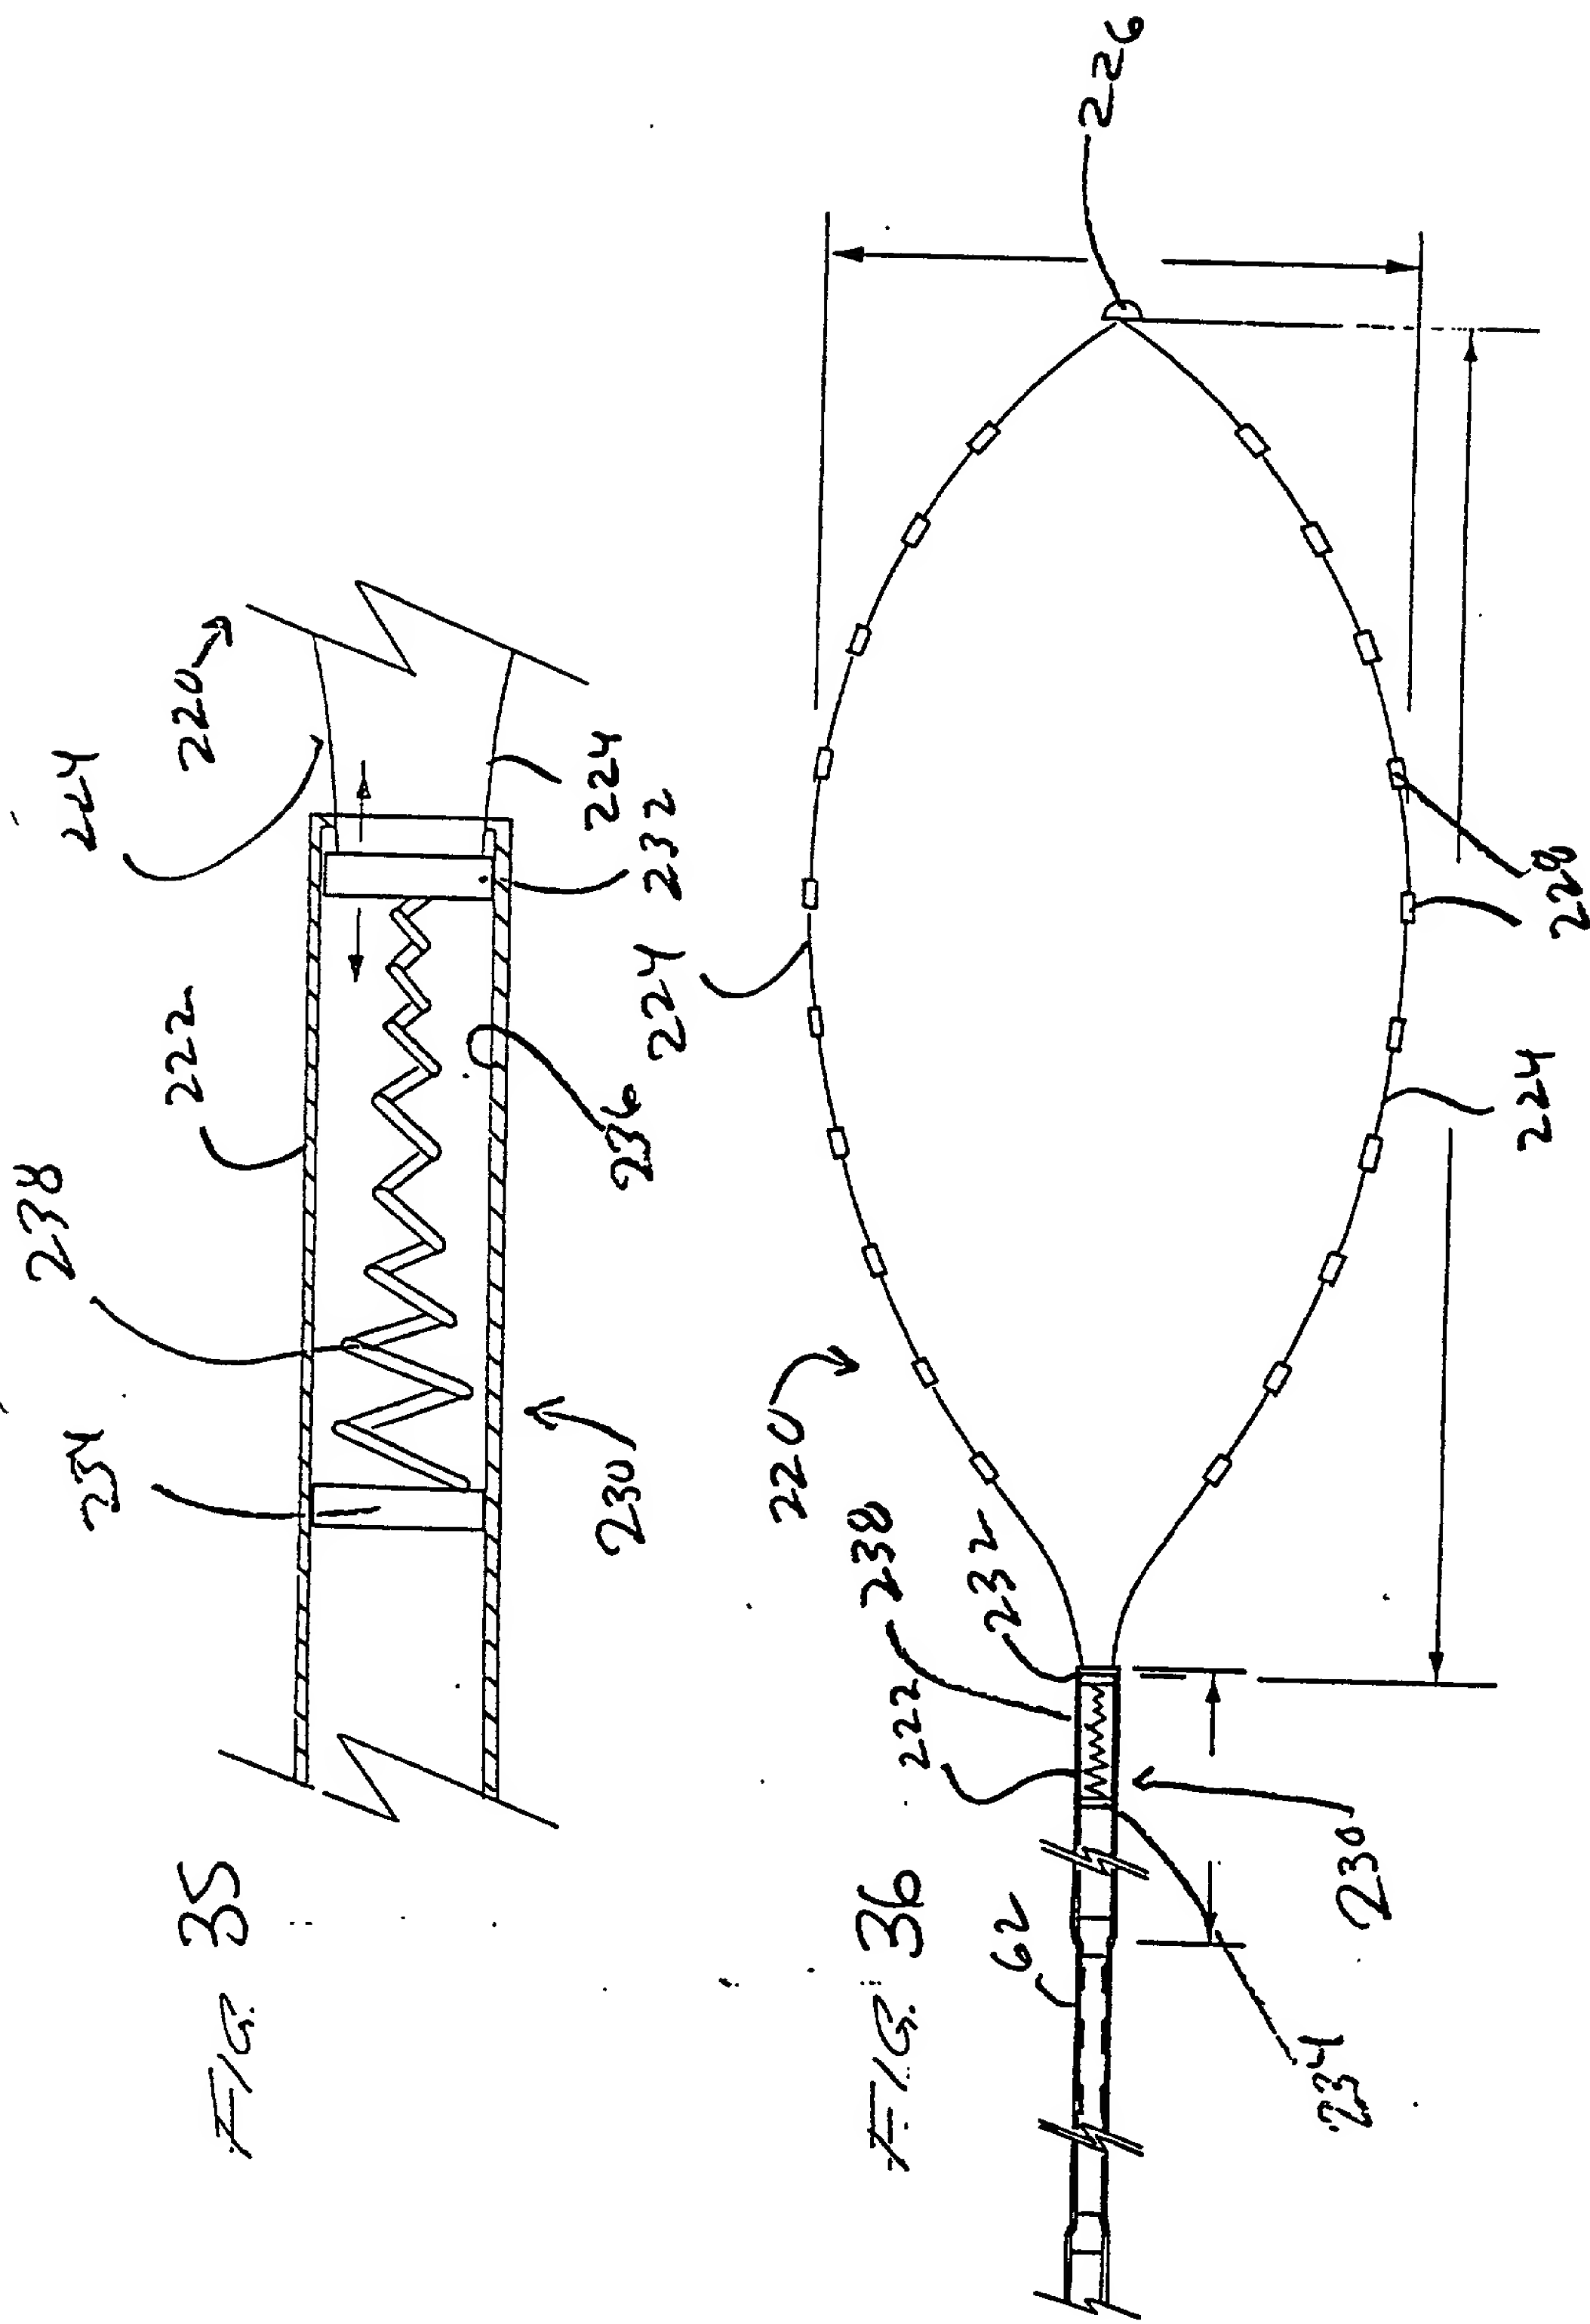

(Rev. 11-11-88, Pub. 601)

FORM 1-1

1-5

PATENT

Attorney's Docket No. 1794-B

COMBINED DECLARATION AND POWER OF ATTORNEY
 (ORIGINAL, DESIGN, NATIONAL STAGE OF PCT, SUPPLEMENTAL, DIVISIONAL,
 CONTINUATION OR CIP)

As a below named inventor, I hereby declare that:

TYPE OF DECLARATION

This declaration is of the following type: (check one applicable item below)

- ☒ original
☐ design
☐ supplemental

NOTE: If the declaration is for an International Application being filed as a divisional, continuation or continuation-in-part application do not check next item; check appropriate one of last three items.

- ☐ national stage of PCT

NOTE: If one of the following 3 items apply then complete and also attach ADDED PAGES FOR DIVISIONAL CONTINUATION OR CIP.

- ☐ divisional
☐ continuation
☐ continuation-in-part (CIP)

INVENTORSHIP IDENTIFICATION

WARNING: If the inventors are each not the inventors of all the claims an explanation of the facts, including the ownership of all the claims at the time the last claimed invention was made, should be submitted.

My residence, post office address and citizenship are as stated below next to my name. I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

TITLE OF INVENTION

Cardiac Mapping and Ablation Systems

SPECIFICATION IDENTIFICATION

the specification of which: (complete (a), (b) or (c))

- (a) ☒ is attached hereto.
 (b) ☐ was filed on _____ as ☐ Serial No. 0 / _____
 or ☐ Express Mail No., as Serial No. not yet known _____
 and was amended on _____ (if applicable).

NOTE: Amendments filed after the original papers are deposited with the PTO which contain new matter are not accorded a filing date by being referred to in the declaration. Accordingly, the amendments involved are those filed with the application papers or, in the case of a supplemental declaration, are those amendments claiming matter not encompassed in the original statement of invention or claims. See 37 CFR 1.07.

(Declaration and Power of Attorney [1-1]—page 1 of 4)

2025-09-23 16:18:18
 1794-B

- (c) ☐ was described and claimed in PCT International Application No. _____ filed on _____ and as amended under PCT Article 19 on _____ (if any).

ACKNOWLEDGEMENT OF REVIEW OF PAPERS AND DUTY OF CANDOR

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

- ☐ In compliance with this duty there is attached an information disclosure statement, 37 CFR 1.97.

PRIORITY CLAIM

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate or of any PCT International application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT International application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

(complete (d) or (e))

- (d) ☒ no such applications have been filed.
(e) ☐ such applications have been filed as follows.

NOTE: Where item (c) is entered above and the International Application which designated the U.S. claimed priority check item (e), enter the details below and make the priority claim.

**EARLIEST FOREIGN APPLICATION(S), IF ANY FILED WITHIN 12 MONTHS
(6 MONTHS FOR DESIGN) PRIOR TO THIS U.S. APPLICATION**

COUNTRY	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 37 USC 119
			<input type="checkbox"/> YES NO <input type="checkbox"/>
			<input type="checkbox"/> YES NO <input type="checkbox"/>
			<input type="checkbox"/> YES NO <input type="checkbox"/>
			<input type="checkbox"/> YES NO <input type="checkbox"/>
			<input type="checkbox"/> YES NO <input type="checkbox"/>

**ALL FOREIGN APPLICATION(S), IF ANY FILED MORE THAN 12 MONTHS
(6 MONTHS FOR DESIGN) PRIOR TO THIS U.S. APPLICATION**

(Declaration and Power of Attorney [1-1]—page 2 of 4)

SEP. 23 '92 16:19

LER RYAN&HCH

PAGE 17

FORM 1-1 1-7

POWER OF ATTORNEY

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (List name and registration number)

Henry C. Fuller (Reg. No. 22,712) Daniel D. Ryan (Reg. No. 29,243)
Ralph G. Hohenfeldt (Reg. No. 17,717) Nicholas A. Kees (Reg. No. 29,552)
Allan O. Maki (Reg. No. 20,623)

(check the following item, if applicable)

- ☐ Attached as part of this declaration and power of attorney is the authorization of the above-named attorney(s) to accept and follow instructions from my representative(s).

SEND CORRESPONDENCE TO

Daniel D. Ryan
FULLER, RYAN, HOHENFELDT & KEES, S.C.
633 West Wisconsin Avenue
Milwaukee, Wisconsin 53203

DIRECT TELEPHONE CALLS TO: (Name and telephone number)

Daniel D. Ryan
(414) 271 - 6555

DECLARATION

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

SIGNATURE(S)

Full name of sole or first inventor STUART D. EDWARDS

Inventor's signature [Signature]

Date 9/24/92 Country of Citizenship U.S.A.

Residence Los Altos, California

Post Office Address 1681 Austin Avenue

Los Altos, California 94024

Full name of second joint inventor, if any THOMAS F. KORDIS

Inventor's signature [Signature]

Date 9/24/92 Country of Citizenship U.S.A.

Residence Sunnyvale, California

Post Office Address 101 Weddell Avenue

Sunnyvale, California 94086

(Declaration and Power of Attorney (1-1)—page 3 of 4)

**CHECK PROPER BOX(ES) FOR ANY OF THE FOLLOWING ADDED PAGE(S) WHICH
FORM A PART OF THIS DECLARATION**

- ☒ Signature for third and subsequent joint inventors. *Number of pages added* 1
- ☐ Signature by administrator(trix), executor(trix) or legal representative for deceased or incapacitated inventor. *Number of pages added* _____
- ☐ Signature for inventor who refuses to sign or cannot be reached by person authorized under 37 CFR 1.47. *Number of pages added* _____
- ...
- ☐ Added pages to combined declaration and power of attorney for divisional, continuation, or continuation-in-part (CIP) application.
☐ *Number of pages added* _____
- ...
- ☐ Authorization of attorney(s) to accept and follow instructions from representative
- ...

If no further pages form a part of this Declaration then end this Declaration with this page and check the following item

- ☐ **This declaration ends with this page**

(Declaration and Power of Attorney [1-1]—page 4 of 4)

ADDED PAGE TO COMBINED DECLARATION AND POWER OF ATTORNEY
FOR SIGNATURE BY THIRD AND SUBSEQUENT INVENTORS

Full name of third joint inventor, if any DAVID E. SWANSON
Inventor's signature *David E. Swanson*
Date 9-24-92 Country of Citizenship U.S.A.
Residence San Jose, California
Post Office Address 700 S. Saratoga Avenue - Oakwood Corporate Apartments
San Jose, California 95129

Full name of fourth joint inventor, if any _____
Inventor's signature _____
Date _____ Country of Citizenship _____
Residence _____
Post Office Address _____

Full name of fifth joint inventor, if any _____
Inventor's signature _____
Date _____ Country of Citizenship _____
Residence _____
Post Office Address _____

(Added Page to Combined Declaration and Power of Attorney for Signature by Third and
Subsequent Inventors [1-2])